



CATALOGUE

COMMERCIAL AND INDUSTRIAL
REFRIGERATION UNITS
2025




High Cooling Performance

IN KIDE WE DESIGN AND MANUFACTURE
COMPREHENSIVE REFRIGERATION
SOLUTIONS FOR OUR CUSTOMERS.



+50

YEARS OF EXPERIENCE
IN THE INDUSTRY

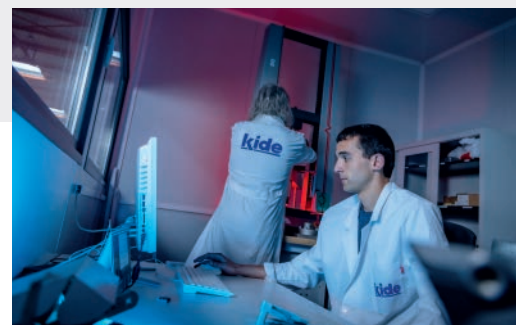

Cooperativism is in our DNA



KIDE is a cooperative company integrated in **MONDRAGON Corporation**, the leading Basque industrial group and the 10th biggest business group in Spain. It is a global benchmark for cooperativist work.

We have a unique and differential value proposition in the market



EVEREST
COLD ROOM



UNIVERSAL
COLD ROOM



INDUSTRIAL
COLD PANEL

DOORS

- Cold Room Doors
- Semi Insulated Doors
- Logistic Doors
- Fireproof Cold Room Doors



Hinged



Sliding



Service door



Swing

ACCESORIES



Polyethylene protections



PVC protections



Windows



Sanitary coving



Trims and profiles



Celing fastening systems



Alarms



Aluminium and polyethylene shelving

COLD EQUIPMENT



kide BLOCK

Compact wall or ceiling mounted monoblock refrigeration units for small volume cold rooms in medium and low temperature applications.



kide SPLIT

Commercial split refrigeration equipment for small volume cold rooms in medium, low and high temperature applications.



kide WATERLOOP

Waterloop is a commercial cooling system with indirect condensation.



kide PACK

Industrial refrigeration equipment for low, medium and high temperatures



kide CHILLER

Glycol chillers for high, medium and low temperature applications.




kide DRYER

Drying equipment, specialised in emulating the natural drying, curing and maturing processes.

CONFIGURATOR KIDE

CONFIGURE YOUR
PROJECTS WITH
DISCAFWEB

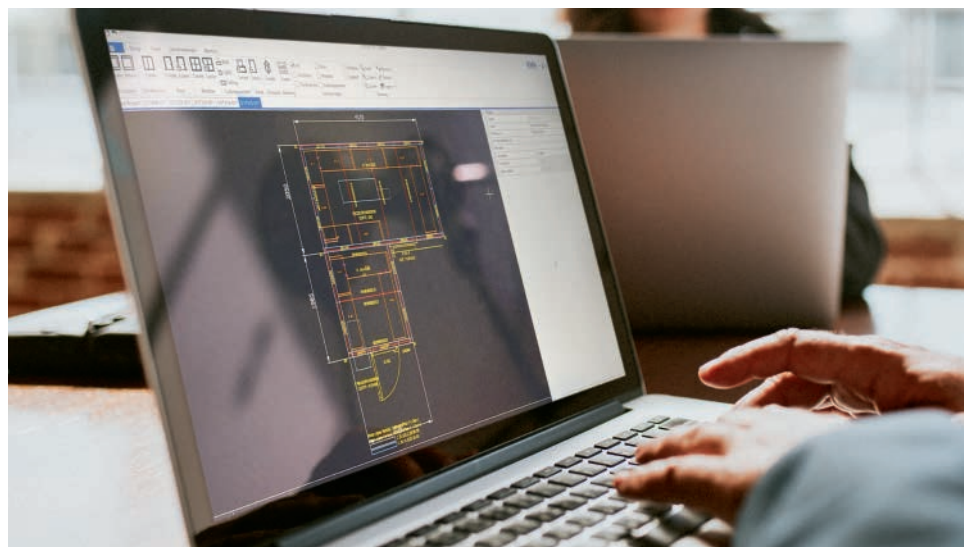





KIDE refrigeration units

COMMERCIAL EQUIPMENT

p. 15 Compact

p. 35 Split

OTHERS

p. 73 Waterloop system

p. 87 Condensing units

p. 97 Evaporators

INDUSTRIAL EQUIPMENT

p. 112 Compact / Split

p. 137 Chillers


p. 141 Drying and curing units

p. 157 Thawing units

ANNEX

Autonomous refrigeration units

At KIDE we have a wide range of autonomous units for both commercial and industrial use, for refrigeration, freezing, work rooms, tunnel freezers, cold sausages, hams and cheeses drying rooms, and meat ageing chambers.

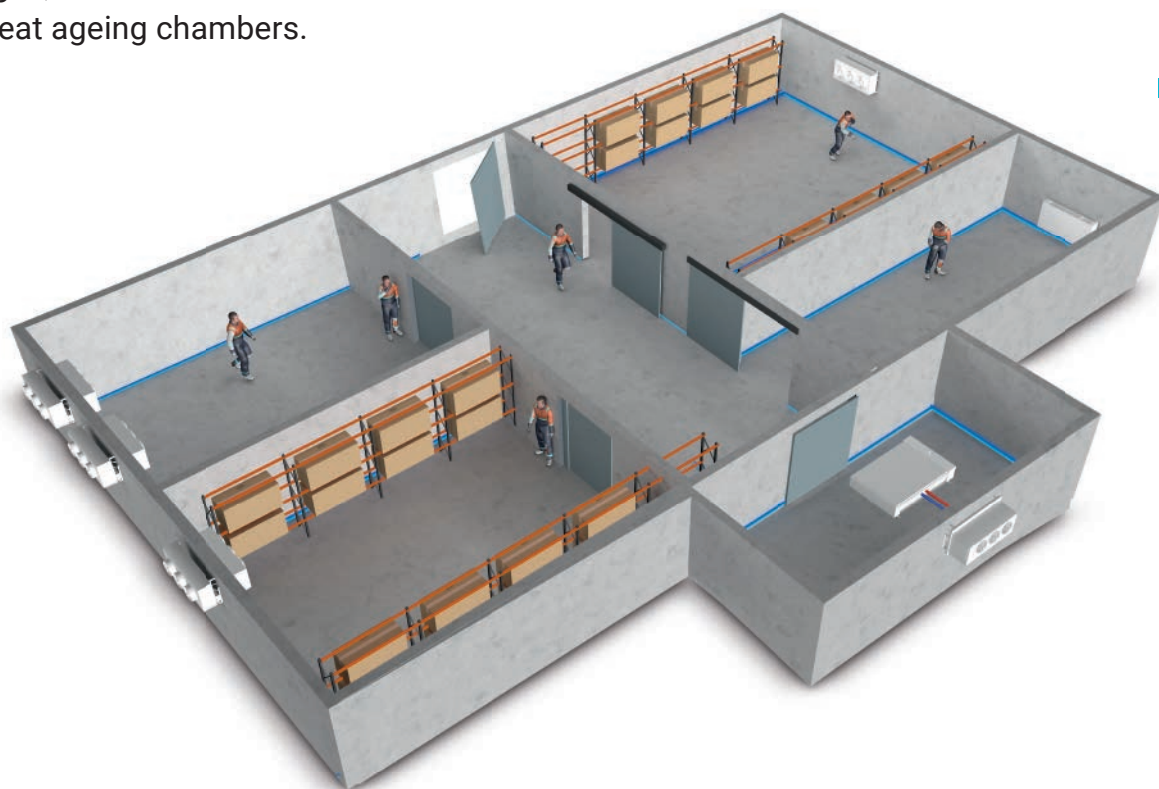

kide BLOCK

COMPACT
COMMERCIAL AND
MAXIBLOCK UNITS

kide SPLIT

SPLIT
COMMERCIAL AND
MAXISPLIT UNITS

kide PACK

COMPACT AND
SPLIT INDUSTRIAL
UNITS

kide ECI

SILENT
CONDENSING UNITS

kide WATERLOOP

WATERLOOP
SYSTEM


kide DRYER

AUTONOMOUS
DRYING UNITS

Note for the installation technician

Benefits of using autonomous Kide units compared with centralised direct HFC systems.

- Reduction in refrigerant load in facility.
- Simplicity in equipment maintenance.
- A breakdown in the mains affects all its areas with the subsequent risk of deterioration to the products stored, while with autonomous equipment, only the corresponding area will be affected and the products stored may be managed provisionally using all other areas that are operational.

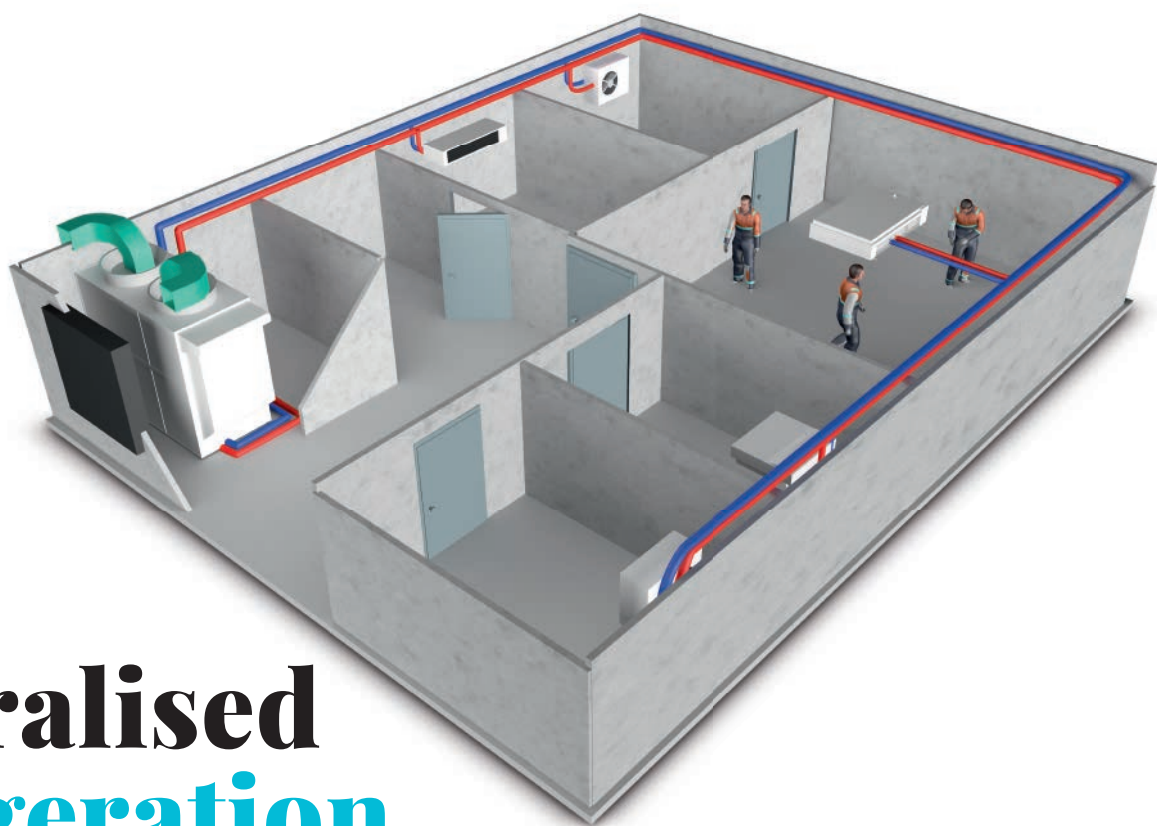

Centralised refrigeration units

For this type of refrigeration unit, Kide also has an extensive commercial and industrial range of work rooms, refrigerators, freezers and dryers.

kide ANTARTIC

CAPACITY-CONTROLLED
CONDENSER UNITS

kide CHILLER

GLYCOL
CHILLERS

kide DRYER

CENTRALISED
DRYING UNITS

Note for the installation technician

Benefits of using KIDE's centralised units

- Low HFC refrigerant load in our ANTARCTIC units.
- Use of water as a cooling resource, in addition to natural refrigerants (R-290) in KIDE chillers.
- Lower electricity consumption, ensuring better energy efficiency.

Your most sustainable option

At KIDE we are prepared for the new European F-GAS regulation.

Here are some of the most important milestones that will be progressively rolled out:



MONOBLOCK EQUIPMENT

Refrigerants with GWP < 150

FROM JANUARY 2025



SPLIT EQUIPMENT

Refrigerants with GWP < 150

FROM JANUARY 2030



GLYCOL CHILLERS

Refrigerants with GWP < 750

FROM JANUARY 2027



A2L and R-290 refrigerants are a class of low-GWP refrigerants that are used as an alternative to high GWP HFC refrigerants. They have a GWP of less than 150, which makes them a more sustainable and environmentally friendly option. KIDE has been working on the development of these ranges for some time and the aim for the coming years is to continue expanding them.

REFRIGERANT	CLASSIFICATION	GWP
R-454C	A2L	< 150
R-455A	A2L	< 150
R-290	A3	3

AT KIDE WE ARE CONSTANTLY IMPROVING OUR TECHNOLOGY TO **REDUCE GAS EMISSIONS**

Added value

Know-How, innovation and proprietary technology. Specialised team.



index

Commercial Equipment

Compacts

- 16 **kide** BLOCK -20°C 0°C
COMPACT WALL-MOUNTED
EMB
R-290
- 18 **kide** BLOCK -20°C 0°C
COMPACT WALL-MOUNTED
EMB
A2L R-455A R-454C
- 20 **kide** BLOCK -20°C 0°C
MAXIBLOCK WALL-MOUNTED
UMB
A2L R-455A R-454C
- 22 **kide** BLOCK -20°C 0°C
COMPACT WALL MOUNTED
CENTRIFUGAL
EMC
R-290
- 24 **kide** BLOCK -20°C 0°C
COMPACT WALL MOUNTED
CENTRIFUGAL
EMC
A2L R-455A R-454C
- 26 **kide** ROOF -20°C 0°C
COMPACT CEILING-MOUNTED
EMR
R-290
- 28 **kide** ROOF -20°C 0°C
COMPACT CEILING-MOUNTED
EMR
A2L R-455A R-454C
- 30 **kide** ROOF -20°C 0°C
COMPACT CEILING MOUNTED
CENTRIFUGAL
EMF
R-290
- 32 **kide** ROOF -20°C 0°C
COMPACT CEILING MOUNTED
CENTRIFUGAL
EMF
A2L R-455A R-454C

Split

- 36 **kide** SPLIT -20°C 0°C
SPLIT
ESC
A2L R-455A R-454C
- 38 **kide** MAXISPLIT -20°C 0°C
MAXISPLIT
USC
A2L R-455A R-454C
- 40 **kide** SPLIT -20°C 0°C
SPLIT
ESC
R-449A R-452A
- 42 **kide** MAXISPLIT -20°C 0°C
MAXISPLIT
USC
R-449A R-452A
- 44 **kide** SPLIT 12°C
WORK ROOMS
ESC
A2L R-455A R-454C
- 46 **kide** MAXISPLIT 12°C
WORK ROOMS
USC
A2L R-455A R-454C
- 48 **kide** SPLIT 12°C
WORK ROOMS
ESC
R-449A R-452A
- 50 **kide** MAXISPLIT 12°C
WORK ROOMS
USC
R-449A
- 52 **kide** SPLIT -20°C 0°C
CENTRIFUGAL SPLIT
ESF
A2L R-455A R-454C
- 54 **kide** SPLIT -20°C 0°C
CENTRIFUGAL SPLIT
ESF
R-449A R-452A
- 56 **kide** MAXISPLIT 12°C NEW
WORK ROOMS
ESF
A2L R-455A R-454C
- 58 **kide** MAXISPLIT 12°C NEW
WORK ROOMS
ESF
R-449A
- 60 **kide** SPLIT -20°C 0°C
SILENT SPLIT
ESS
A2L R-455A R-454C
- 62 **kide** SPLIT 12°C
WORK ROOMS
ESS
A2L R-455A R-454C
- 64 **kide** SPLIT -20°C 0°C
SILENT SPLIT
ESS
R-449A
- 66 **kide** SPLIT 12°C
WORK ROOMS
ESS
R-449A

Other

Waterloop System

- 76 **kide** BLOCK -20°C 0°C NEW
COMPACT CEILING-MOUNTED
EWR
R-290
- 78 **kide** BLOCK -20°C 0°C NEW
SILENT SPLIT
ESW
A2L R-455A R-454C
- 80 **kide** BLOCK 12°C NEW
WORK ROOMS
ESW
A2L R-455A R-454C
- 82 **kide** BLOCK -20°C 0°C NEW
SILENT CONDENSING UNITS
EWC
A2L R-455A R-454C
- 84 **kide** BLOCK -20°C 0°C
SILENT CONDENSING UNITS
EWC
R-449A
- 86 **kide** BLOCK -20°C 0°C
AIR COOLERS WITH
HYDRAULIC SYSTEM
USI

Industrial equipment

Annex

Condensing units

88 **kide** ECI **NEW**
**SILENT
CONDENSING UNITS
ECI**
 R-455A R-454C

90 **kide** ECI
**SILENT
CONDENSING UNITS
ECI**
R-449A

92 **kide** ANTARTIC
**CONDENSING UNITS
WITH VARIABLE
REFRIGERATION CAPACITY
ANTARTIC**
R-449A

96 **ANTARTIC
WATERLOOP SYSTEM**

Evaporators

98
LOW-PROFILE EVAPORATORS
 R-455A R-454C

100
LOW-PROFILE EVAPORATORS
R-449A

102
CUBIC EVAPORATORS
 R-455A R-454C

104
CUBIC EVAPORATORS
R-449A

106
DOUBLE FLOW EVAPORATORS
 R-455A R-454C

108
DOUBLE FLOW EVAPORATORS
R-449A

Compact / Split

112 **kide** PACK
**HIGH TEMPERATURE
KPA**
 R-455A R-454C
R-449A R-513A

114 **kide** PACK
**MEDIUM TEMPERATURE
KPM**
 R-455A R-454C
R-449A R-513A

116 **kide** PACK
**MEDIUM TEMPERATURE AND
HIGH RELATIVE HUMIDITY
KPMH**
 R-455A R-454C
R-449A R-513A

118 **kide** PACK
**LOW TEMPERATURE
KPB**
 R-455A R-454C
R-449A

120 **kide** PACK
**FROZEN FOOD
PRESERVATION
KPC**
R-452A

122 **kide** PACK
**FREEZING TUNNEL
KPTC**
 R-455A R-452A R-449A

124 **kide** PACK
**TWO STAGE FREEZING TUNNEL
KPDE**
R-452A

126 **kide** PACK
**MEDIUM-LOW
KPMB**
 R-455A R-454C
R-449A

128 **kide** PACK
**LOW-MEDIUM
KPBH**
 R-455A R-454C
R-449A

Chillers

138 **GLYCOL CHILLERS**
 R-455A R-454C

140 **COOLING BATTERIES**
WATER + ETHYLENGLICOL OR PROPYLENGLICOL

Drying and curing units

142 **kide** MINI DRYER **NEW**
**COMPACT MINI DRYER
EMS**
 R-455A R-454C

144 **kide** MINI DRYER
**DRIED HAM,
SAUSAGE AND
CHEESE MINI DRYERS
KSP - COMPACTO**
 R-455A R-454C

145 **kide** MINI DRYER
**DRIED HAM,
SAUSAGE AND
CHEESE MINI DRYERS
KSP - SPLIT**
 R-455A R-454C R-449A

150 **kide** DRYER
**HAM DRYING UNITS
KSJ**
 R-455A R-454C R-449A R-513A

151 **kide** DRYER
**SAUSAGE DRYING UNITS
KSC**
 R-455A R-454C R-449A R-513A

152 **kide** DRYER
**CHEESE DRYING UNITS
KSQ**
 R-455A R-454C R-449A R-513A

Thawing units

146 **THAWING UNITS
KD**
 R-455A R-454C R-449A

160 **ELECTRONIC CONTROL**

165 **HEAT RECOVERY**

167 **SPLIT UNITS
WITH INDEPENDENT
ELECTRICAL PANEL**

168 **CALCULATION BASIS.
COMMERCIAL EQUIPMENT**

169 **CALCULATION BASIS.
INDUSTRIAL EQUIPMENT**



A decorative background on the left side of the page featuring a green leaf pattern, possibly from a plant like a philodendron, with large, heart-shaped leaves and prominent veins.

COMMERCIAL EQUIPMENT

Compact

- p. 16 Compact wall-mounted
[EMB](#) · R-290
- p. 18 Compact wall-mounted
[EMB](#) · A2L
- p. 20 Maxiblock wall-mounted
[UMB](#) · A2L
- p. 22 Compact wall mounted
centrifugal
[EMC](#) · R-290
- p. 24 Compact wall mounted
centrifugal
[EMC](#) · A2L
- p. 26 Compact ceiling-mounted
[EMR](#) · R-290
- p. 28 Compact ceiling-mounted
[EMR](#) · A2L
- p. 30 Compact ceiling mounted
centrifugal
[EMF](#) · R-290
- p. 32 Compact ceiling mounted
centrifugal
[EMF](#) · A2L

kide**BLOCK****-20°C****0°C****COMMERCIAL EQUIPMENT****COMPACT
WALL-MOUNTED****EMB**

Compact commercial wall-mounted refrigeration units for small volume cold storage rooms in medium and low temperature applications.

R-290**GENERAL CHARACTERISTICS**

- Pre-charged with refrigerant.
- Hermetic compressor.
- Expansion by thermostatic valve.
- High-pressure control.
- Automatic defrosting by hot gas.
- System for partial evaporation of defrosting water.
- Cable for supply, light and door micro switch (2,5 m).
- Multi-function electronic control integrated in the front panel.
- Watertight light point with energy-saving LED bulb.
- Ceramic filter dryer.
- Probe alert "dirty condenser".
- Isolation panel included.
- Install under roof.
- Air extraction fan.

OPTIONS

- Winter Kit.
- Rotation / failure system for two units.
- Synchronized defrost system for two units.
- Voltage protector.
- Anti-corrosion treatment on condenser / evaporator coil.
- Time control.
- Humidifier external to the equipment and control (cooling).
- Anti-corrosive treatment for the condenser unit furniture.
- Monitoring and control system. See page 69.

Xwzb**ELECTRONIC CONTROLLER**

The XW60LH electronic controller, standard on our commercial compact units, is an advanced controller with a small footprint.

- Temperature control with maximum and minimum temperature recordings.
- "Jet Cool" function for rapid cooling.
- Intelligent defrosting.



0 °C -5 °C ÷ 10 °C		Refrigeration capacity	°C EXT	°C EXT		Compressor		R-290	Nominal consumption	Max. load current	Flow condens. evapora.	Noise level	Weight
Series	Model	W	m³	m³		HP	kW	kg	A	A	m³/h	dBA	kg
000	EMB0004M1P	635	5	4	230/1/50	1/3	0,25	<0,1	2,7	3,1	685 - 650	34	65
100	EMB1006M1P	1.050	9	7	230/1/50	1/2	0,4	<0,15	2,8	3,7	1.100 - 880	34	65
	EMB1007M1P	1.340	12	9	230/1/50	3/4	0,5	<0,16	3,5	4,7	1.100 - 880	34	65
200	EMB2010M1P	1.825	17	15	230/1/50	1 1/4	0,9	<0,15	6,6	8,2	2.000 - 1.250	34	95
	EMB2015M1P	2.300	27	23	230/1/50	1 1/2	1,1	<0,2	7,4	9,5	2.000 - 1.225	34	95
	EMB2020M1P	2.750	36	28	230/1/50	1 3/4	1,3	<0,3	8,9	11,5	2.000 - 1.225	34	95

i If the equipment is to operate in a working range between 0 and -5°C, it will be necessary to include a drain resistor. (Consult the technical office).


-20 °C -25 °C ÷ -15 °C		Refrigeration capacity	°C EXT	°C EXT		Compressor		R-290	Nominal consumption	Max. load current	Flow condens. evapora.	Noise level	Weight
Series	Model	W	m³	m³		HP	kW	kg	A	A	m³/h	dBA	kg
000	EMB0004L1P	440	3	2	230/1/50	1/2	0,4	<0,1	2,5	3,3	700 - 675	34	65
100	EMB1010L1P	660	4	3	230/1/50	3/4	0,5	<0,15	3,0	3,9	1.100 - 880	34	65
	EMB1015L1P	920	6	5	230/1/50	1 1/4	0,9	<0,15	4,4	6,1	1.100 - 880	34	65
200	EMB2015L1P	1.280	11	8	230/1/50	1 1/2	1,1	<0,5	5,8	8,0	2.000 - 1.250	34	95
	EMB2020L1P	1.400	15	10	230/1/50	1 3/4	1,3	<0,3	6,2	8,6	2.000 - 1.250	34	95

DIMENSIONS

Unit							
Series	A	B	C	D	E	F	G
000	590	426	734	307	327	290	350
100	730	460	915	360	455	355	390
200	800	690	1.000	410	470	355	620

Cut	
H	L
373	330
415	400
640	410

Unit + EMB. / PACK.			
A	B	C	kg
876	505	965	80
876	505	965	80
1.126	740	1.070	110

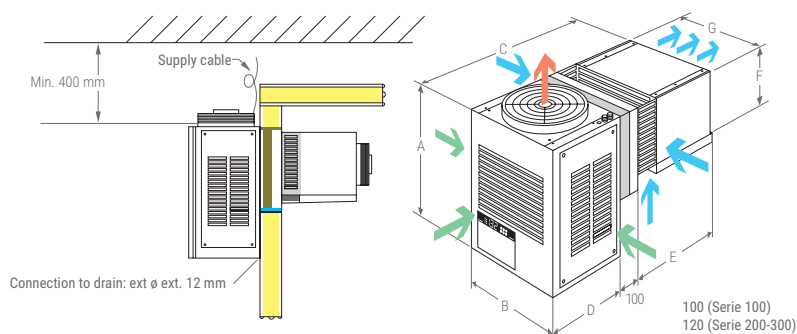

kide**BLOCK****-20°C****0°C****COMMERCIAL EQUIPMENT****COMPACT
WALL-MOUNTED****EMB**

Compact commercial wall-mounted refrigeration units for small volume cold storage rooms in medium and low temperature applications.

**R-455A
R-454C****A2L****GENERAL CHARACTERISTICS**

- Pre-charged with refrigerant.
- Hermetic compressor.
- Expansion by thermostatic valve.
- High and low-pressure control.
- Automatic defrosting by hot gas.
- System for partial evaporation of defrosting water.
- Cable for supply, light and door micro switch (2,5 m).
- Multi-function electronic control integrated in the front panel.
- Watertight light point with energy-saving LED bulb.
- Condensation control by pressure switch.
- Ceramic filter dryer.
- Probe alert "dirty condenser".
- Isolation panel included.
- Install under roof.
- Watertight electrical panel.
- Air extraction fan.

OPTIONS

- Refrigerant R-454C.
- Winter Kit.
- Rotation / failure system for two units.
- Synchronized defrost system for two units.
- Voltage protector.
- Anti-corrosion treatment on condenser / evaporator coil.
- Time control.
- Humidifier external to the equipment and control (cooling).
- Anti-corrosive treatment for the condenser unit furniture.
- Monitoring and control system. See page 69.

Xwzb**ELECTRONIC CONTROLLER**

The XW60LH electronic controller, standard on our commercial compact units, is an advanced controller with a small footprint.

- Temperature control with maximum and minimum temperature recordings.
- "Jet Cool" function for rapid cooling.
- Intelligent defrosting.



All compact units in the commercial range using A2L refrigerants (R-455A and R-454C) are excluded* from the scope of the Regulation on Safety for Refrigeration Installations (RSIF).

* The exclusion of these units does not mean that the entire installation is exempt from the application of this REGULATION regarding design, safety conditions, and communication with the administration.

0 °C -5 °C ÷ 10 °C		Refrigeration capacity	°C EXT	°C EXT		Compressor		R-455A	Nominal consumption	Max. load current	Flow	Noise level	Weight
Series	Model	W	m³	m³		HP	kW	kg	A	A	condens. evapora. m³/h	dBA	kg
100	EMB1006M1G	1.145	9	7	230/1/50	3/4	0,5	<1	4,8	7,0	1.100 - 880	34	75
	EMB1007M1G	1.475	12	9	230/1/50	1	0,7	<1	5,3	8,2	1.100 - 880	34	75
200	EMB2010M1G	1.750	16	14	230/1/50	1 1/4	0,9	<1,4	8,2	10,2	1.920 - 1.760	40	95
	EMB2015M5G	2.000	20	17	400/3/50	1 1/2	1,1	<1,4	3,3	4,0	1.920 - 1.760	42	95
300	EMB3017M5G	2.510	30	25	400/3/50	1 3/4	1,3	<1,6	3,6	4,7	1.920 - 1.920	43	100
	EMB3020M5G	3.100	40	32	400/3/50	2	1,5	<1,6	4,3	5,7	1.920 - 1.920	45	100

i If the equipment is to operate in a working range between 0 and -5°C, it will be necessary to include a drain resistor. (Consult the technical office).


-20 °C -25 °C ÷ -15 °C		Refrigeration capacity	°C EXT	°C EXT		Compressor		R-455A	Nominal consumption	Max. load current	Flow	Noise level	Weight
Series	Model	W	m³	m³		HP	kW	kg	A	A	condens. evapora. m³/h	dBA	kg
100	EMB1010L1G	850	5	4	230/1/50	3/4	0,5	<1	3,3	6,4	1.100 - 880	34	74
	EMB1015L1G	1.100	8	5	230/1/50	1 1/4	0,9	<1	5,2	8,1	1.100 - 880	35	70
200	EMB2015L1G	1.350	15	10	230/1/50	1 3/4	1,3	<1,5	6,5	9,9	1.920 - 1.760	40	106
300	EMB3017L5G	1.500	21	14	400/3/50	2	1,5	<2	3,1	3,9	1.920 - 1.920	44	105
	EMB3020L5G	2.000	25	18	400/3/50	2 1/2	1,8	<2	4,7	6,7	1.920 - 1.920	45	105

DIMENSIONS

Unit							
Series	A	B	C	D	E	F	G
100	730	460	915	360	455	355	390
200	800	690	1.000	410	470	355	620
300	800	740	1.050	410	520	420	670

Cut	
H	L
415	400
640	410
690	475

Unit + EMB. / PACK.			
A	B	C	kg
876	505	965	80
1.126	740	1.070	110
966	780	1.105	120

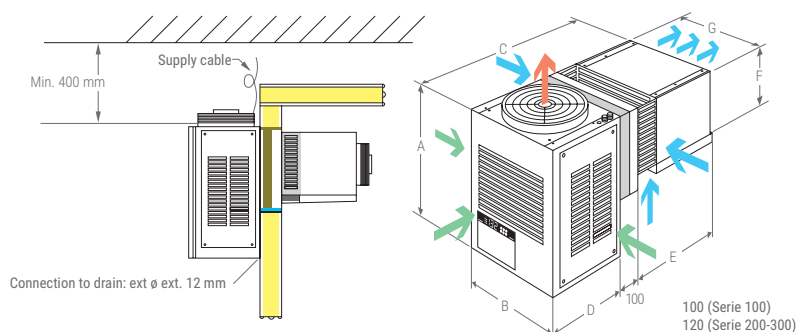

kide**BLOCK****-20°C****0°C****COMMERCIAL EQUIPMENT****MAXIBLOCK
WALL-MOUNTED****UMB**

Maxiblock compact refrigeration units for medium volume cold storage rooms in medium and low temperature applications.

**R-455A
R-454C****A2L****GENERAL CHARACTERISTICS**

- Pre-charged with nitrogen.
- Reciprocating hermetic or semi-hermetic compressor depending on the model.
- Expansion by thermostatic valve.
- Liquid receiver with safety valve.
- Ceramic filter dryer.
- Isolation panel included.
- Sight glass in the condensing unit.
- High and low-pressure control.
- Automatic defrosting by hot gas.
- Remote multifunctional electronic control.
- Condensation control by pressure switch.
- Probe alert "dirty condenser".
- Voltage protector.
- Magnetothermic protection.
- Watertight electrical panel.
- Maneuver for air extraction in case of refrigerant in the environment.

OPTIONS

- Refrigerant R-454C.
- Refrigerant charged.
- Winter Kit.
- Rotation / failure system for two units.
- Synchronized defrost system for two units.
- Anti-corrosion treatment on condenser / evaporator coil.
- Time control.
- Semi-hermetic compressor for models with a hermetic compressor.
- Humidifier external to the equipment and control (cooling).
- Special wooden packaging for container shipment.
- Monitoring and control system. See page 69.

Xwzb**ELECTRONIC CONTROLLER**

KIDE-Split units incorporate the advanced XW60K-2DI electronic controller as standard.

- Temperature control with maximum and minimum temperature recordings.
- "Jet Cool" function for rapid cooling
- Intelligent defrost.



CALCULATION BASIS - Pag. 168

0 °C -5 °C ÷ 10 °C		Refrigeration capacity	°C EXT	°C EXT		Compressor		R-455A	Nominal consumption	Max. load current	Flow condens. evapora.	Noise level	Weight
Series	Model	W	m³	m³		HP	kW		A	A	m³/h	dBA	kg
500	UMB5035M5G	6.010	108	85	400/3/50	3 1/2	2,6	NITROGEN	8,1	9,5	5.580 - 7.030	47	198
600	UMB6040M5G	7.150	130	100	400/3/50	4	3		8,7	10,4	6.300 - 5.600	48	250
	UMB6050M5G	8.010	170	140	400/3/50	5	3,7		9,1	11,7	5.200 - 5.600	49	260
700	UMB7065M5G	10.740	210	185	400/3/50	6 1/2	4,8		13,8	16,4	11.160 - 5.360	50	325
	UMB7070M5G	12.370	290	230	400/3/50	7	5,2		14,8	18	7.500 - 5.360	52	355
800	UMB8100M5G	16.960	380	315	400/3/50	10	7,5		23,4	26,5	9.600 - 11.500	53	400
	UMB8130M5G	20.800	480	400	400/3/50	13	9,7		26,8	33,6	9.600 - 11.500	53	430
	UMB8150M5G	25.900	590	530	400/3/50	15	11,2		30,3	36,1	13.500 - 10.400	58	480
	UMB8220M5G	30.900	800	620	400/3/50	22	16,4		31,7	37,8	13.500 - 15.000	60	640



-20 °C -25 °C ÷ -15 °C		Refrigeration capacity	°C EXT	°C EXT		Compressor		R-455A	Nominal consumption	Max. load current	Flow condens. evapora.	Noise level	Weight
Series	Model	W	m³	m³		HP	kW		A	A	m³/h	dBA	kg
500	UMB5050L5G	4.325	76	56	400/3/50	5	3,7	NITROGEN	10,4	15,3	3.200 - 3.200	51	205
600	UMB6060L5G	5.300	111	77	400/3/50	6	4,7		12,7	19,1	5.200 - 5.600	51	260
	UMB6075L5G	6.800	130	105	400/3/50	7 1/2	6,2		16,8	23,9	5.200 - 5.600	52	270
700	UMB7130L5G	10.200	340	200	400/3/50	13	6,4		19,2	34,3	5.600 - 5.400	55	360
800	UMB8150L5G	15.450	420	340	400/3/50	15	9		24,9	40,6	9.600 - 11.300	53	620
	UMB8200L5G	17.400	510	420	400/3/50	20	11,95		28,1	44,9	13.500 - 11.300	55	640
	UMB8250L5G	21.100	620	510	400/3/50	25	15,15		35,1	56,3	13.500 - 15.000	55	640

DIMENSIONS

Unit								
Series	A	B	C	D	E	F	H	I
500	770	1.002	590	440	1.145	390	1.425	1.372
600	770	1.180	590	565	1.565	400	1.465	1.815
700	815	1.570	650	565	1.565	400	1.696	2.065
800	945	2.050	790	675	1.965	450	1.800	2.240

Cut	
J	K
1.214	699
1.680	674
1.914	727
2.060	925

Unit + EMB. / PACK.			
A	B	C	kg
1.640	1.310	975	240
1.720	1.630	1.000	290
2.125	1.630	1.050	380
1.520	2.250	2.360	440

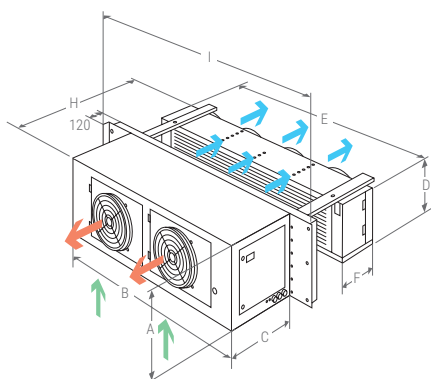



COMMERCIAL EQUIPMENT

COMPACT WALL MOUNTED CENTRIFUGAL

EMC

Compact commercial wall-mounted refrigeration units for small volume cold storage rooms, with centrifugal fan, for use in medium and low temperature applications.

R-290



GENERAL CHARACTERISTICS

- Pre-charged with refrigerant.
- Hermetic compressor.
- Expansion by thermostatic valve.
- High-pressure control.
- Automatic defrosting by hot gas.
- System for partial evaporation of defrosting water.
- Cable for supply, light and door micro switch (2,5 m).
- Multi-function electronic control integrated in the front panel.
- Watertight light point with energy-saving LED bulb.
- Ceramic filter dryer.
- Probe alert "dirty condenser".
- Isolation panel included.
- Install under roof.
- Centrifugal fan in condenser (max. driving distance 10 m).
- Air extraction fan.

OPTIONS

- Winter Kit.
- Rotation / failure system for two units.
- Synchronized defrost system for two units.
- Voltage protector.
- Anti-corrosion treatment on condenser / evaporator coil.
- Time control.
- Humidifier external to the equipment and control (cooling).
- Exhaust air duct.
- Anti-corrosive treatment for the condenser unit furniture.
- Monitoring and control system. See page 69.

Xwzb

ELECTRONIC CONTROLLER

The XW60LH electronic controller, standard on our commercial compact units, is an advanced controller with a small footprint.

- Temperature control with maximum and minimum temperature recordings.
- "Jet Cool" function for rapid cooling.
- Intelligent defrosting.



0 °C -5 °C ÷ 10 °C		Refrigeration capacity	°C EXT	°C EXT		Compressor		R-290	Nominal consumption	Max. load current	Flow condens. evapora.	Noise level	Weight
Series	Model	W	m³	m³		HP	kW	kg	A	A	m³/h	dBA	kg
000	EMC0004M1P	635	5	4	230/1/50	1/3	0,25	<0,1	3,0	3,5	685 - 650	34	65
100	EMC1006M1P	1.050	9	7	230/1/50	1/2	0,4	<0,15	3,1	4,0	1.100 - 880	34	65
	EMC1007M1P	1.340	12	9	230/1/50	3/4	0,5	<0,16	4,5	5,8	1.100 - 880	34	65
200	EMC2010M1P	1.825	17	15	230/1/50	1 1/4	0,9	<0,15	7,2	8,7	2.000 - 1.250	34	95
	EMC2015M1P	2.300	27	23	230/1/50	1 1/2	1,1	<0,2	7,8	10,0	2.000 - 1.225	34	95
	EMC2020M1P	2.750	36	28	230/1/50	1 3/4	1 1/3	<0,3	9,4	12,1	2.000 - 1.225	34	95

i If the equipment is to operate in a working range between 0 and -5 °C, it will be necessary to include a drain resistor. (Consult the technical office).



-20 °C -25 °C ÷ -15 °C		Refrigeration capacity	°C EXT	°C EXT		Compressor		R-290	Nominal consumption	Max. load current	Flow condens. evapora.	Noise level	Weight
Series	Model	W	m³	m³		HP	kW	kg	A	A	m³/h	dBA	kg
000	EMC0004L1P	440	3	2	230/1/50	1/2	0,4	<0,1	2,9	3,6	700 - 675	34	65
100	EMC1010L1P	660	4	3	230/1/50	3/4	0,5	<0,15	3,3	4,2	1.100 - 880	34	65
	EMC1015L1P	920	6	5	230/1/50	1 1/4	0,9	<0,15	4,8	6,4	1.100 - 880	34	65
200	EMC2015L1P	1.280	11	8	230/1/50	1 1/2	1,1	<0,15	6,3	7,8	2.000 - 1.250	34	95
	EMC2020L1P	1.400	15	10	230/1/50	1 3/4	1,3	<0,3	6,7	9,1	2.000 - 1.250	34	95

DIMENSIONS

Unit								
Series	A	B	C	D	E	F	G	H
000	590	426	734	307	327	290	350	180
100	655	460	910	360	450	355	390	200
200	705	690	1.000	410	470	355	620	200

Cut	
H	L
373	330
415	400
640	460

Unit + EMB. / PACK.			
A	B	C	kg
876	505	965	80
1.205	505	965	80
1.476	740	1.070	110

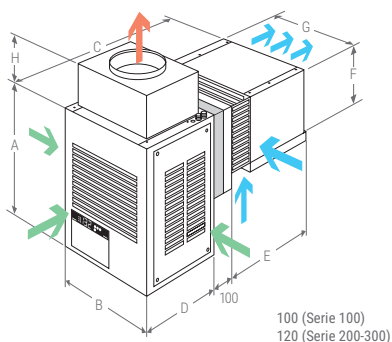

kide**BLOCK****-20°C****0°C****COMMERCIAL EQUIPMENT****COMPACT
WALL MOUNTED
CENTRIFUGAL****EMC**

Compact commercial wall-mounted refrigeration units for small volume cold storage rooms, with centrifugal fan, for use in medium and low temperature applications.

**R-455A
R-454C****A2L****GENERAL CHARACTERISTICS**

- Pre-charged with refrigerant.
- Hermetic compressor.
- Expansion by thermostatic valve.
- High and low-pressure control.
- Automatic defrosting by hot gas.
- System for partial evaporation of defrosting water.
- Centrifuge fan in the condenser (Max. length 10m, min. diameter 250 mm Series 100 and 315 mm Series 200-300).
- Cable for supply, light and door micro switch (2,5 m).
- Integrated multifunctional electronic control.
- Watertight light point with energy-saving LED bulb.
- Condensation control by pressure switch.
- Ceramic filter dryer.
- Probe alert "dirty condenser".
- Isolation panel included.
- Indoor use.
- Watertight electrical panel.
- Air extraction fan.

OPTIONS

- Refrigerant R-454C.
- Winter Kit.
- Rotation / failure system for two units.
- Synchronized defrost system for two units.
- Voltage protector.
- Anti-corrosion treatment on condenser / evaporator coil.
- Exhaust air duct.
- Time control.
- Humidifier external to the equipment and control (cooling).
- Anti-corrosive treatment for the condenser unit furniture.
- Monitoring and control system. See page 69.

Xwzb**ELECTRONIC CONTROLLER**

The XW60LH electronic controller, standard on our commercial compact units, is an advanced controller with a small footprint.

- Temperature control with maximum and minimum temperature recordings.
- "Jet Cool" function for rapid cooling.
- Intelligent defrosting.



All compact units in the commercial range using A2L refrigerants (R-455A and R-454C) are excluded* from the scope of the Regulation on Safety for Refrigeration Installations (RSIF).

* The exclusion of these units does not mean that the entire installation is exempt from the application of this REGULATION regarding design, safety conditions, and communication with the administration.




0 °C -5 °C ÷ 10 °C		Refrigeration capacity	°C EXT	°C EXT		Compressor		R-455A	Nominal consumption	Max. load current	Flow condens. evapora.	Noise level	Weight
Series	Model	W	m³	m³			kW	kg	A	A	m³/h	dBA	kg
100	EMC1006M1G	1.145	9	7	230/1/50	3/4	0,5	<1	5,2	7,3	1.030 - 880	34	77
	EMC1007M1G	1.475	12	9	230/1/50	1	0,7	<1	5,6	8,6	1.030 - 880	34	77
200	EMC2010M1G	1.750	16	14	230/1/50	1 1/4	0,9	<1,4	8,9	10,8	1.370 - 1.760	40	98
	EMC2015M5G	2.000	20	17	400/3/50	1 1/2	1,1	<1,4	3,9	4,6	1.370 - 1.760	40	98
300	EMC3017M5G	2.510	30	25	400/3/50	1 3/4	1,3	<1,6	4,3	5,4	1.370 - 1.920	43	103
	EMC3020M5G	3.100	40	32	400/3/50	2	1,5	<1,6	5,0	6,4	1.370 - 1.920	45	103


i If the equipment is to operate in a working range between 0 and -5 °C, it will be necessary to include a drain resistor. (Consult the technical office).

-20 °C -25 °C ÷ -15 °C		Refrigeration capacity	°C EXT	°C EXT		Compressor		R-455A	Nominal consumption	Max. load current	Flow condens. evapora.	Noise level	Weight
Series	Model	W	m³	m³		HP	kW	kg	A	A	m³/h	dBA	kg
100	EMC1010L1G	850	5	4	230/1/50	3/4	0,5	<1	3,6	6,8	1.030 - 880	34	76
	EMC1015L1G	1.100	8	5	230/1/50	1 1/4	0,9	<1	5,6	8,5	1.030 - 880	35	72
200	EMC2015L1G	1.350	15	10	230/1/50	1 3/4	1,3	<1,5	7,1	10,5	1.370 - 1.760	40	109
300	EMC3017L5G	1.500	21	14	400/3/50	2	1,5	<2	3,8	4,6	1.370 - 1.920	44	108
	EMC3020L5G	2.000	25	18	400/3/50	2 1/2	1,8	<2	5,4	7,4	1.370 - 1.920	45	108

DIMENSIONS

Unit									Cut		Unit + EMB. / PACK.			
Series	A	B	C	D	E	F	G	H	J	K	A	B	C	kg
100	655	460	910	360	450	355	390	200	415	400	1.205	505	965	80
200	705	690	1.000	410	470	355	620	200	640	410	1.476	740	1.070	110
300	705	735	1.050	410	520	420	670	200	690	475	1.126	780	1.105	120

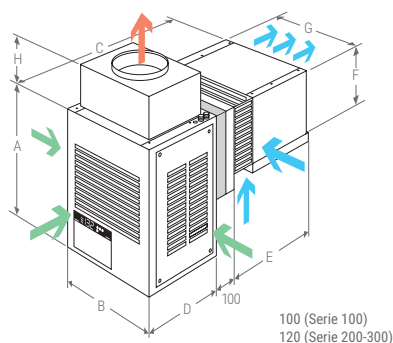



COMMERCIAL EQUIPMENT

COMPACT CEILING-MOUNTED

EMR

Compact commercial ceiling-mounted refrigeration units for small volume cold storage rooms for use in medium and low temperature applications.

R-290



GENERAL CHARACTERISTICS

- High pressure switch.
- Pre-charged with refrigerant.
- Hermetic compressor.
- Expansion by thermostatic valve.
- High-pressure control.
- Automatic defrosting by hot gas.
- System for partial evaporation of defrosting water.
- Cable for supply, light and door micro switch (2,5 m).
- Remote multifunctional electronic control (5 m).
- Watertight light point with energy-saving LED bulb.
- Filter dryer.
- Evaporator located in a totally hermetic and insulated enclosure.
- High performance optimized air flow in the evaporator.
- Install under roof.
- Probe alert "dirty condenser".
- Air extraction fan.

OPTIONS

- Winter Kit.
- Rotation / failure system for two units.
- Synchronized defrost system for two units.
- Voltage protector.
- Anti-corrosion treatment on condenser / evaporator coil.
- Time control.
- Humidifier external to the equipment and control (cooling).
- Anti-corrosive treatment for the condenser unit furniture.
- Monitoring and control system. See page 69.



ELECTRONIC CONTROLLER

KIDE-Split units incorporate the advanced XW60K-2DI electronic controller as standard.

- Temperature control with maximum and minimum temperature recordings.
- "Jet Cool" function for rapid cooling
- Intelligent defrost.



0 °C -5 °C ÷ 10 °C		Refrigeration capacity	°C EXT	°C EXT		Compressor		R-290	Nominal consumption	Max. load current	Flow	Noise level	Weight
Series	Model										condens. evapora.		
		W	m³	m³		HP	kW	kg	A	A	m³/h	dBA	kg
000	EMR0004M1P	635	5	4	230/1/50	1/3	0,25	<0,1	2,7	3,1	685 - 650	34	65
100	EMR1006M1P	1.050	9	7	230/1/50	1/2	0,4	<0,15	2,7	3,6	1.100 - 880	34	65
	EMR1007M1P	1.340	12	9	230/1/50	3/4	0,5	<0,15	3,5	4,7	1.100 - 880	34	65
200	EMR2010M1P	1.825	17	15	230/1/50	1 1/4	0,9	<0,15	6,5	8,0	2.000 - 1.250	34	95
	EMR2015M1P	2.300	27	23	230/1/50	1 1/2	1,1	<0,15	7,2	9,4	2.000 - 1.225	34	95
	EMR2020M1P	2.750	36	28	230/1/50	1 3/4	1,3	<0,3	9,1	11,7	2.000 - 1.225	34	95

i If the equipment is to operate in a working range between 0 and -5 °C, it will be necessary to include a drain resistor. (Consult the technical office).




-20 °C -25 °C ÷ 15 °C		Refrigeration capacity	°C EXT	°C EXT		Compressor		R-290	Nominal consumption	Max. load current	Flow	Noise level	Weight
Series	Model										condens. evapora.		
		W	m³	m³		HP	kW	kg	A	A	m³/h	dBA	kg
000	EMR0004L1P	440	3	2	230/1/50	1/2	0,4	<0,1	2,5	3,3	700 - 675	34	65
100	EMR1010L1P	660	4	3	230/1/50	3/4	0,5	<0,15	2,9	3,8	1.100 - 880	34	65
	EMR1015L1P	920	6	5	230/1/50	1 1/4	0,9	<0,15	4,4	6,0	1.100 - 880	34	65
200	EMR2015L1P	1.280	11	8	230/1/50	1 1/2	1,1	<0,15	5,7	7,2	2.000 - 1.250	34	95
	EMR2020L1P	1.400	15	10	230/1/50	1 3/4	1,3	<0,3	6,3	8,7	2.000 - 1.250	34	95
300	NEW EMR3215L1P	1.840	18	16	230/1/50	(2) 1 1/4	(2) 0,9	2x0,15	10,8	16,6	2.270 - 3.300	45	125
	NEW EMR3225L1P	2.560	34	26	230/1/50	(2) 1 1/2	(2) 1,1	2x0,15	12,4	19,3	2.270 - 3.300	45	125


DIMENSIONS

Unit			
Series	A	B	C
000	400	570	915
100	400	695	1.050
200	500	950	1.172
300	500	950	1.210

Cut	
H	L
490	405
615	405
865	405
865	405

Unit + EMB. / PACK.			
A	B	C	kg
1.136	1.000	1.350	80
1.136	1.000	1.350	80
1.136	1.000	1.350	170
1.136	1.000	1.350	170

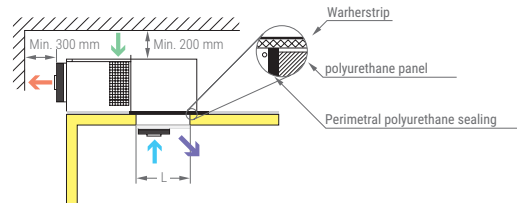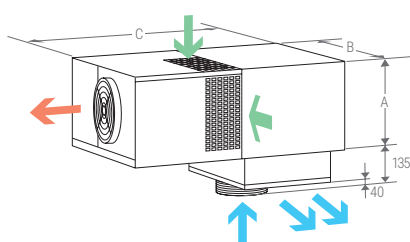



COMMERCIAL EQUIPMENT

COMPACT CEILING-MOUNTED

EMR

Compact commercial ceiling-mounted refrigeration units for small volume cold storage rooms for use in medium and low temperature applications.

R-455A
R-454C



GENERAL CHARACTERISTICS

- Pre-charged with refrigerant.
- Hermetic compressor.
- Expansion by thermostatic valve.
- High and low-pressure control.
- Automatic defrosting by hot gas.
- Automatic evaporation of defrosting water.
- Cable for supply, light and door micro switch (2,5 m).
- Remote multifunctional electronic control (5 m).
- Watertight light point with energy-saving LED bulb.
- Condensation control by pressure switch.
- Ceramic filter dryer.
- Probe alert "dirty condenser".
- Evaporator located in a totally hermetic and insulated enclosure.
- High performance optimized air flow in the evaporator.
- Install under roof.
- Watertight electrical panel.
- Air extraction fan.

OPTIONS

- Refrigerant R-454C.
- Winter Kit.
- Rotation / failure system for two units.
- Synchronized defrost system for two units.
- Voltage protector.
- Anti-corrosion treatment on condenser / evaporator coil.
- Time control.
- Humidifier external to the equipment and control (cooling).
- Anti-corrosive treatment for the condenser unit furniture.
- Monitoring and control system. See page 69.



ELECTRONIC CONTROLLER

KIDE-Split units incorporate the advanced XW60K-2DI electronic controller as standard.

- Temperature control with maximum and minimum temperature recordings.
- "Jet Cool" function for rapid cooling
- Intelligent defrost.



All compact units in the commercial range using A2L refrigerants (R-455A and R-454C) are excluded* from the scope of the Regulation on Safety for Refrigeration Installations (RSIF).

* The exclusion of these units does not mean that the entire installation is exempt from the application of this REGULATION regarding design, safety conditions, and communication with the administration.

0 °C -5 °C ÷ 10 °C		Refrigeration capacity	°C EXT	°C EXT		Compressor		R-455A	Nominal consumption	Max. load current	Flow	Noise level	Weight
Series	Model	W	m³	m³		HP	kW	kg	A	A	condens. evapora. m³/h	dBA	kg
100	EMR1006M1G	1.145	9	7	230/1/50	3/4	0,5	<1	4,8	7,0	1.100 - 1.100	34	80
	EMR1007M1G	1.475	12	9	230/1/50	1	0,7	<1	5,3	8,2	1.100 - 1.100	34	80
200	EMR2010M1G	1.750	16	14	230/1/50	1 1/4	0,9	<1,5	8,2	10,2	1.920 - 2.200	40	110
	EMR2015M5G	2.000	20	17	400/3/50	1 1/2	1,1	<1,5	3,3	4,0	1.920 - 2.200	42	115
300	EMR3017M5G	2.510	30	25	400/3/50	1 3/4	1,3	<1,8	4,1	5,2	2.270 - 3.300	43	138
	EMR3020M5G	3.100	40	32	400/3/50	2	1,5	<1,8	4,8	6,2	2.270 - 3.300	45	140

i If the equipment is to operate in a working range between 0 and -5 °C, it will be necessary to include a drain resistor. (Consult the technical office).





-20 °C -25 °C ÷ -15 °C		Refrigeration capacity	°C EXT	°C EXT		Compressor		R-455A	Nominal consumption	Max. load current	Flow	Noise level	Weight
Series	Model	W	m³	m³		HP	kW	kg	A	A	condens. evapora. m³/h	dBA	kg
100	EMR1010L1G	850	5	4	230/1/50	3/4	0,5	<1	3,3	6,4	1.100 - 1.100	34	74
	EMR1015L1G	1.100	8	5	230/1/50	1 1/4	0,9	<1	5,2	8,1	1.100 - 1.100	35	74
200	EMR2015L1G	1.350	15	10	230/1/50	1 3/4	1,3	<1,5	6,5	9,9	1.920 - 2.200	40	115
300	EMR3017L5G	1.500	21	14	400/3/50	2	1,5	<1,8	3,6	4,4	2.270 - 3.300	44	138
	EMR3020L5G	2.000	25	18	400/3/50	2 1/2	1,8	<1,8	5,2	7,2	2.270 - 3.300	45	140


DIMENSIONS

Unit			
Series	A	B	C
100	400	695	1.050
200	500	950	1.172
300	500	950	1.210

Cut	
H	L
615	405
865	405
865	405

Unit + EMB. / PACK.			
A	B	C	kg
966	640	985	95
1.136	1.000	1.350	145
1.136	1.000	1.350	170

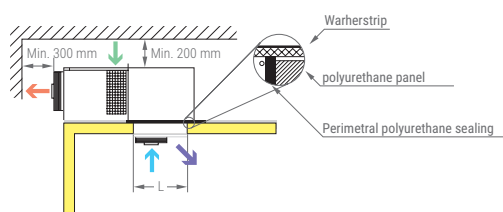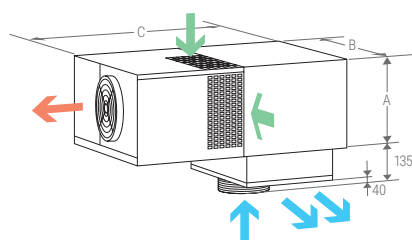



COMMERCIAL EQUIPMENT

COMPACT CEILING MOUNTED CENTRIFUGAL

EMF

Compact commercial ceiling-mounted refrigeration units for small volume cold storage rooms, with centrifugal fan, for use in medium and low temperature applications.

R-290



GENERAL CHARACTERISTICS

- Pre-charged with refrigerant.
- Hermetic compressor.
- Expansion by thermostatic valve.
- High pressure control.
- Automatic defrosting by hot gas.
- Automatic evaporation of defrosting water.
- Centrifuge fan in the condenser (Max. length 10m, min. diameter 250 mm Series 100 and 315 mm Series 200-300).
- Cable for supply, light and door micro switch (2,5 m).
- Remote multifunctional electronic control (5 m).
- Watertight light point with energy-saving LED bulb.
- Ceramic filter dryer.
- Probe alert "dirty condenser".
- Evaporator located in a totally hermetic and insulated enclosure.
- High performance optimized air flow in the evaporator.
- Indoor use.
- Air extraction fan.

OPTIONS

- Winter Kit.
- Rotation / failure system for two units.
- Synchronized defrost system for two units.
- Voltage protector.
- Anti-corrosion treatment on condenser / evaporator coil.
- Exhaust air duct.
- Time control.
- Humidifier external to the equipment and control (cooling).
- Anti-corrosive treatment for the condenser unit furniture.
- Monitoring and control system. See page 69.



ELECTRONIC CONTROLLER

KIDE-Split units incorporate the advanced XW60K-2DI electronic controller as standard.

- Temperature control with maximum and minimum temperature recordings.
- "Jet Cool" function for rapid cooling
- Intelligent defrost.



0 °C -5 °C ÷ 10 °C		Refrigeration capacity	°C EXT	°C EXT		Compressor		R-290	Nominal consumption	Max. load current	Flow	Noise level	Weight
Series	Model					HP	kW				condens. evapora.		
		W	m³	m³				kg	A	A	m³/h	dBA	kg
000	EMF0004M1P	635	5	4	230/1/50	1/3	0,25	<0,1	3,0	3,5	685 - 650	34	65
100	EMF1006M1P	1.050	9	7	230/1/50	1/2	0,4	<0,15	3,1	4,0	1.100 - 880	34	65
	EMF1007M1P	1.340	12	9	230/1/50	3/4	0,5	<0,15	3,9	5,0	1.100 - 880	34	65
200	EMF2010M1P	1.825	17	15	230/1/50	1 1/4	0,9	<0,15	7,2	8,7	2.000 - 1.250	34	95
	EMF2015M1P	2.300	27	23	230/1/50	1 1/2	1,1	<0,15	7,8	10,0	2.000 - 1.225	34	95
	EMF2020M1P	2.750	36	28	230/1/50	1 3/4	1,3	<0,3	9,7	12,3	2.000 - 1.225	34	95



If the equipment is to operate in a working range between 0 and -5 °C, it will be necessary to include a drain resistor. (Consult the technical office).




-20 °C -25 °C ÷ 15 °C		Refrigeration capacity	°C EXT	°C EXT		Compressor		R-290	Nominal consumption	Max. load current	Flow	Noise level	Weight
Series	Model					HP	kW				condens. evapora.		
		W	m³	m³				kg	A	A	m³/h	dBA	kg
000	EMF0004L1P	440	3	2	230/1/50	1/2	0,4	<0,1	2,9	3,6	700 - 675	34	65
100	EMF1010L1P	660	4	3	230/1/50	3/4	0,5	<0,15	3,3	4,2	1.100 - 880	34	65
	EMF1015L1P	920	6	5	230/1/50	1 1/4	0,9	<0,15	4,8	6,4	1.100 - 880	34	65
200	EMF2015L1P	1.280	11	8	230/1/50	1 1/2	1,1	<0,15	6,3	7,8	2.000 - 1.250	34	95
	EMF2020L1P	1.400	15	10	230/1/50	1 3/4	1,3	<0,3	7,0	9,3	2.000 - 1.250	34	95


DIMENSIONS

Unit			
Series	A	B	C
000	400	570	915
100	400	695	1.050
200	500	950	1.172

Cut	
H	L
490	405
615	405
865	405

Unit + EMB. / PACK.			
A	B	C	kg
1.136	1.000	1.350	80
1.136	1.000	1.350	80
1.136	1.000	1.350	170

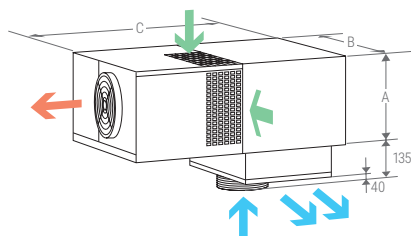



COMMERCIAL EQUIPMENT

COMPACT CEILING MOUNTED CENTRIFUGAL

EMF

Compact commercial ceiling-mounted refrigeration units for small volume cold storage rooms, with centrifugal fan, for use in medium and low temperature applications.

R-455A
R-454C



GENERAL CHARACTERISTICS

- Pre-charged with refrigerant.
- Hermetic compressor.
- Expansion by thermostatic valve.
- High and low-pressure control.
- Automatic defrosting by hot gas.
- Automatic evaporation of defrosting water.
- Cable for supply, light and door micro switch (2,5 m).
- Centrifuge fan in the condenser (Max. length 10m, min. diameter 250 mm Series 100 and 315 mm Series 200-300).
- Remote multifunctional electronic control (5 m).
- Watertight light point with energy-saving LED bulb.
- Condensation control by pressure switch.
- Ceramic filter dryer.
- Probe alert "dirty condenser".
- Evaporator located in a totally hermetic and insulated enclosure.
- High performance optimized air flow in the evaporator.
- Indoor use.
- Watertight electrical panel.
- Air extraction fan.

OPTIONS

- Refrigerant R-454C.
- Winter Kit.
- Rotation / failure system for two units.
- Synchronized defrost system for two units.
- Voltage protector.
- Anti-corrosion treatment on condenser / evaporator coil.
- Exhaust air duct.
- Time control.
- Humidifier external to the equipment and control (cooling).
- Anti-corrosive treatment for the condenser unit furniture.
- Monitoring and control system. See page 69.



ELECTRONIC CONTROLLER

KIDE-Split units incorporate the advanced XW60K-2DI electronic controller as standard.

- Temperature control with maximum and minimum temperature recordings.
- "Jet Cool" function for rapid cooling
- Intelligent defrost.



All compact units in the commercial range using A2L refrigerants (R-455A and R-454C) are excluded* from the scope of the Regulation on Safety for Refrigeration Installations (RSIF).

* The exclusion of these units does not mean that the entire installation is exempt from the application of this REGULATION regarding design, safety conditions, and communication with the administration.

0 °C -5 °C ÷ 10 °C		Refrigeration capacity	°C EXT	°C EXT		Compressor		R-455A	Nominal consumption	Max. load current	Flow condens. evapora.	Noise level	Weight
Series	Model	W	m³	m³		HP	kW	kg	A	A	m³/h	dBA	kg
100	EMF1006M1G	1.145	9	7	230/1/50	3/4	0,5	<1	5,2	7,3	1.030 - 1.100	34	102
	EMF1007M1G	1.475	12	9	230/1/50	1	0,7	<1	5,6	8,6	1.030 - 1.100	34	102
200	EMF2010M1G	1.750	16	14	230/1/50	1 1/4	0,9	<1,5	8,9	10,8	1.370 - 2.200	40	113
	EMF2015M5G	2.000	20	17	400/3/50	1 1/2	1,1	<1,5	3,9	4,6	1.370 - 2.200	40	118
300	EMF3017M5G	2.510	30	25	400/3/50	1 3/4	1,3	<1,8	4,6	5,7	1.370 - 3.300	43	140
	EMF3020M5G	3.100	40	32	400/3/50	2	1,5	<1,8	5,3	6,7	1.370 - 3.300	45	143

i If the equipment is to operate in a working range between 0 and -5 °C, it will be necessary to include a drain resistor. (Consult the technical office).




-20 °C -25 °C ÷ -15 °C		Refrigeration capacity	°C EXT	°C EXT		Compressor		R-455A	Nominal consumption	Max. load current	Flow condens. evapora.	Noise level	Weight
Series	Model	W	m³	m³		HP	kW	kg	A	A	m³/h	dBA	kg
100	EMF1010L1G	850	5	4	230/1/50	3/4	0,5	<1	3,6	6,8	1.030 - 1.100	34	99
	EMF1015L1G	1.100	8	5	230/1/50	1 1/4	0,9	<1	5,6	8,5	1.030 - 1.100	35	99
200	EMF2015L1G	1.350	15	10	230/1/50	1 3/4	1,3	<1,5	7,1	10,5	1.370 - 2.200	40	118
300	EMF3017L5G	1.500	21	14	400/3/50	2	1,5	<1,8	4,1	4,9	1.370 - 3.300	44	140
	EMF3020L5G	2.000	25	18	400/3/50	2 1/2	1,8	<1,8	5,7	7,7	1.370 - 3.300	45	143


DIMENSIONS


Unit			
Series	A	B	C
100	400	695	1.050
200	500	950	1.172
300	500	950	1.210

Cut	
H	L
615	405
865	405
865	405

Unit + EMB. / PACK.			
A	B	C	kg
966	780	1.105	115
1.136	1.000	1.350	145
1.136	1.000	1.350	170

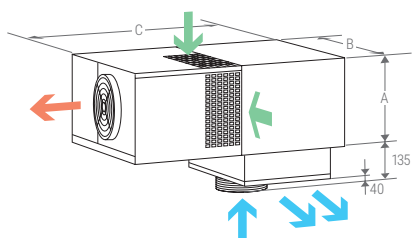

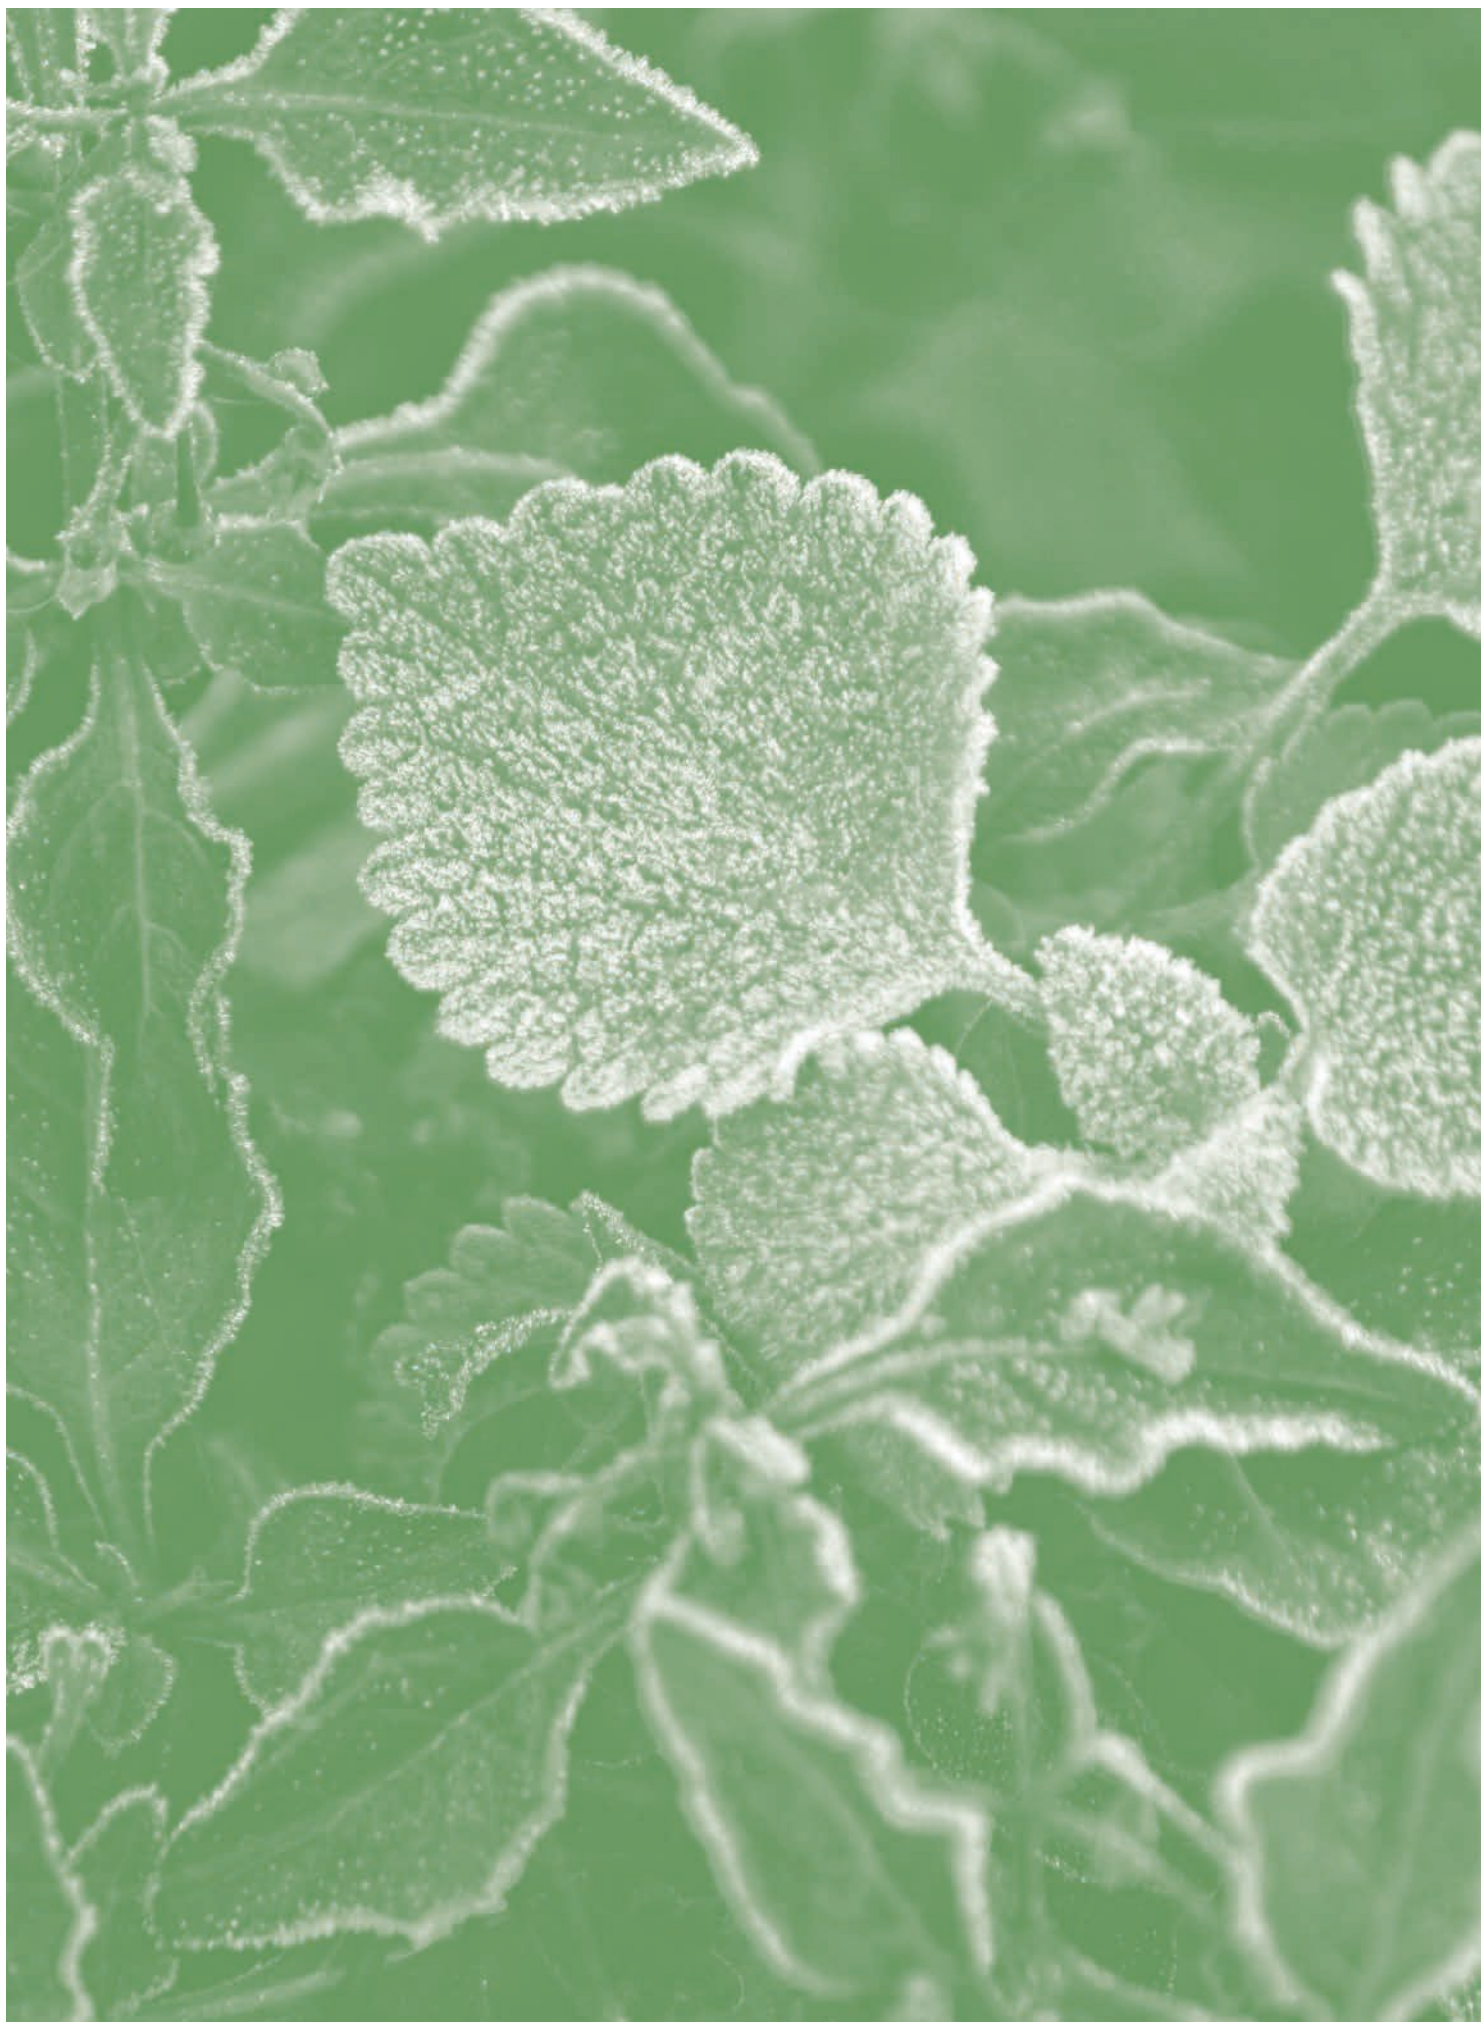

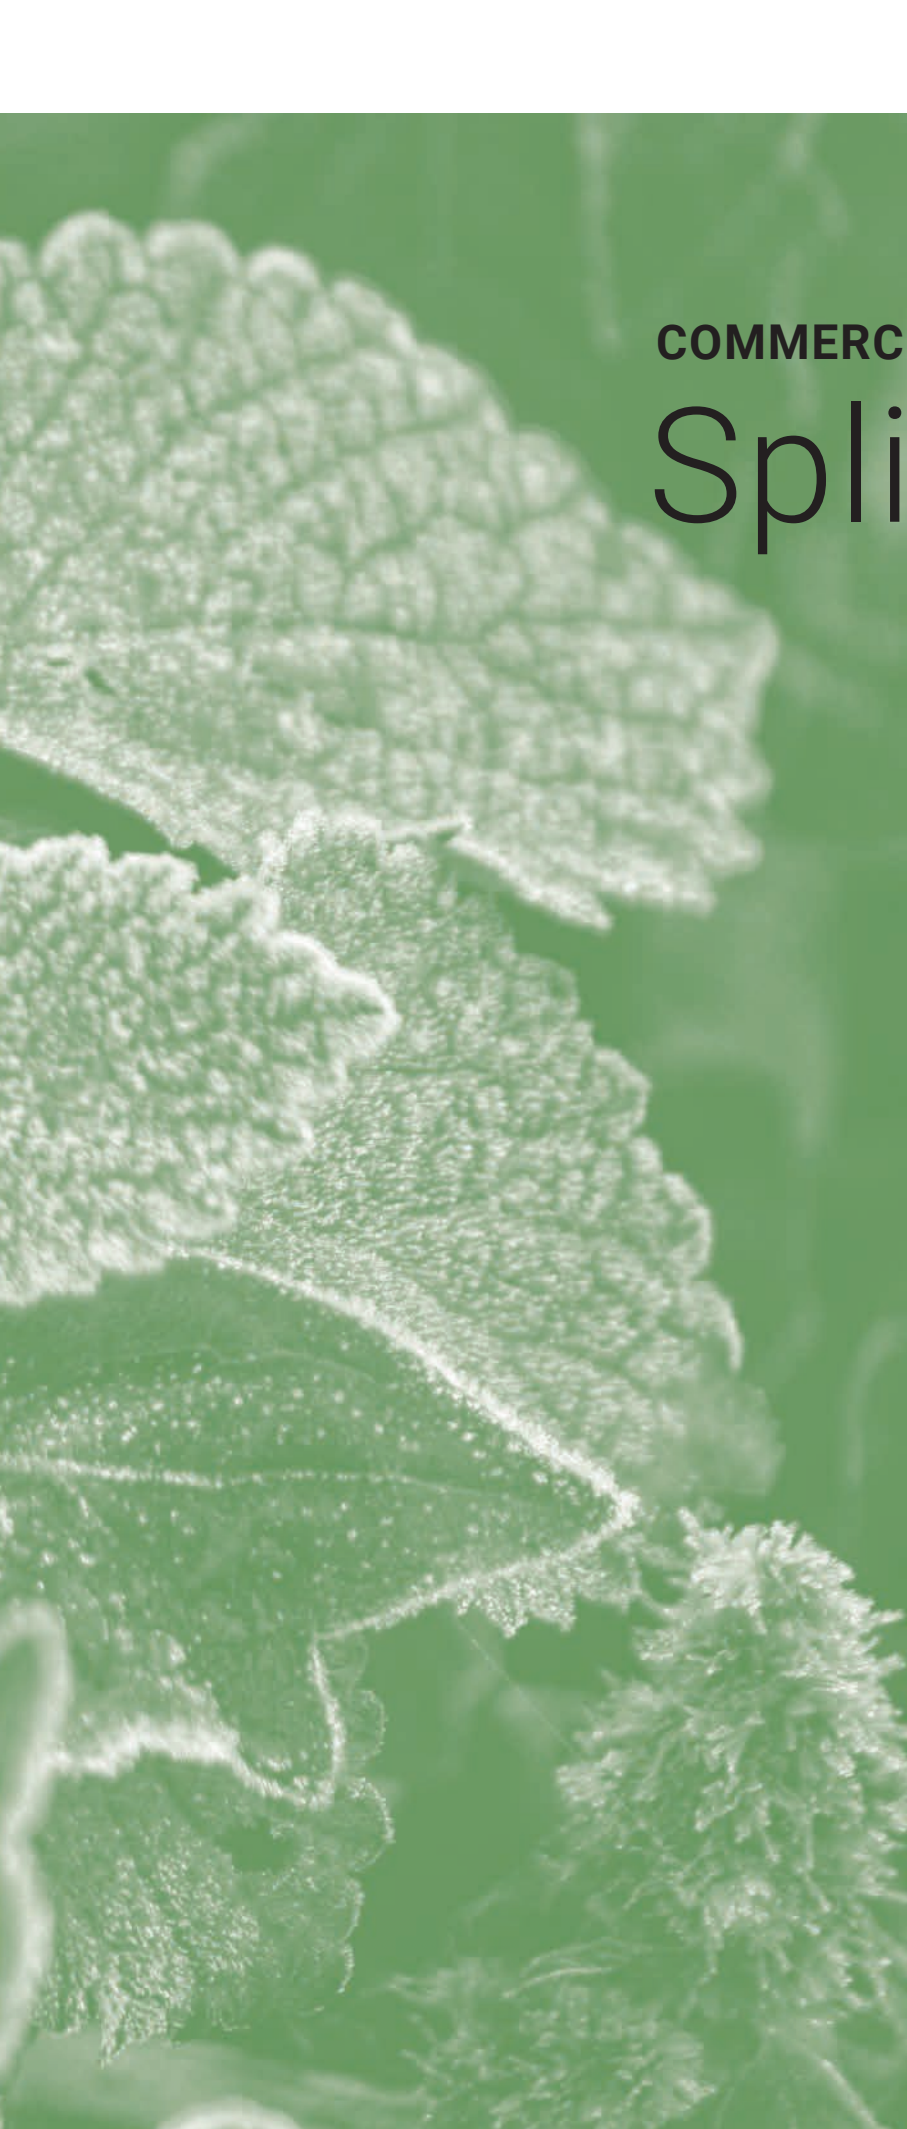

COMMERCIAL EQUIPMENT

Split

- p. 36 Split
[ESC](#) · A2L
- p. 38 Maxisplit
[USC](#) · A2L
- p. 40 Split
[ESC](#) · R-449A / R-452A
- p. 42 Maxisplit
[USC](#) · R-449A / R-452A
- p. 44 Work rooms
[ESC](#) · A2L
- p. 46 Work rooms
[USC](#) · A2L
- p. 48 Work rooms
[ESC](#) · R-449A / R-452A
- p. 50 Work rooms
[USC](#) · R-449A
- p. 52 Centrifugal split
[ESF](#) · A2L
- p. 54 Centrifugal split
[ESF](#) · R-449A / R-452A
- p. 56 Work rooms
[ESF](#) · A2L
- p. 58 Work rooms
[ESF](#) · R-449A
- p. 60 Silent split
[ESS](#) · A2L
- p. 62 Work rooms
[ESS](#) · A2L
- p. 64 Silent split
[ESS](#) · R-449A
- p. 66 Work rooms
[ESS](#) · R-449A

kide**SPLIT****-20 °C****0 °C****COMMERCIAL EQUIPMENT****SPLIT****ESC**

Commercial split refrigeration units for small volume cold storage rooms in medium and low temperature applications.

**GENERAL CHARACTERISTICS**

- Pre-charged with refrigerant (Max. length 10 m).
- Hermetic compressor.
- Service valves (Series 100 - 200 - 300).
- Safety valve (Serie 500).
- Liquid receptacle.
- Ceramic filter dryer.
- Liquid sight glass.
- High and low pressure switch.
- Condensation control by pressure switch.
- Probe alert "dirty condenser".
- Thermostatic expansion valve in the evaporator.
- Solenoid valve in the evaporator.
- Automatic defrosting by heating element.
- Draintipe heating element in low T^a (2 m).
- Ceiling type evaporator with nitrogen (Series 100 - 200 - 300).
- Cubic evaporator with nitrogen (Series 400 - 500).
- Electrical supply cable (3 m) (Series 100 - 200 - 300).
- Evaporator interconnecting cables (2) (10 m) (Series 100 - 200 - 300).
- Remote multifunctional electronic control (5 m) (Series 100 - 200 - 300).
- Cable for light (3 m) (Series 100-200-300).
- Watertight electrical panel.
- Air extraction fan.
- Liquid injection in 400-500 series.

OPTIONS

- Refrigerant R-454C.
- Winter Kit.
- Rotation / failure system for two units.
- Synchronized defrost system for two units.
- Voltage protector.
- Anti-corrosion treatment on condenser / evaporator coil.
- Independent electrical panel. (100-200-300 series). See page 167.
- Time control.
- Cubic evaporator (100-200-300 series).
- Humidifier external to the equipment and control (cooling).
- Oil separator (400-500 series).
- Anti-corrosive treatment for the condenser unit furniture.
- Monitoring and control system. See page 69.

Xwzb**ELECTRONIC CONTROLLER**

KIDE-Split units incorporate the advanced XW60K-2DI electronic controller as standard.

- Temperature control with maximum and minimum temperature recordings.
- "Jet Cool" function for rapid cooling
- Intelligent defrost.



CALCULATION BASIS - Pag. 168

0 °C -5 °C ÷ 10 °C		Refrigeration capacity	°C EXT	°C EXT		Compressor		Model UC.	Liq	Suct	R-455A	Nominal consumption	Max. load current	Evap. model	Flow	Noise level	Weight
Series	Model	W	m³	m³		HP	kW				kg	A	A		condens. evapora.		
100	ESC1006M1G	1.145	9	7	230/1/50	3/4	0,5	ECC1006M1G	3/8	1/2	<2	5,0	7,2	EEC3001M1G	1.100 - 1.000	32	70
	ESC1007M1G	1.475	12	9	230/1/50	1	0,7	ECC1007M1G	3/8	1/2	<2	6,1	8,9	EEC3001M1G	1.100 - 1.000	32	70
200	ESC2010M1G	1.750	16	14	230/1/50	1 1/4	0,9	ECC2010M1G	3/8	5/8	<3	8,7	10,6	EEC3022M1G	1.920 - 2.000	42	85
300	ESC3017M5G	2.510	30	25	400/3/50	1 1/2	1,1	ECC3017M5G	3/8	3/4	<3,5	4,7	5,8	EEC3003M1G	1.920 - 3.000	45	110
	ESC3020M5G	3.100	40	32	400/3/50	2	1,5	ECC3020M5G	3/8	3/4	<4	5,4	6,8	EEC3003M1G	1.920 - 3.000	45	110
400	ESC4025M5G	4.300	65	50	400/3/50	2 1/2	1,8	ECC4025M5G	1/2	3/4	<5,5	5,8	8,9	EEC2206M1G	4.540 - 3.200	45	150
	ESC4030M5G	5.020	86	67	400/3/50	3	2,2	ECC4030M5G	1/2	3/4	5,2	6,8	9,0	EEC2206M1G	2.900 - 3.200	45	170
	ESC4035M5G	6.010	106	85	400/3/50	3 1/2	2,6	ECC4035M5G	1/2	3/4	5,5	7,2	11,1	EEC2236M1G	2.900 - 5.490	45	170
500	ESC5040M5G	7.150	130	100	400/3/50	4	3	ECC5040M5G	1/2	7/8	8	7,7	12,4	EEC2316M1G	3.270 - 5.600	45	200

i If the equipment is to operate in a working range between 0 and -5 °C, it will be necessary to include a drain resistor. (Consult the technical office).

-20 °C -25 °C ÷ -15 °C		Refrigeration capacity	°C EXT	°C EXT		Compressor		Model UC.	Liq	Suct	R-455A	Nominal consumption	Max. load current	Evap. model	Flow	Noise level	Weight
Series	Model	W	m³	m³		HP	kW				kg	A	A		condens. evapora.		
100	ESC1010L1G	850	5	4	230/1/50	3/4	0,5	ECC1010L1G	3/8	5/8	<1	5,0	7,2	EEC3001L1G	1.100 - 1.300	32	69
	ESC1015L1G	1.100	8	5	230/1/50	1 1/4	0,9	ECC1015L1G	3/8	5/8	<1	5,9	8,8	EEC3001L1G	1.100 - 1.300	32	65
200	ESC2015L1G	1.350	15	10	230/1/50	1 3/4	1,3	ECC2015L1G	3/8	5/8	<1,5	7,5	10,9	EEC3002L1G	1.920 - 3.000	40	91
300	ESC3017L5G	1.500	21	14	400/3/50	2	1,5	ECC3017L5G	3/8	3/4	<2	4,7	5,5	EEC3003L1G	1.920 - 4.000	45	120
	ESC3020L5G	2.000	25	18	400/3/50	2 1/2	1,8	ECC3020L5G	3/8	3/4	<2	6,4	8,3	EEC3003L1G	1.920 - 4.000	45	120
400	ESC4030L5G	2.840	36	28	400/3/50	3	2,2	EEC2156L1G	1/2	3/4	<8	6,9	12	EEC2156L1G	4.540 - 3.670	45	150
	ESC4040L5G	3.605	52	40	400/3/50	4	3	EEC2206L1G	1/2	3/4	<8	9	14,2	EEC2206L1G	4.540 - 3.200	45	155
500	ESC5050L5G	4.325	76	56	400/3/50	5	3,7	EEC2236L1G	1/2	7/8	<8	10,2	17,1	EEC2236L1G	4.540 - 5.490	45	170
	ESC5060L5G	5.300	111	77	400/3/50	6	4,7	EEC2316L1G	1/2	1 1/8	<9	11,9	20,9	EEC2316L1G	4.540 - 5.600	45	200




i Calculation made for 10 m equivalent length.

In the "SPLIT" units KIDE advises to install the drain pipe with syphon out of the coldroom. For freezer rooms the piping should be metallic.

DIMENSIONS

Series	COND.						EVAP.				
	A	B	C	D1	D2	Model	A	B	C	D1	D2
100	370	460	760	610	276	1L	210	425	920	670	460
						1M	250	500	820	570	440
200	450	575	950	800	373	2L	250	500	1.310	1.050	460
						2M	250	500	1.200	950	460
300	500	575	940	800	373	3L	280	500	1.890	1.620	460
						3M	280	500	1.690	1.420	460
						L403	440	450	1.145	925	410
400	665	670	1.030	455	570	L404	440	450	1.145	925	410
						M425-30	440	450	1.145	925	410
						M435	440	450	1.595	1.375	410
500	915	750	1.050	480	630	L505	440	450	1.595	1.375	410
						L506	565	490	1.565	1.345	450
						M5	565	490	1.565	1.345	450

Series	U.C + EMB./PACK.				kg	EVAP+EMB./PACK.				kg
	A	B	C			Model	A	B	C	
100	867	640	985	60		1L	300	530	1.015	25
						1M	300	530	1.015	20
200	867	640	985	75		2L	300	530	1.395	35
						2M	300	530	1.395	30
300	750-867	640	985	90		3L	330	535	1.980	50
						3M	330	535	1.980	45
						L403	530	530	1.180	35
400	1.126	740	1.070	130		L404	530	530	1.180	40
						M425-30	530	530	1.180	40
						M435	530	530	1.630	50
500	1.136	1.000	1.350	180		L505	530	530	1.630	50
						L507	655	570	1.600	55
						M5	655	570	1.600	55



COMMERCIAL EQUIPMENT

MAXISPLIT

USC

Maxi-split refrigeration units for medium volume cold storage rooms in medium and low temperature applications.


R-455A
R-454C


GENERAL CHARACTERISTICS

- Pre-charged with nitrogen.
- Reciprocating hermetic or semi-hermetic compressor depending on the model.
- Expansion by thermostatic valve.
- Liquid receiver with safety valve.
- Ceramic filter dryer.
- Solenoid valve in the evaporator.
- Liquid sight glass.
- High and low pressure switch.
- Automatic defrosting by heating element.
- Drantype heating element in low T^a (2 m).
- Remote multifunctional electronic control.
- Cubic evaporator.
- Condensation control by pressure switch.
- Probe alert "dirty condenser".
- Voltage protector.
- Magnetothermic protection.
- Maneuver for air extraction in case of refrigerant in the environment.
- Watertight electrical panel.

OPTIONS

- Refrigerant R-454C.
- Refrigerant charged.
- Winter Kit.
- Rotation / failure system for two units.
- Synchronized defrost system for two units.
- Anti-corrosion treatment on condenser / evaporator coil.
- Time control.
- Semi-hermetic compressor for models with a hermetic compressor.
- Humidifier external to the equipment and control (cooling).
- Oil separator.
- Special wooden packaging for container shipment.
- Monitoring and control system. See page 69.



ELECTRONIC CONTROLLER

KIDE-Split units incorporate the advanced XW60K-2DI electronic controller as standard.

- Temperature control with maximum and minimum temperature recordings.
- "Jet Cool" function for rapid cooling
- Intelligent defrost.






0 °C -5 °C ÷ 10 °C		Refrigeration capacity	 °C EXT	 °C EXT		Compressor		Model UC.	Liq	Suct	R-455A	Nominal consumption	Max. load current	Evap. model	Flow condens. evapora.	Noise level	Weight
Series	Model	W	m³	m³		HP	kW					A	A		m³/h	dBA	kg
600	USC6040M5G	7.150	130	100	400/3/50	4	3	UCC6040M5G	1/2	7/8	NITROGEN	9,6	11,4	EEC2316M1G	6.300 - 5.600	49	235
	USC6050M5G	8.010	170	140	400/3/50	5	3,7	UCC6050M5G	1/2	7/8		9,1	11,7	UEC2316M1G	5.200 - 5.600	50	245
700	USC7065M5G	10.740	210	185	400/3/50	6 1/2	4,8	UCC7065M5G	5/8	1 1/8		15,4	18,0	UEC2416M5G	11.160 - 8.540	51	300
	USC7070M5G	12.370	290	230	400/3/50	7	5,2	UCC7070M5G	5/8	1 3/8		14,8	18,0	UEC2416M5G	7.500 - 5.360	52	340
800	USC8100M5G	16.960	380	315	400/3/50	10	7,5	UCC8100M5G	5/8	1 3/8		23,4	26,5	UEC2924M5G	9.600 - 11.500	53	400
	USC8130M5G	20.800	480	400	400/3/50	13	9,7	UCC8130M5G	5/8	1 3/8		26,8	33,6	UEC2924M5G	9.600 - 11.500	53	410
	USC8150M5G	25.900	590	530	400/3/50	15	11,2	UCC8150M5G	5/8	1 5/8		30,3	36,1	UEC3232M5G	13.500 - 10.400	58	460
	USC8220M5G	30.900	800	620	400/3/50	22	16,4	UCC8220M5G	5/8	1 5/8		31,7	37,8	UEC3434M5G	13.500 - 15.000	60	625

-20 °C -25 °C ÷ -15 °C		Refrigeration capacity	 °C EXT	 °C EXT		Compressor		Model UC.	Liq	Suct	R-455A	Nominal consumption	Max. load current	Evap. model	Flow	Noise level	Weight
Series	Model	W	m³	m³		HP	kW					A	A		condens. evapora.		
															m³/h	dBA	kg
600	USC6060L5G	5.300	111	77	400/3/50	6	4,7	UCC6060L5G	3/8	7/8	NITROGEN	7	12,7	EEC2316L1G	5.200 - 5.600	49	240
	USC6075L5G	6.800	130	105	400/3/50	7 1/2	6,2	UCC6075L5G	3/8	1 1/8		<11	16,8	EEC2316L1G	5.200 - 5.600	51	255
700	USC7130L5G	10.200	340	200	400/3/50	13	6,4	UCC7130L5G	1/2	1 3/8		13	19,2	UEC2416L5G	5.600 - 5.400	52	340
800	USC8150L5G	15.450	420	340	400/3/50	15	9	UCC8150L5G	1/2	1 5/8		17	24,9	UEC3037L5G	9.600 - 11.300	53	620
	USC8200L5G	17.400	510	420	400/3/50	20	11,95	UCC8200L5G	1/2	1 5/8		18	28,1	UEC3037L5G	13.500 - 11.300	55	640
	USC8250L5G	21.100	620	510	400/3/50	25	15,15	UCC8250L5G	5/8	2 1/8		18	35,1	UEC3434L5G	13.500 - 15.000	55	640

DIMENSIONS

COND.					EVAP.				
Series	A	B	C	Model	D	E	F	G1	G2
600	770	1.180	590	EEC2316	565	1.565	400	1.345	450
				UEC2316					
700	815	1.570	650	UEC2416	565	1.565	400	1.345	450
800	945	2.050	790	UEC2924	675	1.965	450	1.625	490
				UEC3037	675	1.965	450	1.625	490
				UEC3232	675	1.965	450	1.625	490
				UEC3434	1.115	1.870	790	1.360	606

U.C + EMB./PACK.					EVAP.+EMB./PACK,				
Series	A	B	C	kg	Model	A	B	C	kg
600	1.138	1.000	1.350	200	EEC2316	670	580	2.250	55
					UEC2316				
700	1.120	1.140	2.200	250	UEC2416	670	580	2.250	80
800	1.120	1.140	2.200	330	UEC2924	1.010	645	2.020	150
					UEC3037	1.010	645	2.020	210
					UEC3232	1.010	645	2.020	210
					UEC3434	1.150	1.015	2.000	210

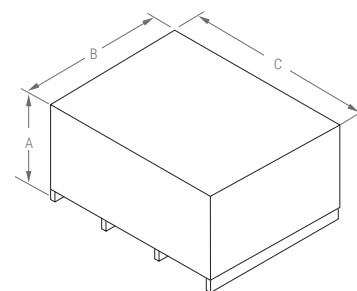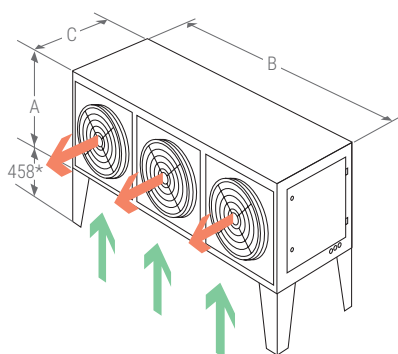

Transport legs: 100 mm high

kide**SPLIT****-20 °C****0 °C****COMMERCIAL EQUIPMENT****SPLIT****ESC**

Commercial split refrigeration units for small volume cold storage rooms in medium and low temperature applications.

**GENERAL CHARACTERISTICS**

- Pre-charged with refrigerant (Max. length 10 m).
- Hermetic compressor.
- Service valves (Series 100 - 200 - 300).
- Safety valve (Serie 500).
- Liquid receptacle.
- Ceramic filter dryer.
- Liquid sight glass.
- High and low pressure switch.
- Condensation control by pressure switch.
- Probe alert "dirty condenser".
- Thermostatic expansion valve in the evaporator.
- Solenoid valve in the evaporator.
- Automatic defrosting by heating element.
- Draintipe heating element in low T^a (2 m).
- Ceiling type evaporator with nitrogen (Series 100 - 200 - 300).
- Cubic evaporator with nitrogen (Series 400 - 500).
- Electrical supply cable (3 m) (Series 100 - 200 - 300).
- Electrical interconnection (2) evaporator (10 m) (Series 100 - 200 - 300).
- Remote multifunctional electronic control (5 m) (Series 100 - 200 - 300).
- Cable for light (3 m) (Series 100-200-300).
- Liquid injection in 400-500 series.

OPTIONS

- Winter Kit.
- Rotation / failure system for two units.
- Synchronized defrost system for two units.
- Voltage protector.
- Anti-corrosion treatment on condenser / evaporator coil.
- Independent electrical panel. (100-200-300 series). See page 167.
- Cubic evaporator (100-200-300 series).
- Other voltages and 60 Hz.
- Humidifier external to the equipment and control (cooling).
- Oil separator (400-500 series).
- Anti-corrosive treatment for the condenser unit furniture.
- Monitoring and control system. See page 69.

Xwzb**ELECTRONIC CONTROLLER**

KIDE-Split units incorporate the advanced XW60K-2DI electronic controller as standard.

- Temperature control with maximum and minimum temperature recordings.
- "Jet Cool" function for rapid cooling
- Intelligent defrost.



CALCULATION BASIS - Pag. 168

0 °C -5 °C ÷ 10 °C		Refrigera- tion capacity	 °C EXT	 °C EXT		Compressor		Model UC.		Liq	Suct	R-449A	Nominal consump- tion	Max. load current	Model evap.	Flow	Noise level	Weight
Series	Model	W	m³	m³		HP	kW					kg	A	A		m³/h	dBA	
100	ESC1005M1X	850	6	5	230/1/50	1/2	0,4	ECC1005M1X	3/8	1/2	<2	2,7	3,4	EEC3000M1X	1.100 - 440	32	48	
	ESC1006M1X	1.157	9	7	230/1/50	1/2	0,4	ECC1006M1X	3/8	1/2	<2	3,9	5,3	EEC3001M1X	1.100 - 1.000	32	60	
	ESC1007M1X	1.340	12	9	230/1/50	3/4	0,5	ECC1007M1X	3/8	1/2	<2	4,3	5,7	EEC3001M1X	1.100 - 1.000	32	60	
200	ESC2008M1X	1.650	16	14	230/1/50	1	0,7	ECC2008M1X	3/8	5/8	<3	6,0	7,4	EEC3022M1X	1.920 - 2.000	42	80	
	ESC2010M1X	1.975	20	17	230/1/50	1 1/4	0,9	ECC2010M1X	3/8	5/8	<3	7,6	9,7	EEC3022M1X	1.920 - 2.000	42	85	
	ESC2015M1X ⁽¹⁾	2.400	29	25	230/1/50	1 1/2	1,1	ECC2015M1X	3/8	5/8	<3	8,9	10,7	EEC3002M1X	1.920 - 2.000	42	105	
300	ESC3017M5X	2.899	37	30	400/3/50	1 3/4	1,3	ECC3017M5X	3/8	3/4	<3.5	4,7	5,8	EEC3003M1X	1.920 - 3.000	45	110	
	ESC3020M5X	3.579	45	37	400/3/50	2	1,5	ECC3020M5X	3/8	3/4	<4	5,4	6,8	EEC3003M1X	1.920 - 3.000	45	110	
400	ESC4025M5X	4.250	65	50	400/3/50	2 1/4	1,7	ECC4025M5X	1/2	3/4	<5.5	5,8	8,9	EEC2206M1X	4.540 - 3.200	45	150	
	ESC4030M5X	4.950	86	67	400/3/50	3	2,2	ECC4030M5X	1/2	3/4	<5.5	6,8	9,0	EEC2206M1X	4.540 - 3.200	45	150	
	ESC4035M5X	6.150	109	88	400/3/50	3 1/2	2,6	ECC4035M5X	1/2	3/4	<7	7,2	11,1	EEC2236M1X	4.540 - 5.490	45	150	
500	ESC5040M5X	7.400	135	105	400/3/50	4	3	ECC5040M5X	1/2	7/8	<8	7,7	12,4	EEC2316M1X	4.540 - 5.600	45	180	

i If the equipment is to operate in a working range between 0 and -5 °C, it will be necessary to include a drain resistor. (Consult the technical office).

(1) Equipment available in three-phase.

-20 °C -25 °C ÷ -15 °C		Refrigera- tion capacity	 °C EXT	 °C EXT		Compressor		Model UC.	Liq	Suct	R-449A	Nominal consump- tion	Max. load current	Evap. model	Flow	Noise level	Weight
Series	Model	W	m³	m³		HP	kW				kg				A		
100	ESC1005L1X*	650	4	3	230/1/50	3/4	0,5	ECC1005L1X	3/8	5/8	<2	2,8	4,2	EEC3000L1X	1.100 - 440	32	60
	ESC1007L1X*	800	5	4	230/1/50	1	0,7	ECC1007L1X	3/8	5/8	<2	3,9	5,4	EEC3001L1X	1.100 - 1.300	32	60
	ESC1010L1X*	950	6	5	230/1/50	1	0,7	ECC1010L1X	3/8	5/8	<2	4,7	6,3	EEC3001L1X	1.100 - 1.300	32	65
	ESC1015L1X*	1.200	9	6	230/1/50	1 1/2	1,1	ECC1015L1X	3/8	5/8	<2	6,2	8,8	EEC3001L1X	1.100 - 1.300	32	65
200	ESC2015L1X*	1.280	11	8	230/1/50	1 1/2	1,1	ECC2015L1X	3/8	5/8	<2,5	6,7	9,6	EEC3002L1X	1.920 - 3.000	40	85
	ESC2017L5T**	1.341	15	10	400/3/50	1 3/4	1,3	ECC2017L5T	3/8	5/8	<2,5	4,2	5,0	EEC3002L1T	1.920 - 3.000	42	90
300	ESC3017L5T**	1.620	22	15	400/3/50	2	1,5	ECC3017L5T	3/8	3/4	<3,5	4,7	5,5	EEC3003L1T	1.920 - 4.000	45	120
	ESC3020L5T**	2.218	27	19	400/3/50	2 1/2	1,8	ECC3020L5T	3/8	3/4	<3,5	6,3	8,3	EEC3003L1T	1.920 - 4.000	45	120
400	ESC4030L5X*	2.775	35	28	400/3/50	3	2,2	ECC4030L5X	1/2	3/4	<8	6,9	12	EEC2156L1X	4.540 - 3.670	45	150
	ESC4040L5X	3.425	52	40	400/3/50	4	3	ECC4040L5X	1/2	3/4	<8	9	14,2	EEC2206L1X	4.540 - 3.200	45	155
500	ESC5050L5X	4.325	76	56	400/3/50	5	3,7	ECC5050L5X	1/2	7/8	<8	10,2	17,1	EEC2236L1X	4.540 - 5.490	45	170
	ESC5060L5X	5.300	111	77	400/3/50	6	4,5	ECC5060L5X	1/2	1 1/8	<9	11,9	20,9	EEC2316L1X	4.540-5.600	45	200

***** Available in R-452A

****** Equipment with R-452A




i Calculation made for 10 m equivalent lenght.

In the "SPLIT" units KIDE advises to install the drain pipe with syphon out of the coldroom. For freezer rooms the piping should be metallic.

DIMENSIONS

	COND.						EVAP				
Series	A	B	C	D1	D2	Model	A	B	C	D1	D2
100	370	460	760	610	276	0L-0M	480	195	520	348	230
						1L	210	425	920	670	460
						1M	250	500	820	570	440
200	450	575	950	800	373	2L	250	500	1.310	1.050	460
						2M	250	500	1.200	950	460
300	500	575	940	800	373	3L	280	500	1.890	1.620	460
						3M	280	500	1.690	1.420	460
400	665	670	1.030	455	570	L403	440	450	1.145	925	410
						L404	440	450	1.145	925	410
						M425-30	440	450	1.145	925	410
						M435	440	450	1.595	1.375	410
500	915	750	1.050	480	630	L505	440	450	1.595	1.375	410
						L507	565	490	1.565	1.345	450
						M5	565	490	1.565	1.345	450

	U.C + EMB./PACK.					EVAP+EMB./PACK.			
Series	A	B	C	kg	Model	A	B	C	kg
100	867	640	985	60	0L-0M	300	530	1.015	25
					1L	300	530	1.015	25
					1M	300	530	1.015	20
200	867	640	985	75	2L	300	530	1.395	35
					2M	300	530	1.395	30
300	867	640	985	90	3L	330	535	1.980	50
					3M	330	535	1.980	45
400	1.126	740	1.070	130	L403	530	530	1.180	35
					L404	530	530	1.180	40
					M425-30	530	530	1.180	40
					M435	530	530	1.630	50
500	1.136	1.000	1.350	180	L505	530	530	1.630	50
				L507	655	570	1.600	55	
				210	M5	655	570	1.600	55



kide MAXISPLIT

-20 °C 0 °C

COMMERCIAL EQUIPMENT

MAXISPLIT

USC

Maxi-split refrigeration units for medium volume cold storage rooms in medium and low temperature applications.



GENERAL CHARACTERISTICS

- Pre-charged with nitrogen.
- Reciprocating hermetic or semi-hermetic compressor depending on the model.
- Expansion by thermostatic valve.
- Liquid receiver with safety valve.
- Ceramic filter dryer.
- Solenoid valve in the evaporator.
- Liquid sight glass.
- High and low pressure switch.
- Automatic defrosting by heating element.
- Draintype heating element in low T^a (2 m).
- Remote multifunctional electronic control.
- Cubic evaporator.
- Condensation control by pressure switch.
- Probe alert "dirty condenser".
- Voltage protector.
- Magnetothermic protection.

OPTIONS

- Refrigerant charged.
- Winter Kit.
- Rotation / failure system for two units.
- Synchronized defrost system for two units.
- Anti-corrosion treatment on condenser / evaporator coil.
- Time control.
- Semi-hermetic compressor for models with a hermetic compressor.
- Other voltages and 60 Hz.
- Humidifier external to the equipment and control (cooling).
- Oil separator.
- Special wooden packaging for container shipment.
- Monitoring and control system. See page 69.

Xwzb

ELECTRONIC CONTROLLER

KIDE-Split units incorporate the advanced XW60K-2DI electronic controller as standard.

- Temperature control with maximum and minimum temperature recordings.
- "Jet Cool" function for rapid cooling
- Intelligent defrost.



0 °C -5 °C ÷ 10 °C		Refrigeration capacity	°C EXT	°C EXT		Compressor		Model UC.	Liq	Suct	R-449A	Nominal consumption	Max. load current	Evap. model	Flow	Noise level	Weight
Series	Model	W	m³	m³		HP	kW					A	A		condens. evapora.		
															m³/h	dBA	kg
600	USC6040M5X	7.400	135	105	400/3/50	4	3	UCC6040M5X	1/2	7/8	NITROGEN	8,9	10,9	UEC2316M1X	3.500 - 5.600	49	235
	USC6050M5X	8.010	170	140	400/3/50	5	3,7	UCC6050M5X	1/2	7/8		9,1	11,7	UEC2316M1X	5.200 - 5.600	50	245
700	USC7065M5X	10.740	210	185	400/3/50	6 1/2	4,8	UCC7065M5X	5/8	1 3/8		14,6	17,5	UEC2416M5X	5.600 - 5.360	51	300
	USC7070M5X	12.370	290	230	400/3/50	7	5,2	UCC7070M5X	5/8	1 3/8		14,8	18,0	UEC2416M5X	7.500 - 5.360	52	340
800	USC8100M5X	16.960	380	315	400/3/50	10	7,5	UCC8100M5X	5/8	1 3/8		24,6	28,2	UEC2924M5X	9.600 - 11.500	53	420
	USC8130M5X	20.800	480	400	400/3/50	13	9,7	UCC8130M5X	5/8	1 3/8		26,8	33,6	UEC2924M5X	9.600 - 11.500	53	410
	USC8150M5X	25.900	590	530	400/3/50	15	11,2	UCC8150M5X	5/8	1 5/8		30,3	36,1	UEC3232M5X	13.500 - 10.400	58	460
	USC8220M5X	30.900	800	620	400/3/50	22	16,4	UCC8220M5X	5/8	1 5/8		31,7	37,8	UEC3434M5X	13.500 - 15.000	60	625




-20 °C -25 °C ÷ -15 °C		Refrigeration capacity	°C EXT	°C EXT		Compressor		Model UC.	Liq	Suct	R-449A	Nominal consumption	Max. load current	Evap. model	Flow	Noise level	Weight
Series	Model	W	m³	m³		HP	kW					A	A		condens. evapora.		
															m³/h	dBA	kg
600	USC6060L5X	5.300	111	77	400/3/50	6	4,7	UCC6060L5X	3/8	7/8	NITROGEN	12,7	19,1	UEC2316L1X	5.200 - 5.600	49	240
	USC6075L5X*	6.800	130	105	400/3/50	7 1/2	6,2	UCC6075L5X	3/8	1 1/8		16,8	23,9	UEC2316L1X	5.200 - 5.600	49	255
700	USC7100L5X*	7.900	200	150	400/3/50	10	7,4	UCC7100L5X	3/8	1 1/8		16,9	25,5	UEC2416L5X	5.600 - 5.400	51	320
	USC7130L5X	10.200	340	200	400/3/50	13	6,4	UCC7130L5X	1/2	1 3/8		19,2	34,3	UEC2416L5X	5.600 - 5.400	52	340
800	USC8150L5X	15.450	420	340	400/3/50	15	9	UCC8150L5X	1/2	1 5/8		24,9	40,6	UEC3037L5X	9.600 - 11.300	53	620
	USC8200L5X	17.400	510	420	400/3/50	20	11,9	UCC8200L5X	1/2	1 5/8		28,1	44,9	UEC3037L5X	13.500 - 11.300	55	640
	USC8250L5X	21.100	620	510	400/3/50	25	15,2	UCC8250L5X	5/8	2 1/8		35,1	56,3	UEC3434L5X	13.500 - 15.000	55	640

* Available in R-452A

DIMENSIONS

COND.					EVAP.				
Series	A	B	C	Model	D	E	F	G1	G2
600	770	1.180	590	UEC2316	565	1.565	400	1.345	450
700	815	1.570	650	UEC2416	565	1.565	400	1.345	450
800	945	2.050	790	UEC2924	675	1.965	450	1.625	490
				UEC3037	675	1.965	450	1.625	490
				UEC3232	675	1.965	450	1.625	490
				UEC3434	1.115	1.870	790	1.360	606

U.C + EMB./PACK.					EVAP.+EMB./PACK.				
Series	A	B	C	kg	Model	A	B	C	kg
600	1.138	1.000	1.350	200	UEC2316	670	580	2.250	55
700	1.120	1.140	2.200	250	UEC2416	670	580	2.250	80
800	1.120	1.140	2.200	330	UEC2924	1.010	645	2.020	150
					UEC3037	1.010	645	2.020	210
					UEC3232	1.010	645	2.020	210
					UEC3434	1.150	1.015	2.000	210

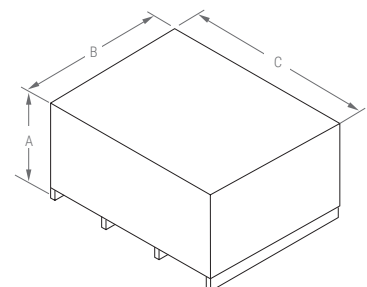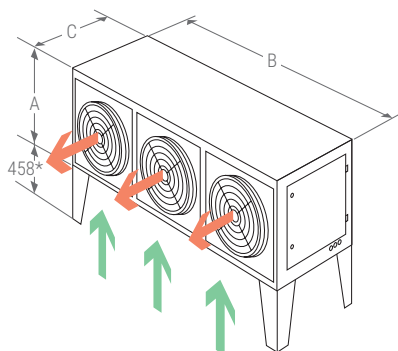

Transport legs: 100 mm high



COMMERCIAL EQUIPMENT

WORK ROOMS



Split refrigeration units specially designed for food handling and processing rooms, antechambers and loading areas, for use in high temperature applications.



GENERAL CHARACTERISTICS

- Pre-charged with refrigerant (Max. length 10 m).
- Hermetic compressor / scroll.
- Service valves (Series 100 - 200 - 300).
- Liquid receptacle.
- Ceramic filter dryer.
- Liquid sight glass.
- High and low pressure switch.
- Condensation control by pressure switch.
- Probe alert "dirty condenser".
- Thermostatic expansion valve in the evaporator.
- Solenoid valve in the evaporator.
- Automatic air defrosting.
- Double flow type evaporator with nitrogen with low air flow.
- Electrical supply cable (3 m) (Series 100 - 200 - 300).
- Electrical interconnection (3) evaporator (10 m) (Series 100 - 200 - 300).
- Remote multifunctional electronic control (5 m) (Series 100 - 200 - 300).
- Cable for light (3 m) (Series 100-200-300).
- Voltage protector in three-phase version.
- Air extraction fan.
- Watertight electrical panel.

OPTIONS

- Winter Kit.
- Rotation / failure system for two units.
- Synchronized defrost system for two units.
- Voltage protector (single-phase version).
- Anti-corrosion treatment on condenser / evaporator coil.
- Oil separator (400-500 series).
- Independent electrical panel. See page 167.
- Evaporator condensate pump (max. Pumping head 1,5 m).
- Humidifier external to the equipment and control.
- Time control.
- Anti-corrosive treatment for the condenser unit furniture.
- Monitoring and control system. See page 69.



ELECTRONIC CONTROLLER

KIDE-Split units incorporate the advanced XW60K-2DI electronic controller as standard.

- Temperature control with maximum and minimum temperature recordings.
- "Jet Cool" function for rapid cooling
- Intelligent defrost.






CALCULATION BASIS - Pag. 168

12 °C +10°C ÷ 15 °C		Refrige- ration capacity	°C EXT	°C EXT		Compressor		Model UC.	Liq	Suct	R-455A	Nominal consump- tion	Max. load current	Evap. model	Flow condens. evapora.	Noise level	Weight
Series	Model	W	m³	m³		HP	kW				kg	A	A		m³/h	dBA	kg
200	ESC2007H1G	2.130	27	20	230/1/50	3/4	0,5	ECC2007H1G	3/8	1/2	2,4	5,1	7,3	EEP4084W1G	1.040 - 1.590	25	100
300	ESC3008H1G	2.810	41	30	230/1/50	1	0,7	ECC3008H1G	3/8	1/2	3	6,2	9	EEP4094W1G	1.200 - 1.380	28	110
400	ESC4015H1G	3.850	56	45	230/1/50	1 1/2	1,1	ECC4015H1G	1/2	5/8	3,7	10,1	14,4	EEP4154W1G	1.200 - 1.380	30	135
	ESC4020H5G	5.100	88	76	400/3/50	2	1,5	ECC4020H5G	1/2	3/4	3,7	5,2	9	EEP4154W1G	3.220 - 3.180	30	135
500	ESC5030H5G	6.850	108	103	400/3/50	3	2,2	ECC5030H5G	1/2	3/4	4	6,9	11,8	EEP4214W1G	5.200 - 2.400	32	155

DIMENSIONS

COND.							EVAP.				
Series	A	B	C	D1	D2	Model	A	B	C	D1	D2
200	450	575	950	800	373	EEP4084	284	853	796	582	810
300	500	575	940	800	373	EEP4094	310	853	796	582	810
400	665	670	1.030	455	570	EEP4154	307	853	1.612	1.382	810
						EEP4154	307	853	1.612	1.382	810
500	915	750	1.050	480	630	EEP4214	310	848	1.900	1.731	790

U.C + EMB./PACK.					EVAP.+EMB./PACK.				
Series	A	B	C	kg	Model	A	B	C	kg
200	867	640	985	75	EEP4084	315	940	1.330	32
300	867	640	985	90	EEP4094	315	940	1.330	35
400	1.126	740	1.070	135	EEP4094	315	940	1.330	35
					EEP4154	315	940	1.330	55
500	1.136	1.000	1.350	180	EEP4214	315	940	1.730	65

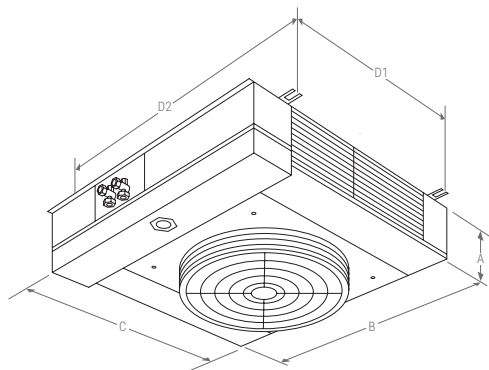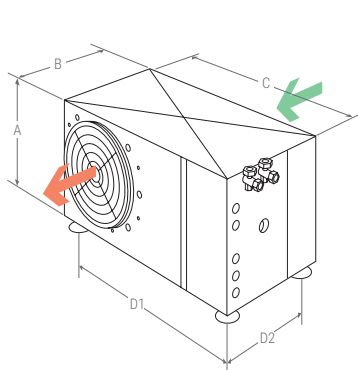

kide**MAXISPLIT****12°C****COMMERCIAL EQUIPMENT****WORK ROOMS****USC****HIGH
TEMPERATURE**

Maxi-split refrigeration units for medium volume cold storage rooms in high temperature applications.

**R-455A
R-454C****A2L**

GENERAL CHARACTERISTICS

- Pre-charged with nitrogen.
- Hermetic compressor.
- Expansion by thermostatic valve.
- Liquid receiver with safety valve.
- Ceramic filter dryer.
- Solenoid valve.
- Liquid sight glass.
- High and low pressure switch.
- Air defrosting.
- Remote multifunctional electronic control.
- Ceiling evaporator.
- Condensation control by pressure switch.
- Probe alert "dirty condenser".
- Voltage protector.
- Magnetothermic protection.
- Watertight electrical panel.
- Maneuver for air extraction in case of refrigerant in the environment.

OPTIONS

- Refrigerant R-454C.
- Refrigerant charged.
- Winter Kit.
- Rotation / failure system for two units.
- Synchronized defrost system for two units.
- Anti-corrosion treatment on condenser / evaporator coil.
- Time control.
- Oil separator.
- Evaporator condensate pump (max. Pumping head 1,5 m).
- Semi-hermetic compressor for models with a hermetic compressor.
- Humidifier external to the equipment and control.
- Special wooden packaging for container shipment.
- Monitoring and control system. See page 69.

Xweb

ELECTRONIC CONTROLLER

KIDE-Split units incorporate the advanced XW60K-2DI electronic controller as standard.

- Temperature control with maximum and minimum temperature recordings.
- "Jet Cool" function for rapid cooling
- Intelligent defrost.






12 °C +10°C ÷ 15 °C		Refrigeration capacity	 °C EXT	 °C EXT		Compressor		Model UC.	Liq	Suct	R-455A	Nominal consumption	Max. load current	Evap. model	Flow	Noise level	Weight	N° evap.
Series	Model		W	m³		m³	HP								kW			
600	USC6035H5G	8.150	170	130	400/3/50	3 1/2	2,6	UCC6035H5G	1/2	7/8	NITROGEN	7,58	9,40	EEP4214W1G	5.200 - 2.400	49	210	1
	USC6040H5G	9.525	210	170	400/3/50	4	3	UCC6040H5G	1/2	7/8		8,27	10,30	EEP4214W1G	5.200 - 2.400	49	210	1
700	USC7050H5G	11.300	250	215	400/3/50	5	3,7	UCC7050H5G	1/2	7/8		10,55	13,23	2 x EEP4154W1G	5.600 - 3.200	50	390	2
	USC7065H5G	14.390	285	250	400/3/50	6 1/2	4,8	UCC7065H5G	5/8	1 1/8		15,383	18,31	2 x EEP4214W1G	5.600 - 4.800	51	410	2
800	USC8070H5G	18.150	355	290	400/3/50	7	5,2	UCC8070H5G	5/8	1 3/8		18,23	21,49	2 x EEP4214W1G	9.600 - 4.800	52	430	2
	USC8100H5G	22.280	445	370	400/3/50	10	7,5	UCC8100H5G	5/8	1 3/8		24,88	28,48	2 x EEP4330W1G	9.600 - 6.780	52	470	2
	USC8130H5G	31.000	730	510	400/3/50	13	9,7	UCC8130H5G	5/8	1 3/8		26,69	33,49	3 x EEP4330W1G	13.500 - 10.170	60	550	3
	USC8150H5G	36.000	910	750	400/3/50	15	11,2	UCC8150H5G	7/8	1 5/8		31,7	37,44	3 x EEP4330W1G	13.500 - 10.170	60	560	3

i Indicative measurements for work rooms (for loading bays, please consult the technical office).

DIMENSIONS

Series	COND.				EVAP.				
	A	B	C	Model	A	B	C	D1	D2
600	770	1.180	590	EEP4214	307	583	1.612	1.382	810
				EEP4154	307	583	1.200	982	810
700	815	1.570	650	EEP4214	307	583	1.612	1.382	810
				EEP4154	307	583	1.200	982	810
800	945	2.050	790	EEP4214	307	583	1.612	1.382	810
				EEP4330	310	848	1.900	1.731	790

Series	U.C + EMB./PACK.				Model	EVAP.+EMB./PACK.			
	A	B	C	kg		A	B	C	kg
600	1.340	970	955	200	EEP4214	315	940	1.730	55
					EEP4154	315	940	1.330	80
700	1.740	1.050	1.005	250	EEP4214	315	940	1.730	150
					EEP4154	315	940	1.330	80
800	2.170	1.110	1.035	330	EEP4214	315	940	1.730	210
					EEP4330	315	940	1.730	210

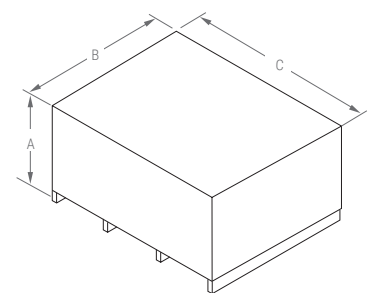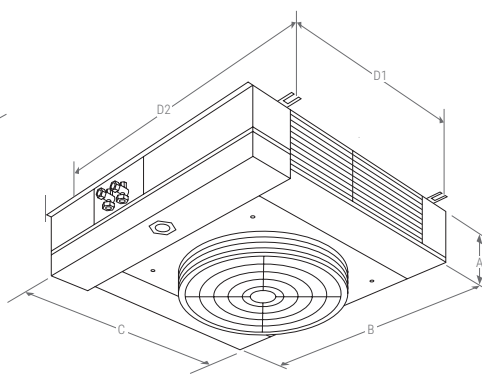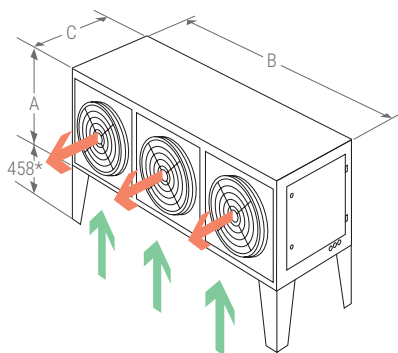

Transport legs: 100 mm high

kide**SPLIT****12 °C****COMMERCIAL EQUIPMENT**

WORK ROOMS

ESC**HIGH
TEMPERATURE**

Split refrigeration units specially designed for food handling and processing rooms, antechambers and loading areas, for use in high temperature applications.

R-449A

GENERAL CHARACTERISTICS

- Pre-charged with refrigerant (Max. length 10 m).
- Hermetic compressor / scroll.
- Service valves (Series 100 - 200 - 300).
- Liquid container.
- Ceramic filter dryer.
- Liquid sight glass.
- High and low pressure switch.
- Condensation control by pressure switch.
- Probe alert "dirty condenser".
- Thermostatic expansion valve in the evaporator.
- Solenoid valve is shipped loose for fitting to the evaporator.
- Automatic air defrosting.
- Double flow type evaporator with nitrogen with low air flow.
- Cable for light (3 m) (Series 100-200-300).
- Electrical interconnection (3) evaporator (10 m) (Series 100 - 200 - 300).
- Remote multifunctional electronic control (5 m) (Series 100 - 200 - 300).
- Cable for light (3 m) (Series 100-200-300).
- Voltage protector in three-phase version.

OPTIONS

- Winter Kit.
- Rotation / failure system for two units.
- Synchronized defrost system for two units.
- Voltage protector (single-phase version).
- Anti-corrosion treatment on condenser / evaporator coil.
- Independent electrical panel. See page 167.
- Evaporator condensate pump (max. Pumping head 1,5 m).
- Time control.
- Other voltages and 60 Hz.
- Humidifier external to the equipment and control.
- Oil separator (400-500 series).
- Anti-corrosive treatment for the condenser unit furniture
- Monitoring and control system. See page 69.

Xwzb

ELECTRONIC CONTROLLER

KIDE-Split units incorporate the advanced XW60K-2DI electronic controller as standard.

- Temperature control with maximum and minimum temperature recordings.
- "Jet Cool" function for rapid cooling
- Intelligent defrost.






CALCULATION BASIS - Pag. 168

12 °C +10°C ÷ 15 °C		Refrige- ration capacity				Compressor		Model UC.	Liq	Suct	R-449A	Nominal consump- tion	Max. load current	Evap. model	Flow	Noise level	Weight
			°C EXT	°C EXT							condens. evapora.						
Series	Model		W	m³							m³				HP		
100	ESC1005H1X	1.200	13	10	230/1/50	1/2	0,4	ECC1005H1X	3/8	1/2	1,6	2,9	3,6	EEP4084W1X	1.040 - 1.590	32	73
200	ESC2007H1X	1.900	22	17	230/1/50	3/4	0,5	ECC2007H1X	3/8	1/2	2,4	4,4	5,8	EEP4084W1X	1.040 - 1.590	42	92
300	ESC3008H1X	2.400	29	25	230/1/50	1	0,7	ECC3008H1X	3/8	1/2	3,3	5,5	6,9	EEP4094W1X	1.200 - 1.380	45	102
400	ESC4015H1X	3.300	48	36	230/1/50	1 1/2	1,1	ECC4015H1X	3/8	5/8	3,7	9,3	11,1	EEP4154W1X	1.200 - 1.380	45	135
	ESC4020H5X	5.100	96	76	400/3/50	2	1,5	ECC4020H5X	1/2	3/4	3,7	5,2	9	EEP4154W1X	3.220 - 3.180	45	135
500	ESC5030H5X	6.850	135	108	400/3/50	3	2,2	ECC5030H5X	1/2	3/4	3,7	6,9	11,8	EEP4214W1X	5.200 - 2.400	45	130

DIMENSIONS

Series	COND.						EVAP.				
	A	B	C	D1	D2	Modelo	A	B	C	D1	D2
100	370	460	760	610	276	EEP4084	284	853	796	582	810
200	450	575	950	800	373	EEP4084	284	853	796	582	810
300	500	575	940	800	373	EEP4094	310	853	796	582	810
400	665	670	1.030	455	570	EEP4154	307	853	1.612	1.382	810
						EEP4154	307	853	1.612	1.382	810
500	915	750	1.050	480	630	EEP4214	310	848	1.900	1.731	790

	U.C + EMB./PACK.					EVAP.+EMB./PACK.			
Series	A	B	C	kg	Modelo	A	B	C	kg
100	867	640	985	60	EEP4084	315	940	1.330	32
200	867	640	985	75	EEP4084	315	940	1.330	32
300	867	640	985	90	EEP4094	315	940	1.330	35
400	1.126	740	1.070	135	EEP4094	315	940	1.330	35
					EEP4154	315	940	1.330	55
500	1.136	1.000	1.350	180	EEP4214	315	940	1.730	65

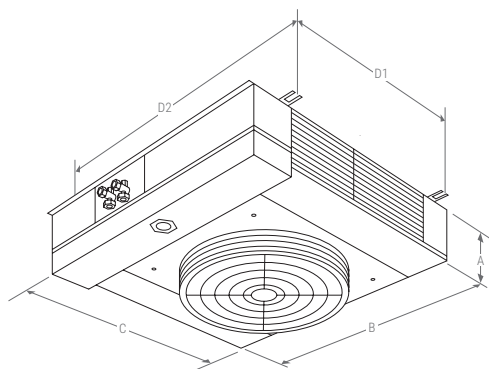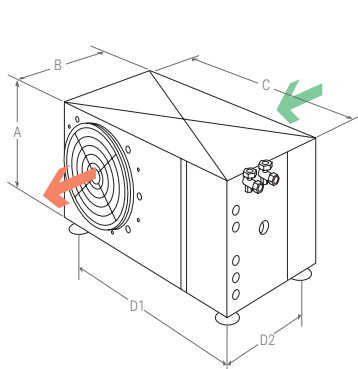

COMMERCIAL EQUIPMENT

WORK ROOMS

USC

HIGH
TEMPERATURE

Maxi-split refrigeration units for medium volume cold storage rooms in high temperature applications.



R-449A

GENERAL CHARACTERISTICS

- Pre-charged with nitrogen.
- Hermetic compressor.
- Expansion by thermostatic valve.
- Liquid receiver with safety valve.
- Ceramic filter dryer.
- Liquid sight glass.
- High and low pressure switch.
- Air defrosting.
- Remote multifunctional electronic control.
- Ceiling evaporator.
- Condensation control by pressure switch.
- Probe alert "dirty condenser".
- Voltage protector.
- Magnetothermic protection.

OPTIONS

- Refrigerant charged.
- Winter Kit.
- Rotation / failure system for two units.
- Synchronized defrost system for two units.
- Anti-corrosion treatment on condenser / evaporator coil.
- Time control.
- Semi-hermetic compressor for models with a hermetic compressor.
- Other voltages and 60 Hz.
- Humidifier external to the equipment and control.
- Oil separator.
- Special wooden packaging for container shipment.
- Evaporator condensate pump (max. Pumping head 1.5 m).
- Monitoring and control system See page 69.

Xwzb

ELECTRONIC CONTROLLER

KIDE-Split units incorporate the advanced XW60K-2DI electronic controller as standard.

- Temperature control with maximum and minimum temperature recordings.
- "Jet Cool" function for rapid cooling
- Intelligent defrost.



CALCULATION BASIS - Pag. 168




12 °C +10°C ÷ 15 °C		Refrigeration capacity	°C EXT	°C EXT		Compressor		Model UC.	Liq	Suct	R-449A	Nominal consumption	Max. load current	Evap. model	Flow	Noise level	Weight	N° evap.
Series	Model														condens. evapora.			
		W	m³	m³		HP	kW					A	A		m³/h	dBA	kg	
600	USC6035H5X	8.150	170	130	400/3/50	3 1/2	2,6	UCC6035H5X	1/2	7/8	NITROGEN	7,58	9,40	EEP4214W1X	5.200 - 2.400	49	210	1
	USC6040H5X	9.525	210	170	400/3/50	4	3	UCC6040H5X	1/2	7/8		8,27	10,30	EEP4214W1X	5.200 - 2.400	49	210	1
700	USC7050H5X	11.300	250	215	400/3/50	5	3,7	UCC7050H5X	1/2	7/8		10,55	13,23	2 x EEP4154W1X	5.600 - 3.200	50	390	2
	USC7065H5X	14.390	285	250	400/3/50	6 1/2	4,8	UCC7065H5X	5/8	1 1/8		15,383	18,31	2 x EEP4214W1X	5.600 - 4.800	51	410	2
800	USC8070H5X	18.150	355	290	400/3/50	7	5,2	UCC8070H5X	5/8	1 3/8		18,23	21,49	2 x EEP4214W1X	9.600 - 4.800	52	430	2
	USC8100H5X	22.280	445	370	400/3/50	10	7,5	UCC8100H5X	5/8	1 3/8		24,88	28,48	2 x EEP4330W1X	9.600 - 6.780	52	470	2
	USC8130H5X	31.000	730	510	400/3/50	13	9,7	UCC8130H5X	5/8	1 3/8		26,69	33,49	3 x EEP4330W1X	13.500 - 10.170	60	550	3
	USC8150H5X	36.000	910	750	400/3/50	15	11,2	UCC8150H5X	7/8	1 5/8		31,7	37,44	3 x EEP4330W1X	13.500 - 10.170	60	560	3

i Indicative measurements for work rooms (for loading bays, please consult the technical office).

DIMENSIONS

Series	COND.				EVAP.				
	A	B	C	Model	A	B	C	D1	D2
600	770	1.180	590	EEP4214	307	583	1.612	1.382	810
				EEP4154	307	583	1.200	982	810
700	815	1.570	650	EEP4214	307	583	1.612	1.382	810
				EEP4154	307	583	1.200	982	810
800	945	2.050	790	EEP4214	307	583	1.612	1.382	810
				EEP4330	310	848	1.900	1.731	790

	U.C + EMB./PACK.					EVAP.+EMB./PACK.			
Series	A	B	C	kg	Model	A	B	C	kg
600	1.340	970	955	200	EEP4214	315	940	1.730	55
700	1.740	1.050	1.005	250	EEP4154	315	940	1.330	80
					EEP4214	315	940	1.730	150
800	2.170	1.110	1.035	330	EEP4214	315	940	1.730	210
					EEP4330	315	940	1.730	210

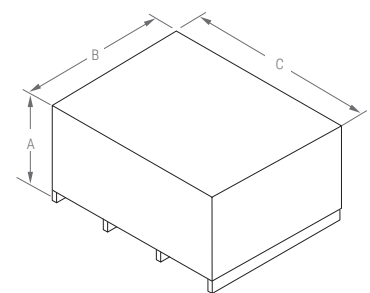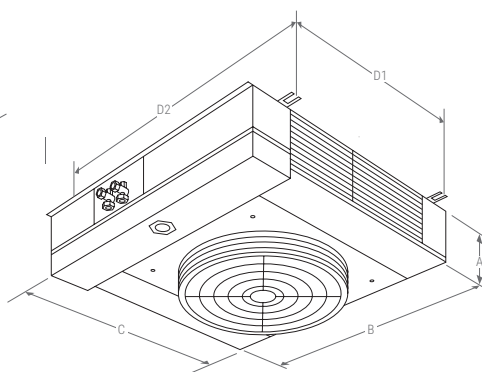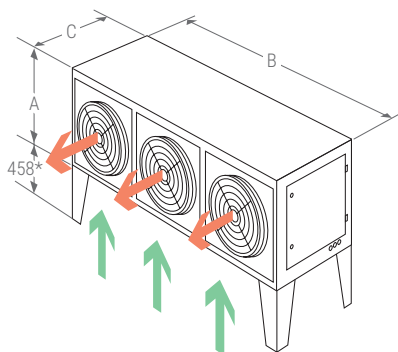

Transport legs: 100 mm high

kide**SPLIT****-20 °C****0 °C****COMMERCIAL EQUIPMENT****CENTRIFUGAL
SPLIT****ESF**

Commercial split refrigeration units for small volume cold storage rooms, with centrifugal fan, in medium and low temperature applications.

**R-455A
R-454C****A2L****GENERAL CHARACTERISTICS**

- Pre-charged with refrigerant (Max. length 10 m).
- Hermetic compressor.
- Service valves (Series 100 - 200 - 300).
- Liquid receiver.
- Ceramic filter dryer.
- Liquid sight glass.
- High and low pressure switch.
- Condensation control by pressure switch.
- Probe alert "dirty condenser".
- Thermostatic expansion valve in the evaporator.
- Solenoid valve in the evaporator.
- Centrifuge fan in the condenser (Max. length 10m, min. diameter 250 mm Series 100 ,315 mm Series 200-300 and 300x260 mm Serie 400).
- Automatic defrosting by heating element.
- Draintipe heating element in low T^a (2 m).
- Ceiling type evaporator with nitrogen (Series 100 - 200 - 300).
- Cubic evaporator with nitrogen (Series 400 - 500).
- Electrical supply cable (3 m) (Series 100 - 200 - 300).
- Electrical interconnection (2) evaporator (10 m) (Series 100 - 200 - 300).
- Remote multifunctional electronic control (5 m) (Series 100 - 200 - 300).
- Cable for light (3 m) (Series 100-200-300).
- Indoor use.
- Watertight electrical panel.
- Air extraction fan.
- Liquid injection in 400-500 series.

OPTIONS

- Winter Kit.
- Rotation / failure system for two units.
- Synchronized defrost system for two units.
- Voltage protector.
- Anti-corrosion treatment on condenser / evaporator coil.
- Exhaust air duct (100-200-300 series).
- Time control.
- Cubic evaporator (100-200-300 series).
- Humidifier external to the equipment and control (cooling).
- Electric box not integrated in the unit (independent).
- Anti-corrosive treatment for the condenser unit furniture.
- Monitoring and control system. See page 69.

Xwzb**ELECTRONIC CONTROLLER**

KIDE-Split units incorporate the advanced XW60K-2DI electronic controller as standard.

- Temperature control with maximum and minimum temperature recordings.
- "Jet Cool" function for rapid cooling
- Intelligent defrost.



CALCULATION BASIS - Pag. 168

0 °C -5 °C ÷ 10 °C		Refrigeration capacity	°C EXT	°C EXT		Compressor		Model UC.	Liq	Suct	R-455A	Nominal consumption	Max. load current	Evap. model	Flow	Noise level	Weight
Series	Model	W	m³	m³		HP	kW				kg	A	A		condens. evapora. m³/h		
100	ESF1006M1G	1.145	9	7	230/1/50	3/4	0,5	ECF1006M1G	3/8	1/2	<2	5,4	7,6	EEC3001M1G	1.030 - 1.000	32	72
	ESF1007M1G	1.475	12	9	230/1/50	1	0,7	ECF1007M1G	3/8	1/2	<2	6,5	9,2	EEC3001M1G	1.030 - 1.000	32	72
200	ESF2010M1G	1.750	16	14	230/1/50	1 1/4	0,9	ECF2010M1G	3/8	5/8	<3	9,4	11,3	EEC3022M1G	1.370 - 2.000	42	88
300	ESF3017M5G	2.510	30	25	400/3/50	1 1/2	1,1	ECF3017M5G	3/8	3/4	<3,5	5,3	6,4	EEC3003M1G	1.370 - 3.000	45	113
	ESF3020M5G	3.100	40	32	400/3/50	2	1,5	ECF3020M5G	3/8	3/4	<4	6,0	7,4	EEC3003M1G	1.370 - 3.000	45	113
400	ESF4025M5G	4.300	65	50	400/3/50	2 1/2	1,8	EEC2206M1G	1/2	3/4	<5,5	8,6	11,7	EEC2206M1G	2.900 - 3.200	45	170
	ESF4030M5G	5.020	86	67	400/3/50	3	2,2	ECF4030M5G	1/2	3/4	4,5	9,6	11,8	EEC2206M1G	2.900 - 3.200	45	170
	ESF4035M5G	6.010	106	85	400/3/50	3 1/2	2,6	ECF4035M5G	1/2	3/4	4,5	10,0	13,9	EEC2236M1G	2.900 - 5.490	45	170
500	ESF5040M5G	7.150	130	100	400/3/50	4	3	ECF5040M5G	1/2	7/8	5	11,6	16,3	EEC2316M1G	3.270 - 5.600	45	200

i If the equipment is to operate in a working range between 0 and -5 °C, it will be necessary to include a drain resistor. (Consult the technical office).

-20 °C -25 °C ÷ -15 °C		Refrigeration capacity	°C EXT	°C EXT		Compressor		Model UC.	Liq	Suct	R-455A	Nominal consumption	Max. load current	Evap. model	Flow	Noise level	Weight
Series	Model	W	m³	m³		HP	kW				kg	A	A		condens. evapora. m³/h		
100	ESF1010L1G	850	5	4	230/1/50	3/4	0,5	ECF1010L1G	3/8	5/8	<1	5,3	7,5	EEC3001L1G	1.030 - 1.300	32	71
	ESF1015L1G	1.100	8	5	230/1/50	1 1/4	0,9	ECF1015L1G	3/8	5/8	<1	6,3	9,2	EEC3001L1G	1.030 - 1.300	32	67
200	ESF2015L1G	1.350	15	10	230/1/50	1 3/4	1,3	ECF2015L1G	3/8	5/8	<1,5	8,1	11,5	EEC3002L1G	1.370 - 3.000	40	94
300	ESF3017L5G	1.500	20	14	400/3/50	2	1,5	ECF3017L5G	3/8	3/4	<2	5,3	6,1	EEC3003L1G	1.370 - 4.000	45	123
	ESF3020L5G	2.000	25	18	400/3/50	2 1/2	1,8	ECF3020L5G	3/8	3/4	<2	6,9	8,9	EEC3003L1G	1.370 - 4.000	45	123
400	ESF4030L5G	2.840	36	28	400/3/50	3	2,2	ECF4030L5G	1/2	3/4	<5,5	9,7	14,8	EEC2156L1G	2.900 - 3.670	45	170
	ESF4040L5G	3.605	52	40	400/3/50	4	3	ECF4040L5G	1/2	3/4	<5,5	11,8	17,0	EEC2206L1G	2.900 - 3.200	45	180
500	ESF5050L5G	4.325	76	56	400/3/50	5	3,7	ECF5050L5G	1/2	7/8	<5,5	13,6	20,5	EEC2236L1G	3.270 - 5.490	45	190
	ESF5060L5G	5.300	111	77	400/3/50	6	4,7	ECF5060L5G	1/2	1 1/8	<5,5	15,8	24,8	EEC2316L1G	3.270 - 5.600	45	220




i Calculation made for 10 m equivalent lenght.

In the "SPLIT" units KIDE advises to install the drain pipe with syphon out of the coldroom.
For freezer rooms the piping should be metallic.
Duct must always go connected to the fan (Max. 10 m).

DIMENSIONS

Series	COND.						EVAP.					
	A	B	C	D1	D2	Model	A	B	C	D1	D2	
100	370	385	710	610	276	1L	210	425	920	670	460	
						1M	250	500	820	570	440	
200	450	485	900	800	373	2L	250	500	1.310	1.050	460	
						2M	250	500	1.200	950	460	
300	500	485	900	800	373	3L	280	500	1.890	1.620	460	
						3M	280	500	1.690	1.420	460	
400	665	670	1.030	445	570	L403	440	450	1.145	925	410	
						L404	440	450	1.145	1.375	410	
						M425-30	440	450	1.145	1.375	410	
						M435	440	450	1.595	1.375	410	
500	915	750	1.050	480	630	L505	440	450	1.595	1.375	410	
						L506	565	490	1.565	1.345	450	
						M5	565	490	1.565	1.345	450	

Series	U.C + EMB./PACK.				kg	EVAP.+EMB./PACK.				kg
	A	B	C			Model	A	B	C	
100	876	640	985	60		1L	300	530	1.015	25
						1M	300	530	1.015	20
200	876	640	985	75		2L	300	530	1.395	35
						2M	300	530	1.395	30
300	876	640	985	90		3L	330	535	1.980	50
						3M	330	535	1.980	45
400	1.126	740	1.070	130		L403	530	530	1.180	35
						L404	530	530	1.180	40
						M425-30	530	530	1.180	40
						M435	530	530	1.630	50
500	1.136	1.000	1.350	180		L505	530	530	1.630	50
						L507	655	570	1.600	55
						M5	655	570	1.600	55



COMMERCIAL EQUIPMENT

CENTRIFUGAL
SPLIT

ESF

Commercial split refrigeration units for small volume cold storage rooms, with centrifugal fan, in medium and low temperature applications.

R-449A
R-452A

GENERAL CHARACTERISTICS

- Pre-charged with refrigerant (Max. length 10 m).
- Hermetic compressor.
- Service valves (Series 100 - 200 - 300).
- Liquid receptacle.
- Ceramic filter dryer.
- Liquid sight glass.
- Centrifuge fan in the condenser (Max. length 10m, min. diameter, 315 mm Series 200-300 and 300x260 mm Serie 400).
- High and low pressure switch.
- Condensation control by pressure switch.
- Probe alert "dirty condenser".
- Thermostatic expansion valve in the evaporator.
- Solenoid valve in the evaporator.
- Automatic defrosting by heating element.
- Draihtype heating element in low T^a (2 m).
- Ceiling type evaporator with nitrogen (Series 100 - 200 - 300).
- Cubic evaporator with nitrogen (Series 400 - 500).
- Electrical supply cable (3 m) (Series 100 - 200 - 300).
- Electrical interconnection (2) evaporator (10 m) (Series 100 - 200 - 300).
- Remote multifunctional electronic control (5 m) (Series 100 - 200 - 300).
- Cable for light (3 m) (Series 100-200-300).
- Indoor use.
- Liquid injection in 400-500 series.

OPTIONS

- Winter Kit.
- Rotation / failure system for two units.
- Synchronized defrost system for two units.
- Voltage protector.
- Anti-corrosion treatment on condenser / evaporator coil.
- Exhaust air duct (100-200-300 series).
- Humidifier external to the equipment and control (cooling).
- Cubic evaporator (100-200-300 series).
- Independent electrical panel. See page 167.
- Time control.
- Other voltages and 60 Hz. Request.
- Anti-corrosive treatment for the condenser unit furniture
- Monitoring and control system. See page 69.

Xwzb

ELECTRONIC CONTROLLER

KIDE-Split units incorporate the advanced XW60K-2DI electronic controller as standard.

- Temperature control with maximum and minimum temperature recordings.
- "Jet Cool" function for rapid cooling
- Intelligent defrost.



CALCULATION BASIS - Pag. 168

0 °C -5 °C ÷ 10 °C		Refrigera- tion capacity	❄️ °C EXT	☀️ °C EXT	⚡	Compressor		Model UC.	Liq	Suct	R-449A	Nominal consump- tion	Max. load current	Evap. model	Flow condens. evapora.	Noise level	Weight
Series	Model	W	m³	m³		HP	kW				kg	A	A		m³/h	dBA	kg
100	ESF1005M1X	850	6	5	230/1/50	1/2	0,4	ECF1005M1X	3/8	1/2	<2	3,0	3,8	EEC3000M1X	1.100 - 440	32	50
	ESF1006M1X	1.157	9	7	230/1/50	1/2	0,4	ECF1006M1X	3/8	1/2	<2	4,3	5,7	EEC3001M1X	1.030 - 1.000	32	62
	ESF1007M1X	1.340	12	9	230/1/50	3/4	0,5	ECF1007M1X	3/8	1/2	<2	4,7	6,1	EEC3001M1X	1.030 - 1.000	32	62
200	ESF2008M1X	1.650	16	14	230/1/50	1	0,7	ECF2008M1X	3/8	5/8	<3	6,7	8,1	EEC3022M1X	1.920 - 2.000	42	83
	ESF2010M1X	1.975	20	17	230/1/50	1 1/4	0,9	ECF2010M1X	3/8	5/8	<3	8,2	10,4	EEC3022M1X	1.370 - 2.000	42	88
	ESF2015M1X ⁽¹⁾	2.400	29	25	230/1/50	1 1/2	1,1	ECF2015M1X	3/8	5/8	<3	9,5	11,3	EEC3002M1X	1.920 - 2.000	42	108
300	ESF3017M5X	2.899	37	30	400/3/50	1 3/4	1,3	ECF3017M5X	3/8	3/4	<4	5,3	6,4	EEC3003M1X	1.370 - 3.000	45	113
	ESF3020M5X	3.579	45	37	400/3/50	2	1,5	ECF3020M5X	3/8	3/4	<4	6,0	7,4	EEC3003M1X	1.370 - 3.000	45	113
400	ESF4025M5X	4.250	65	50	400/3/50	2 1/4	1,7	ECF4025M5X	1/2	3/4	<5,5	8,6	11,7	EEC2206M1X	2.900 - 3.200	45	170
	ESF4030M5X	4.950	86	67	400/3/50	3	2,2	ECF4030M5X	1/2	3/4	<4,5	9,6	11,8	EEC2206M1X	2.900 - 3.200	45	170
	ESF4035M5X	6.150	109	88	400/3/50	3 1/2	2,6	ECF4035M5X	1/2	3/4	<7	10,0	13,9	EEC2236M1X	2.900 - 5.490	45	170
500	ESF5040M5X	7.400	135	105	400/3/50	4	3	ECF5040M5X	1/2	7/8	<8	11,6	16,3	EEC2316M1X	3.270 - 5.600	45	200

i If the equipment is to operate in a working range between 0 and -5 °C, it will be necessary to include a drain resistor. (Consult the technical office).

(1) Equipment available in three-phase.

-20 °C -25 °C ÷ -15 °C		Refrigera- tion capacity	❄️ °C EXT	☀️ °C EXT	⚡	Compressor		Model UC.	Liq	Suct	R-449A	Nominal consump- tion	Max. load current	Evap. model	Flow	Noise level	Weight
							condens. evapora.										
Series	Model	W	m³	m³		HP	kW								m³/h		
100	ESF1005L1X*	650	4	3	230/1/50	3/4	0,5	ECF1005L1X	3/8	5/8	<2	3,2	4,5	EEC3000L1X	1.100 - 440	32	62
	ESF1007L1X*	800	5	4	230/1/50	1	0,7	ECF1007L1X	3/8	5/8	<2	4,3	5,8	EEC3001L1X	1.100 - 1.300	32	62
	ESF1010L1X*	950	6	5	230/1/50	1	0,7	ECF1010L1X	3/8	5/8	<2	5,1	6,7	EEC3001L1X	1.030 - 1.300	32	67
	ESF1015L1X*	1.200	9	6	230/1/50	1 1/2	1,1	ECF1015L1X	3/8	5/8	<2	6,5	9,2	EEC3001L1X	1.030 - 1.300	32	67
200	ESF2015L1X*	1.280	11	8	230/1/50	1 1/2	1,1	ECF2015L1X	3/8	5/8	<2,5	7,3	10,2	EEC3002L1X	1.370 - 3.000	40	88
	ESF2017L5T**	1.341	15	10	400/3/50	1 3/4	1,3	ECF2017L5T	3/8	5/8	<2,5	4,8	5,6	EEC3002L1T	1.370 - 3.000	42	93
300	ESF3017L5T**	1.620	22	15	400/3/50	2	1,5	ECF3017L5T	3/8	3/4	<3,5	5,3	6,1	EEC3003L1T	1.370 - 4.000	45	123
	ESF3020L5T**	2.218	27	19	400/3/50	2 1/2	1,8	ECF3020L5T	3/8	3/4	<3,5	6,9	8,9	EEC3003L1T	1.370 - 4.000	45	123
400	ESF4030L5X*	2.775	35	28	400/3/50	3	2,2	ECF4030L5X	1/2	3/4	<4,5	9,7	14,8	EEC2156L1X	2.900 - 3.670	45	170
	ESF4040L5X	3.425	52	40	400/3/50	4	2,9	ECF4040L5X	1/2	3/4	<4,5	11,8	17,0	EEC2206L1X	2.900 - 3.200	45	180
500	ESF5050L5X	4.325	76	56	400/3/50	5	3,7	ECF5050L5X	1/2	7/8	<8	13,6	20,5	EEC2236L1X	3.270 - 5.490	45	190
	ESF5060L5X	5.300	111	77	400/3/50	6	4,5	ECF5060L5X	1/2	1 1/8	<9	15,8	24,8	EEC2316L1X	3.270 - 5.600	45	220

* Available in R-452A

** Equipment with R-452A

i Calculation made for 10 m equivalent length.

In the "SPLIT" units KIDE advises to install the drain pipe with syphon out of the coldroom.




For freezer rooms the piping should be metallic.

Duct must always go connected to the fan (Max. 10 m).

DIMENSIONS

	COND.						EVAP					
Series	A	B	C	D1	D2	Model	A	B	C	D1	D2	
100	370	385	710	610	276	0L-0M	480	195	520	348	230	
						1L	210	425	920	670	460	
						1M	250	500	820	570	440	
200	450	485	900	800	373	2L	250	500	1.310	1.050	460	
						2M	250	500	1.200	950	460	
300	500	485	900	800	373	3L	280	500	1.890	1.620	460	
						3M	280	500	1.690	1.420	460	
400	665	670	1.030	445	570	L403	440	450	1.145	925	410	
						L404	440	450	1.145	925	410	
						M425-30	440	450	1.145	925	410	
						M435	440	450	1.595	1.375	410	
500	915	750	1.050	480	630	L505	440	450	1.595	1.375	410	
						L507	565	490	1.565	1.345	450	
						M5	565	490	1.565	1.345	450	

Series	U.C + EMB./PACK.				EVAP+EMB./PACK.			
	A	B	C	kg	Model	A	B	kg
100	876	640	985	60	0L-0M	300	530	1.015
					1L	300	530	1.015
					1M	300	530	1.015
200	876	640	985	75	2L	300	530	1.395
					2M	300	530	1.395
300	876	640	985	90	3L	330	535	1.980
					3M	330	535	1.980
					L403	530	530	1.180
400	1.126	740	1.070	130	L404	530	530	1.180
					M425-30	530	530	1.180
					M435	530	530	1.630
500	1.136	1.000	1.350	180	L505	530	530	1.630
					L507	655	570	1.600
					M5	655	570	1.600



COMMERCIAL EQUIPMENT

WORK ROOMS

ESF



Commercial split refrigeration units for small volume cold storage rooms, with centrifugal fan, specially designed for food handling and processing rooms, antechambers and loading areas. For high temperature applications.

NEW

R-455A
R-454C

A2L



GENERAL CHARACTERISTICS

- Pre-charged with refrigerant (Max. length 10 m).
- Hermetic compressor.
- Service valves (Series 200 - 300).
- Liquid receptacle.
- Ceramic filter dryer.
- Liquid sight glass.
- High and low pressure switch.
- Condensation control by pressure switch.
- Probe alert "dirty condenser".
- Centrifuge fan in the condenser (Max. length 10m, min. diameter, 315 mm Series 200-300 and 300x260 mm Serie 400).
- Thermostatic expansion valve in the evaporator.
- Solenoid valve is shipped loose for fitting to the evaporator.
- Automatic defrosting by heating element.
- Double flow type evaporator with nitrogen with low air flow.
- Cable for light (3 m) (Series 200 - 300).
- Electrical interconnection (3) evaporator (10 m) (Series 200 - 300).
- Remote multifunctional electronic control (5 m) (Series 200 - 300).
- Cable for light (3 m) (Series 200-300).
- Voltage protector in three-phase version.
- Air extraction fan.
- Watertight electrical panel.

OPTIONS

- Winter Kit.
- Rotation / failure system for two units.
- Synchronized defrost system for two units.
- Voltage protector (single-phase version).
- Built-in condensate pump on double-flow evaporators (max. Pumping head 1,5 m).
- Anti-corrosion treatment on condenser / evaporator coil.
- Exhaust air duct (200-300 series).
- Independent electrical panel. (100-200-300 series). See page 167.
- Time control.
- Humidifier external to the equipment and control.
- Anti-corrosive treatment for the condenser unit furniture.
- Monitoring and control system. See page 69.

Xwzb

ELECTRONIC CONTROLLER

KIDE-Split units incorporate the advanced XW60K-2DI electronic controller as standard.

- Temperature control with maximum and minimum temperature recordings.
- "Jet Cool" function for rapid cooling
- Intelligent defrost.






CALCULATION BASIS - Pag. 168

12 °C +10°C ÷ 15 °C		Refrigeration capacity	°C EXT	°C EXT		Compressor		Model UC.	Liq	Suct	R-455A	Nominal consumption	Max. load current	Evap. model	Flow	Noise level	Weight
Series	Model	W	m³	m³		HP	kW				kg	A	A		condens. evapora.		
															m³/h	dBA	kg
200	NEW ESF2007H1G	2.130	27	20	230/1/50	3/4	0,5	ECF2007H1G	3/8	1/2	2,4	5,8	8,0	EEP4084W1G	1.040 - 1.590	25	100
300	NEW ESF3008H1G	2.810	41	30	230/1/50	1	0,7	ECF3008H1G	3/8	1/2	3	6,9	9,7	EEP4094W1G	1.200 - 1.380	28	110
400	NEW ESF4015H1G	3.850	56	45	230/1/50	1 1/2	1,1	ECF4015H1G	1/2	5/8	3,7	12,9	17,1	EEP4094W1G	1.200 - 1.380	30	135
	NEW ESF4020H5G	5.100	96	76	400/3/50	2	1,5	ECF4020H5G	1/2	3/4	3,7	7,9	11,6	EEP4154W1G	3.220 - 3.180	30	135
500	NEW ESF5030H5G	6.850	135	108	400/3/50	3	2,2	ECF5030H5G	1/2	3/4	4	10,2	15,1	EEP4214W1G	5.200 - 2.400	32	155

DIMENSIONS

Series	COND.						EVAP.				
	A	B	C	D1	D2	Model	A	B	C	D1	D2
200	450	485	900	800	373	EEP4084	284	853	796	582	810
300	500	485	900	800	373	EEP4094	310	853	796	582	810
400	665	670	1.030	445	570	EEP4094	310	853	796	582	810
						EEP4154	307	853	1.612	1.382	810
500	915	750	1.050	480	630	EEP4214	310	848	1.900	1.731	790

Series	U.C + EMB./PACK.				Model	EVAP.+EMB./PACK.			
	A	B	C	kg		A	B	C	kg
200	867	640	985	75	EEP4084	315	940	1.330	32
300	867	640	985	90	EEP4094	315	940	1.330	35
400	1.126	740	1.070	130	EEP4094	315	940	1.330	35
					EEP4154	315	940	1.330	55
500	1.136	1.000	1.350	180	EEP4214	315	940	1.730	65

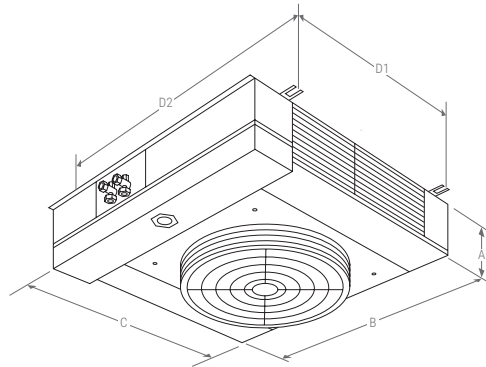

COMMERCIAL EQUIPMENT

WORK ROOMS

ESF



Commercial split refrigeration units for small volume cold storage rooms, with centrifugal fan, specially designed for food handling and processing rooms, antechambers and loading areas. For high temperature applications.

NEW

R-449A



GENERAL CHARACTERISTICS

- Pre-charged with refrigerant (Max. length 10 m).
- Hermetic compressor.
- Service valves (Series 200 - 300).
- Liquid receptacle.
- Ceramic filter dryer.
- Liquid sight glass.
- High and low pressure switch.
- Condensation control by pressure switch.
- Probe alert "dirty condenser".
- Centrifuge fan in the condenser (Max. length 10 m, min. diameter, 315 mm Series 200 - 300 and 300x260 mm Serie 400).
- Thermostatic expansion valve in the evaporator.
- Solenoid valve is shipped loose for fitting to the evaporator.
- Automatic air defrosting.
- Double flow type evaporator with nitrogen with low air flow.
- Electrical supply cable (3 m) (Series 200 - 300).
- Electrical interconnection (3) evaporator (10 m) (Series 200 - 300).
- Remote multifunctional electronic control (5 m) (Series 200 - 300).
- Cable for light (3 m) (Series 200-300).
- Voltage protector in three-phase version.

OPTIONS

- Winter Kit.
- Rotation / failure system for two units.
- Synchronized defrost system for two units.
- Voltage protector (single-phase version).
- Built-in condensate pump on double-flow evaporators (max. Pumping head 1,5 m).
- Anti-corrosion treatment on condenser / evaporator coil.
- Exhaust air duct (200 - 300 series).
- Other voltages and 60 Hz. Request.
- Time control.
- Humidifier external to the equipment and control.
- Independent electrical panel. (200-300 series). See page 167.
- Anti-corrosive treatment for the condenser unit furniture.
- Monitoring and control system. See page 69.

Xweb

ELECTRONIC CONTROLLER

KIDE-Split units incorporate the advanced XW60K-2DI electronic controller as standard.

- Temperature control with maximum and minimum temperature recordings.
- "Jet Cool" function for rapid cooling
- Intelligent defrost.






CALCULATION BASIS - Pag. 168

12 °C +10°C ÷ 15 °C		Refrigera- tion capacity	°C EXT	°C EXT		Compressor		Model UC.	Liq	Suct	R-455A	Nominal consump- tion	Max. load current	Evap. model	Flow	Noise level	Weight
Series	Model	W	m³	m³		HP	kW				kg	A	A		condens. evapora. m³/h	dBA	kg
200	NEW ESF2007H1X	1.900	22	17	230/1/50	3/4	0,5	ECF2007H1X	3/8	1/2	2,4	5,1	6,4	EEP4084W1X	1.040 - 1.590	25	100
300	NEW ESF3008H1X	2.400	29	25	230/1/50	1	0,7	ECF3008H1X	3/8	1/2	3	6,1	7,5	EEP4094W1X	1.200 - 1.380	28	110
400	NEW ESF4015H1X	3.300	48	36	230/1/50	1 1/2	1,1	ECF4015H1X	3/8	1/2	3,7	12,1	13,9	EEP4094W1X	1.200 - 1.380	30	135
	NEW ESF4020H5X	5.100	96	76	400/3/50	2	1,5	ECF4020H5X	3/8	3/4	3,7	7,9	11,6	EEP4154W1X	3.220 - 3.180	30	135
500	NEW ESF5030H5X	6.850	135	108	400/3/50	3	2,2	ECF5030H5X	1/2	3/4	4	10,2	15,1	EEP4214W1X	5.200 - 2.400	32	155

DIMENSIONS

Series	COND.						EVAP.				
	A	B	C	D1	D2	Model	A	B	C	D1	D2
200	450	485	900	800	373	EEP4084	284	853	796	582	810
300	500	485	900	800	373	EEP4094	310	853	796	582	810
400	665	670	1.030	445	570	EEP4094	310	853	796	582	810
						EEP4154	307	853	1.612	1.382	810
500	915	750	1.050	480	630	EEP4214	310	848	1.900	1.731	790

Series	U.C + EMB./PACK.				Model	EVAP.+EMB./PACK.			
	A	B	C	kg		A	B	C	kg
200	867	640	985	75	EEP4084	315	940	1.330	32
300	867	640	985	90	EEP4094	315	940	1.330	35
400	1.126	740	1.070	130	EEP4094	315	940	1.330	35
					EEP4154	315	940	1.330	55
500	1.136	1.000	1.350	180	EEP4214	315	940	1.730	65

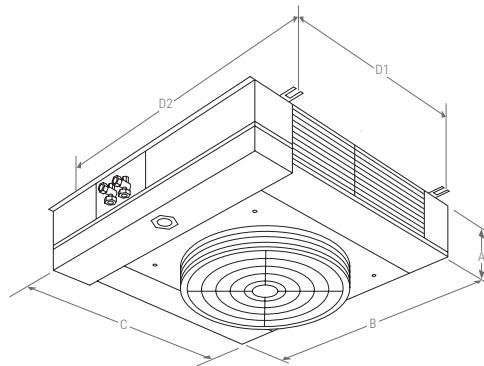



-20 °C 0 °C



COMMERCIAL EQUIPMENT

SILENT SPLIT

ESS

Silent commercial split refrigeration units for small and medium volume cold storage rooms in medium and low temperature applications.



GENERAL CHARACTERISTICS

- Pre-charged with refrigerant R-455A (Max. length 10 m).
- Scroll compressor in the three-phase units soundproof compartment and separated from the air flow.
- Hermetic compressor on single phase units.
- Oversized condenser coil with low speed fans.
- Service valves (Series 100 - 200 - 300).
- Liquid receiver.
- Ceramic filter dryer.
- Liquid sight glass.
- High and low pressure switch.
- Condensation control by pressure switch.
- Probe alert "dirty condenser".
- Thermostatic expansion valve in the evaporator.
- Solenoid valve in the evaporator.
- Automatic defrosting by heating element.
- Draihtype heating element in low T^a (2 m).
- Ceiling type evaporator with nitrogen (Series 100 - 200 - 300).
- Electrical supply cable (3 m) (Series 100 - 200 - 300).
- Electrical interconnection (2) evaporator (10 m) (Series 100 - 200 - 300).
- Remote multifunctional electronic control (5 m) (Series 100 - 200 - 300).
- Cable for light (3 m) (Series 100-200-300).
- Voltage protector.
- Magneto thermic protection (three-phase units).
- Watertight electrical panel.
- Air extraction fan.
- Liquid injection in 400-500 series.

OPTIONS

- Winter Kit.
- Rotation / failure system for two units.
- Synchronized defrost system for two units.
- Anti-corrosion treatment on condenser / evaporator coil.
- Oil separator (except serie 100)
- Voltage protector (single-phase version).
- Time control.
- Humidifier external to the equipment and control (cooling).
- Cubic evaporator (100-200-300 series).
- Anti-corrosive treatment for the condenser unit furniture
- Monitoring and control system. See page 69.



ELECTRONIC CONTROLLER

KIDE-Split units incorporate the advanced XW60K-2DI electronic controller as standard.

- Temperature control with maximum and minimum temperature recordings.
- "Jet Cool" function for rapid cooling
- Intelligent defrost.



CALCULATION BASIS - Pag. 168

0 °C -5 °C ÷ 10 °C		Refrigeration capacity	°C EXT	°C EXT		Compressor		Model UC.	Liq	Suct	R-455A	Nominal consumption	Max. load current	Evap. model	Flow	Noise level	Weight
Series	Model	W	m³	m³		HP	kW				kg	A	A		m³/h	dBA	kg
100	ESS1007M1G	1.475	12	9	230/1/50	1	0,7	ECS1007M1G	3/8	1/2	<2	6,1	8,9	EEC3001M1G	730 - 1.000	25	70
200	ESS2010M1G	1.750	16	14	230/1/50	1 1/4	0,9	ECS2010M1G	3/8	5/8	<2,5	8,5	10,5	EEC3002M1G	1.040 - 2.000	28	85
300	ESS3020M5G	3.100	40	32	400/3/50	2	1,5	ECS3020M5G	3/8	3/4	<4	5,2	8,9	EEC3003M1G	1.590 - 3.000	30	110
400	ESS4025M5G	4.300	65	50	400/3/50	2 1/2	1,7	ECS4025M5G	1/2	3/4	<5,5	5,4	8,5	EEC2206M1G	4.540 - 3.200	32	155
	ESS4030M5G	5.020	86	67	400/3/50	3	2,2	ECS4030M5G	1/2	3/4	<4,5	6,4	8,6	EEC2236M1G	3.220 - 5.490	32	155
500	ESS5040M5G	7.150	130	100	400/3/50	4	3	ECS5040M5G	1/2	7/8	<8	7,3	12	EEC2316M1G	4.540 - 5.600	32	180




i If the equipment is to operate in a working range between 0 and -5 °C, it will be necessary to include a drain resistor. (Consult the technical office).

-20 °C -25 °C ÷ -15 °C		Refrigeration capacity	°C EXT	°C EXT		Compressor		Model UC.	Liq	Suct	R-455A	Nominal consumption	Max. load current	Evap. model	Flow	Noise level	Weight
Series	Model	W	m³	m³		HP	kW				kg	A	A		m³/h	dBA	kg
100	ESS1010L1G	850	5	4	230/1/50	3/4	0,5	ECS1010L1G	3/8	5/8	<2	5,0	7,2	EEC3001L1G	730 - 1.300	28	60
200	ESS2015L1G	1.350	15	10	230/1/50	1 3/4	1,3	ECS2015L1G	3/8	5/8	<2,5	7,3	10,7	EEC3002L1G	1.040 - 3.000	30	90
300	ESS3020L5G	2.375	29	21	400/3/50	2 1/2	1,8	ECS3020L5G	3/8	3/4	<4	5,9	7,8	EEC3003L1G	1.590 - 4.000	32	115
400	ESS4030L5G	2.840	36	28	400/3/50	3	2,2	ECS4030L5G	1/2	3/4	<5,5	6,5	11,6	EEC2156L1G	4.540 - 3.670	32	150
	ESS4040L5G	3.605	47	34	400/3/50	4	3	ECS4040L5G	1/2	3/4	<5,5	8,6	13,8	EEC2236L1G	4.540 - 3.200	32	155
500	ESS5050L5G	4.325	76	56	400/3/50	5	3,7	ECS5050L5G	1/2	7/8	<5,5	9,8	16,8	EEC2236L1G	4.540 - 5.490	32	170
	ESS5060L5G	5.300	111	77	400/3/50	6	4,7	ECS5060L5G	1/2	1 1/8	<5,5	11,5	20,5	EEC2316L1G	4.540 - 5.600	32	200

DIMENSIONS

Series	COND.						EVAP.				
	A	B	C	D1	D2	Model	A	B	C	D1	D2
100	405	460	755	338	390	1M	250	500	820	570	440
200	500	570	950	570	500	2M	250	500	1.200	950	440
300	500	610	955	570	500	3M	280	500	1.690	1.420	440
400	665	670	1.030	455	570	L403	440	450	1.145	925	410
						L404	440	450	1.145	1.375	410
						M425-30	440	450	1.145	1.375	410
500	915	750	1.050	480	630	L505	440	450	1.595	1.375	410
						L506	565	490	1.565	1.345	450
						M5	565	490	1.565	1.345	450

Series	U.C + EMB./PACK.				kg	Model	EVAP.+EMB./PACK.				kg
	A	B	C				A	B	C		
100	785	480	420	60	1M	300	530	1.015	25		
200	876	640	985	75	2M	300	530	1.395	35		
300	876	640	985	90	3M	330	535	1.980	50		
400	1.126	740	1.070	130	L403	530	530	1.180	35		
					L404	530	530	1.180	40		
					M425-30	530	530	1.180	40		
500	1.136	1.000	1.350	180	L505	530	530	1.630	50		
				210	L506	655	570	1.600	55		
					M5	655	570	1.600	55		

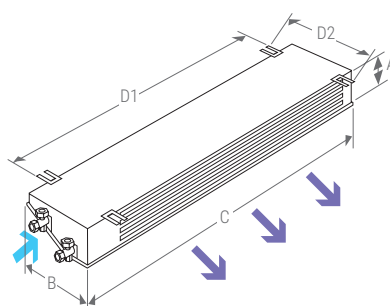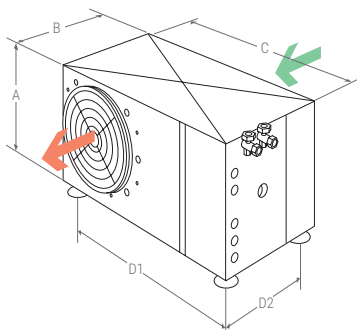



12 °C



COMMERCIAL EQUIPMENT

WORK ROOMS

ESS



Silent split refrigeration units specially designed for food handling and processing rooms, antechambers and loading areas, for use in high temperature applications.



R-455A
R-454C



GENERAL CHARACTERISTICS

- Pre-charged with refrigerant (Max. length 10 m).
- Hermetic compressor / scroll.
- Service valves (Series 100 - 200 - 300).
- Liquid receiver.
- Ceramic filter dryer.
- Liquid sight glass.
- High and low pressure switch.
- Condensation control by pressure switch.
- Probe alert "dirty condenser".
- Thermostatic expansion valve in the evaporator.
- Solenoid valve is shipped loose for fitting to the evaporator.
- Automatic air defrosting.
- Double flow type evaporator with nitrogen with low air flow.
- Electrical supply cable (3 m) (Series 100 - 200 - 300).
- Electrical interconnection (3) evaporator (10 m) (Series 100 - 200 - 300).
- Remote multifunctional electronic control (5 m) (Series 100 - 200 - 300).
- Cable for light (3 m) (Series 100-200-300).
- Voltage protector in three-phase version.
- Air extraction fan.
- Watertight electrical panel.
- Oversized condenser coil with low speed fans.
- Liquid injection in 400-500 series.

OPTIONS

- Winter Kit.
- Rotation / failure system for two units.
- Synchronized defrost system for two units.
- Built-in condensate pump on double-flow evaporators (max. Pumping head 1,5 m).
- Anti-corrosion treatment on condenser / evaporator coil.
- Oil separator .
- Voltage protector (single-phase version).
- Time control.
- Humidifier external to the equipment and control.
- Anti-corrosive treatment for the condenser unit furniture.
- Monitoring and control system. See page 69.

ELECTRONIC CONTROLLER

KIDE-Split units incorporate the advanced XW60K-2DI electronic controller as standard.

- Temperature control with maximum and minimum temperature recordings.
- "Jet Cool" function for rapid cooling
- Intelligent defrost.






12 °C +10°C ÷ 15 °C		Refrige- ration capacity	°C EXT	°C EXT		Compressor		Model UC.	Liq	Suct	R-455A	Nominal consump- tion	Max. load current	Evap. model	Flow	Noise level	Weight
Series	Model																
		W	m³	m³		HP	kW				kg	A	A		m³/h	dBA	kg
200	ESS2007H1G	2.130	27	20	230/1/50	3/4	0,5	ECS2007H1G	3/8	1/2	2,4	4,9	7,1	EEP4084W1G	1.040 - 1.590	25	100
300	ESS3008H1G	2.810	41	30	230/1/50	1	0,7	ECS3008H1G	3/8	1/2	3	6,1	8,9	EEP4094W1G	1.200 - 1.380	28	110
400	ESS4015H1G	3.850	56	45	230/1/50	1 1/2	1,1	ECS4015H1G	1/2	5/8	3,7	9,7	14	EEP4154W1G	3.220 - 1.380	30	135
	ESS4020H5G	4.940	88	72	400/3/50	2	1,5	ECS4020H5G	1/2	3/4	3,7	4,8	8,5	EEP4154W1G	3.220 - 3.180	30	135
500	ESS5030H5G	6.690	128	103	400/3/50	3	2,2	ECS5030H5G	1/2	3/4	4	6,5	11,4	EEP4214W1G	5.200 - 2.400	32	155

DIMENSIONS

COND.							EVAP.				
Series	A	B	C	D1	D2	Model	A	B	C	D1	D2
200	500	570	950	570	500	EEP4084	284	853	796	582	810
300	500	610	955	570	500	EEP4094	310	853	796	582	810
400	665	670	1.030	455	570	EEP4154	307	853	1.612	1.382	810
						EEP4154	307	853	1.612	1.382	810
500	750	1.050	480	630	500	EEP4214	310	848	1.900	1.731	790

	U.C + EMB./PACK.					EVAP.+EMB./PACK.				
Series	A	B	C	kg	Model	A	B	C	kg	
200	876	640	985	75	EEP4084	315	940	1.330	32	
300	876	640	985	90	EEP4094	315	940	1.330	35	
400	1.126	640	1.070	130	EEP4094	315	940	1.330	35	
	1.126	640	1.070	130	EEP4154	315	940	1.330	55	
500	1.136	1.000	1.350	180	EEP4214	315	940	1.730	65	

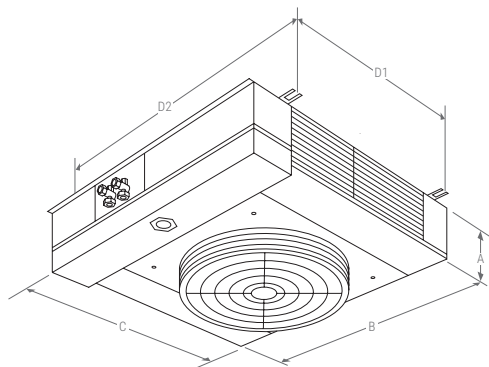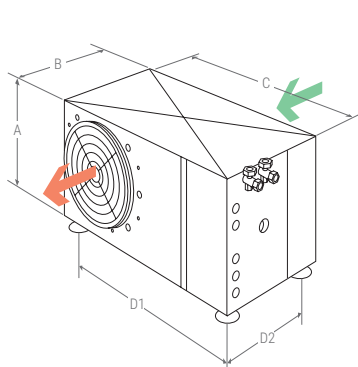

kide**SPLIT****-20 °C****0 °C****COMMERCIAL EQUIPMENT****SILENT SPLIT****ESS**

Silent commercial split refrigeration units for small and medium volume cold storage rooms in medium and low temperature applications.

**GENERAL CHARACTERISTICS**

- Pre-charged with refrigerant R-449A (Max. length 10 m).
- Scroll compressor in the three-phase units soundproof compartment and separated from the air flow.
- Hermetic compressor on single phase units.
- Low temperature with liquid injection in scroll compressor units.
- Oversized condenser coil with low speed fans.
- Service valves (Series 100 - 200 - 300).
- Liquid receiver.
- Ceramic filter dryer.
- Liquid sight glass.
- High and low pressure switch.
- Condensation control by pressure switch.
- Probe alert "dirty condenser".
- Thermostatic expansion valve in the evaporator.
- Solenoid valve in the evaporator.
- Automatic defrosting by heating element.
- Draiante heating element in low T^a (2 m).
- Ceiling type evaporator with nitrogen (Series 100 - 200 - 300).
- Cubic evaporator with nitrogen (Series 400 - 500).
- Electrical supply cable (3 m) (Series 100 - 200 - 300).
- Electrical interconnection (2) evaporator (10 m) (Series 100 - 200 - 300).
- Remote multifunctional electronic control (5 m) (Series 100 - 200 - 300).
- Cable for light (3 m) (Series 100-200-300).
- Voltage protector.
- Magneto thermic protection (three-phase units).
- Liquid injection in 400-500 series.

OPTIONS

- Winter Kit.
- Rotation / failure system for two units.
- Synchronized defrost system for two units.
- Anti-corrosion treatment on condenser / evaporator coil.
- Oil separator (except serie 100).
- Voltage protector (single-phase version).
- Time control.
- Humidifier external to the equipment and control (cooling).
- Cubic evaporator (100-200-300 series).
- Other voltages and 60 Hz. Request.
- Anti-corrosive treatment for the condenser unit furniture
- Monitoring and control system. See page 69.

ELECTRONIC CONTROLLER

KIDE-Split units incorporate the advanced XW60K-2DI electronic controller as standard.

- Temperature control with maximum and minimum temperature recordings.
- "Jet Cool" function for rapid cooling
- Intelligent defrost.

Xweb

CALCULATION BASIS - Pag. 168

0 °C -5 °C ÷ 10 °C		Refrigeration capacity	°C EXT	°C EXT		Compressor		Model UC.	Liq	Suct	R-449A	Nominal consumption	Max. load current	Evap. model	Flow	Noise level	Weight
Series	Model	W	m³	m³		HP	kW				kg	A	A				
100	ESS1007M1X	1.340	12	9	230/1/50	3/4	0,5	ECS1007M1X	3/8	1/2	<2	4,3	5,7	EEC3001M1X	1.000	25	60
200	ESS2010M1X	1.975	20	17	230/1/50	1 1/4	0,9	ECS2010M1X	3/8	5/8	<2,5	7,4	9,6	EEC3022M1X	2.000	28	85
300	ESS3020M5X	3.540	45	37	400/3/50	2	1,5	ECS3020M5X	3/8	3/4	<4	5,2	8,9	EEC3003M1X	3.000	30	110
400	ESS4025M5X	4.250	65	50	400/3/50	2 1/2	1,7	ECS4025M5X	1/2	3/4	<4,5	5,4	8,5	EEC2206M1X	3.200	32	150
	ESS4030M5X	4.950	86	67	400/3/50	3	2,2	ECS4030M5X	1/2	3/4	<4,5	6,4	8,6	EEC2236M1X	5.490	32	155
500	ESS5040M5X	7.400	135	105	400/3/50	4	3	ECS5040M5X	1/2	7/8	<5,5	7,3	12	EEC2316M1X	5.600	32	180






If the equipment is to operate in a working range between 0 and -5 °C, it will be necessary to include a drain resistor. (Consult the technical office).

-20 °C -25 °C ÷ -15 °C		Refrigeration capacity	°C EXT	°C EXT		Compressor		Model UC.	Liq	Suct	R-449A	Nominal consumption	Max. load current	Evap. model	Flow	Noise level	Weight
Series	Model	W	m³	m³		HP	kW				kg	A	A				
100	ESS1010L1X	950	6	5	230/1/50	1	0,7	ECS1010L1X	3/8	5/8	<2	4,7	6,3	EEC3001L1X	1.300	28	60
200	ESS2015L1X	1.280	11	8	230/1/50	1 1/2	1,1	ECS2015L1X	3/8	5/8	<2,5	6,5	9,4	EEC3002L1X	3.000	30	90
300	ESS3020L5X	1.790	22	15	400/3/50	2	1,5	ECS3020L5X	3/8	3/4	<4	5,5	7,8	EEC3003L1X	4.000	32	115
400	ESS4030L5X	2.775	35	28	400/3/50	3	2,2	ECS4030L5X	1/2	3/4	<4,5	6,5	11,6	EEC2156L1X	3.670	32	155
	ESS4040L5X	3.425	52	40	400/3/50	4	2,9	ECS4040L5X	1/2	3/4	<4,5	8,6	13,8	EEC2236L1X	5.490	32	160
500	ESS5050L5X	4.325	76	56	400/3/50	5	3,7	ECS5050L5X	1/2	7/8	<5,5	9,8	16,7	EEC2236L1X	5.490	32	170
	ESS5060L5X	5.300	111	77	400/3/50	6	4,5	ECS5060L5X	1/2	1 1/8	<5,5	11,5	20,5	EEC2316L1X	5.600	32	200

DIMENSIONS

Series	COND.					Model	EVAP.				
	A	B	C	D1	D2		A	B	C	D1	D2
100	405	460	755	338	390	1L	210	425	920	670	460
						1M	250	500	820	570	440
200	500	570	950	570	500	2L	250	500	1.310	1.050	460
						2M	250	500	1.200	950	460
300	500	610	955	570	500	3L	280	500	1.890	1.620	460
						3M	280	500	1.690	1.420	460
400	665	670	1.030	445	570	L403	440	450	1.145	925	410
						L404	440	450	1.595	1.375	410
						M425-30	440	450	1.145	1.375	410
500	915	750	1.050	480	630	L505	440	450	1.595	1.375	410
						L506	565	490	1.565	1.345	450
						M5	565	490	1.565	1.345	450

Series	U.C + EMB./PACK.				kg	Model	EVAP.+EMB./PACK.				kg
	A	B	C				A	B	C		
100	785	480	420	60		1L	300	530	1.015		25
						1M	300	530	1.015		20
200	876	640	985	75		2L	300	530	1.395		35
						2M	300	530	1.395		30
300	876	640	985	90		3L	330	535	1.980		50
						3M	330	535	1.980		45
400	1.126	740	1.070	130		L403	530	530	1.180		35
						L404	530	530	1.180		40
						M425-30	530	530	1.180		40
500	1.136	1.000	1.350	180		L505	530	530	1.630		50
						L507	655	570	1.600		55
						M5	655	570	1.600		55

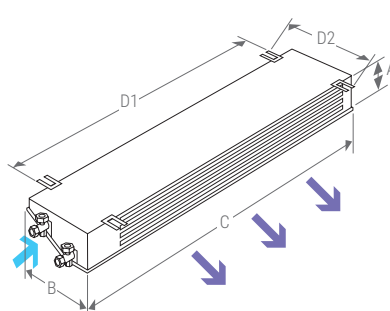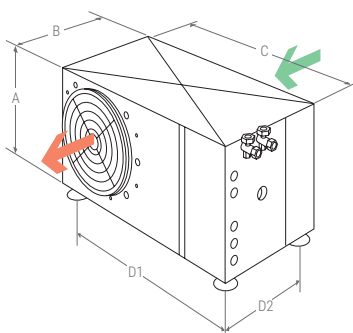



12 °C



COMMERCIAL EQUIPMENT

WORK ROOMS

ESS



R-449A



Silent split refrigeration units specially designed for food handling and processing rooms, antechambers and loading areas, for use in high temperature applications.

GENERAL CHARACTERISTICS

- Pre-charged with refrigerant R-449A (Max. length 10 m).
- Scroll compressor in the three-phase units soundproof compartment and separated from the air flow.
- Hermetic compressor on single phase units.
- Oversized condenser coil with low speed fans.
- Service valves (Series 100 - 200 - 300).
- Liquid receiver.
- Ceramic filter dryer.
- Liquid sight glass.
- High and low pressure switch.
- Condensation control by pressure switch.
- Probe alert "dirty condenser".
- Thermostatic expansion valve in the evaporator.
- Solenoid valve is shipped loose for fitting to the evaporator.
- Automatic air defrosting.
- Low-speed dual discharge evaporator filled with nitrogen (in high temperature).
- Electrical supply cable (3 m) (Series 100 - 200 - 300).
- Electrical interconnection (2) evaporator (10 m) (Series 100 - 200 - 300).
- Remote multifunctional electronic control (5 m) (Series 200 - 300).
- Cable for light (3 m) (Series 200-300).
- Voltage protector.
- Magneto thermic protection (three-phase units).

OPTIONS

- Winter Kit.
- Rotation / failure system for two units.
- Synchronized defrost system for two units.
- Built-in condensate pump on double-flow evaporators (max. Pumping head 1,5 m).
- Anti-corrosion treatment on condenser / evaporator coil.
- Oil separator.
- Voltage protector (single-phase version).
- Time control.
- Humidifier external to the equipment and control.
- Other voltages and 60 Hz. Request.
- Anti-corrosive treatment for the condenser unit furniture.
- Monitoring and control system. See page 69.



ELECTRONIC CONTROLLER

KIDE-Split units incorporate the advanced XW60K-2DI electronic controller as standard.

- Temperature control with maximum and minimum temperature recordings.
- "Jet Cool" function for rapid cooling
- Intelligent defrost.






CALCULATION BASIS - Pag. 168

12 °C +10°C ÷ 15 °C		Refrige- ration capacity	°C EXT	°C EXT		Compressor		Model UC.	Liq	Suct	R-449A	Nominal consump- tion	Max. load current	Evap. model	Flow	Noise level	Weight
Series	Model																
		W	m³	m³		HP	kW				kg	A	A		m³/h	dBA	kg
200	ESS2007H1X	1.900	22	17	230/1/50	3/4	0,5	ECS2007H1X	3/8	1/2	<2,5	4,3	5,6	EEP4084W1X	1.040 - 1.590	25	100
300	ESS3008H1X	2.400	29	25	230/1/50	1	0,7	ECS3008H1X	3/8	1/2	<4	5,4	6,8	EEP4094W1X	1.590 - 1.590	28	110
400	ESS4015H1X	3.300	48	36	230/1/50	1 1/2	1,1	ECS4015H1X	1/2	5/8	<4	8,9	10,7	EEP4154W1X	1.200 - 1.380	29	135
	ESS4020H5X	5.100	96	76	400/3/50	2	1,5	ECS4020H5X	1/2	3/4	<4	4,8	8,5	EEP4154W1X	3.220 - 3.180	30	135
500	ESS5030H5X	6.850	135	108	400/3/50	3	2,2	ECS5030H5X	1/2	3/4	<4	6,5	11,4	EEP4214W1X	3.220 - 3.180	32	155

DIMENSIONS

Series	COND.						EVAP.				
	A	B	C	D1	D2	Model	A	B	C	D1	D2
200	500	570	950	570	500	EEP4084	284	853	796	582	810
300	500	610	955	570	500	EEP4094	310	853	796	582	810
400	670	620	1.040	500	500	EEP4154	307	853	1.612	1.382	810
	670	620	1.040	500	500	EEP4154	307	853	1.612	1.382	810
500	950	600	1.040	500	500	EEP4214	310	848	1.900	1.731	790

Series	U.C + EMB./PACK.				Model	EVAP.+EMB./PACK.			
	A	B	C	kg		A	B	C	kg
200	876	640	985	75	EEP4084	315	940	1.330	32
300	876	640	985	90	EEP4094	315	940	1.330	35
400	1.126	640	1.070	100	EEP4154	315	940	1.330	35
	1.126	640	1.070	100	EEP4154	315	940	1.330	55
500	1.126	640	1.070	100	EEP4214	315	940	1.730	65

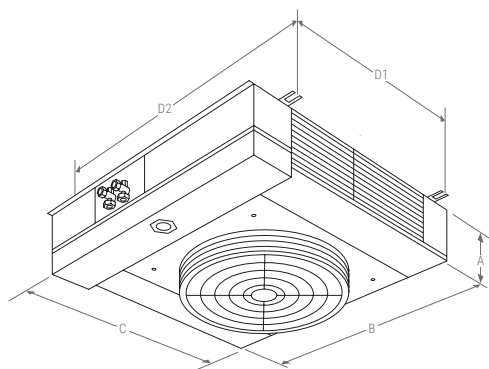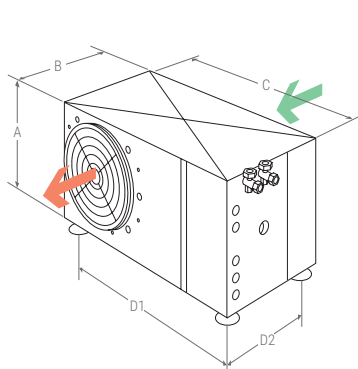

COMMERCIAL EQUIPMENT

EA

ACCESSORIES

Watertight light point with energy-saving LED bulb



Door micro switch



Temperature recorder

For ESP: see our catalogue at
"Alarm and temperature control systems".



Rest. EU

EAR1 (1 serv.)

EAR2 (4 serv. 4 probes included)
(EN 12830)




FOR MORE ACCESSORIES PLEASE
CONTACT KIDE

Tel.: + 34 946 036 200
kide@kide.com

MONITORING AND CONTROL SYSTEM



- Remote monitoring and control system for commercial and industrial refrigeration installations (in real time)



- Based on Web server technology




- Simple, easy installation.



- Compatible with equipment from different manufacturers.



- Complies with Standard EN 12830 for temperature recorders* and HACCP food safety certification.

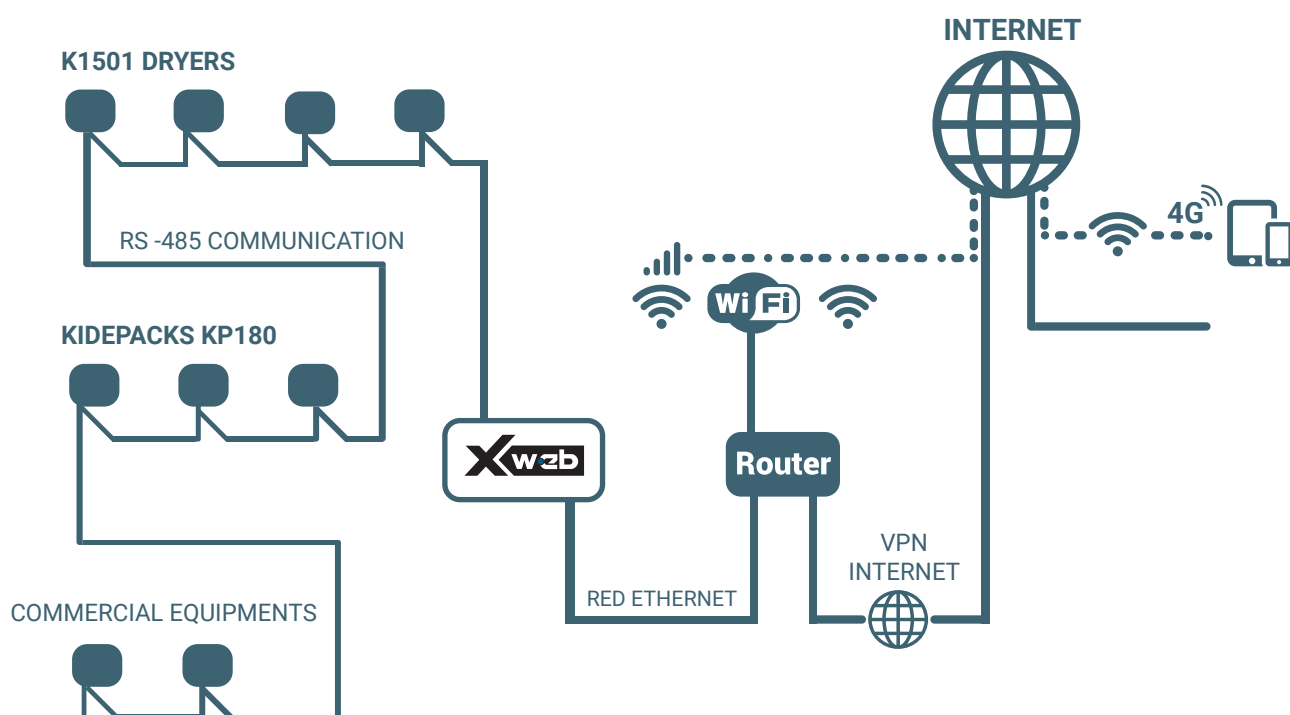

GENERAL CHARACTERISTICS



Management of multiple users with tiered access levels and simultaneous access by multiple users.



Real-time monitoring and remote management of equipment operation.



Responsive web interface for access from PC or mobile devices.



Management of alarms and warnings at different levels. Instant alerts by email and/or SMS.



Storage of historical data (recording of all variables – temperatures, humidity, pressures, machine operating states, etc.) with multivariable graphs (no limit to the number of variables to be graphed).



Generation of HACCP CSV or PDF reports with the data of the desired equipment and the desired time interval.



Available languages:

German	French	Portuguese
Greek	Italian	Turkish
English	Dutch	Russian
Spanish	Polish	Chinese

TECHNOLOGY AT THE SERVICE OF EVERYONE

- Plug & Play installation with 3G/4G, Wi-Fi, Ethernet connectivity.
- Intelligent programming of setpoints and operating status of equipment (switching equipment on or off, forcing defrosting, changing setpoints, etc.).
- Data push - Uploading data to cloud. Possibility of setting up the XWEB to constantly upload data to a server.
- Task-programming calendar: Programming of machine functions, switching on, switching off, defrosting; programming of sending reports via e-mail.
- Consumption and performance analysis of the installation (consumption analysers not included).
- Installation layout: Creation of customised screens tailored to client.

LATEST UPDATES


- Connectivity: Option for Wi-Fi connection (Wi-Fi Dongle).
- Processor: Improved graphics and faster uploads (improvements for the creation of layouts).
- Improved high-speed data acquisition: Improves minimum sampling time and data acquisition accuracy.
- Security: Data encryption and protection against vulnerabilities and cyber-attacks.
- Enhanced alarm delivery: In addition to sending alarms, it is now possible to send a report on the status of the desired variables before and after the alarm occurs.
- Installation layout: Creation of customised screens tailored to client.
- Electrical hardware upgrades. UL compliant.

GENERAL CHARACTERISTICS

Model	Units
EAT300D8D000P000 > XWEB 300 D - PRO 8D000	Up to 18 units
EAT500D8F000P000 > XWEB 500 D - PRO 8F000	Up to 36 units
EAT500D8L000P000 > XWEB 500 D - PRO 8L000	Up to 75 units



i Include a converter TTL-RS 485 for each commercial equipment

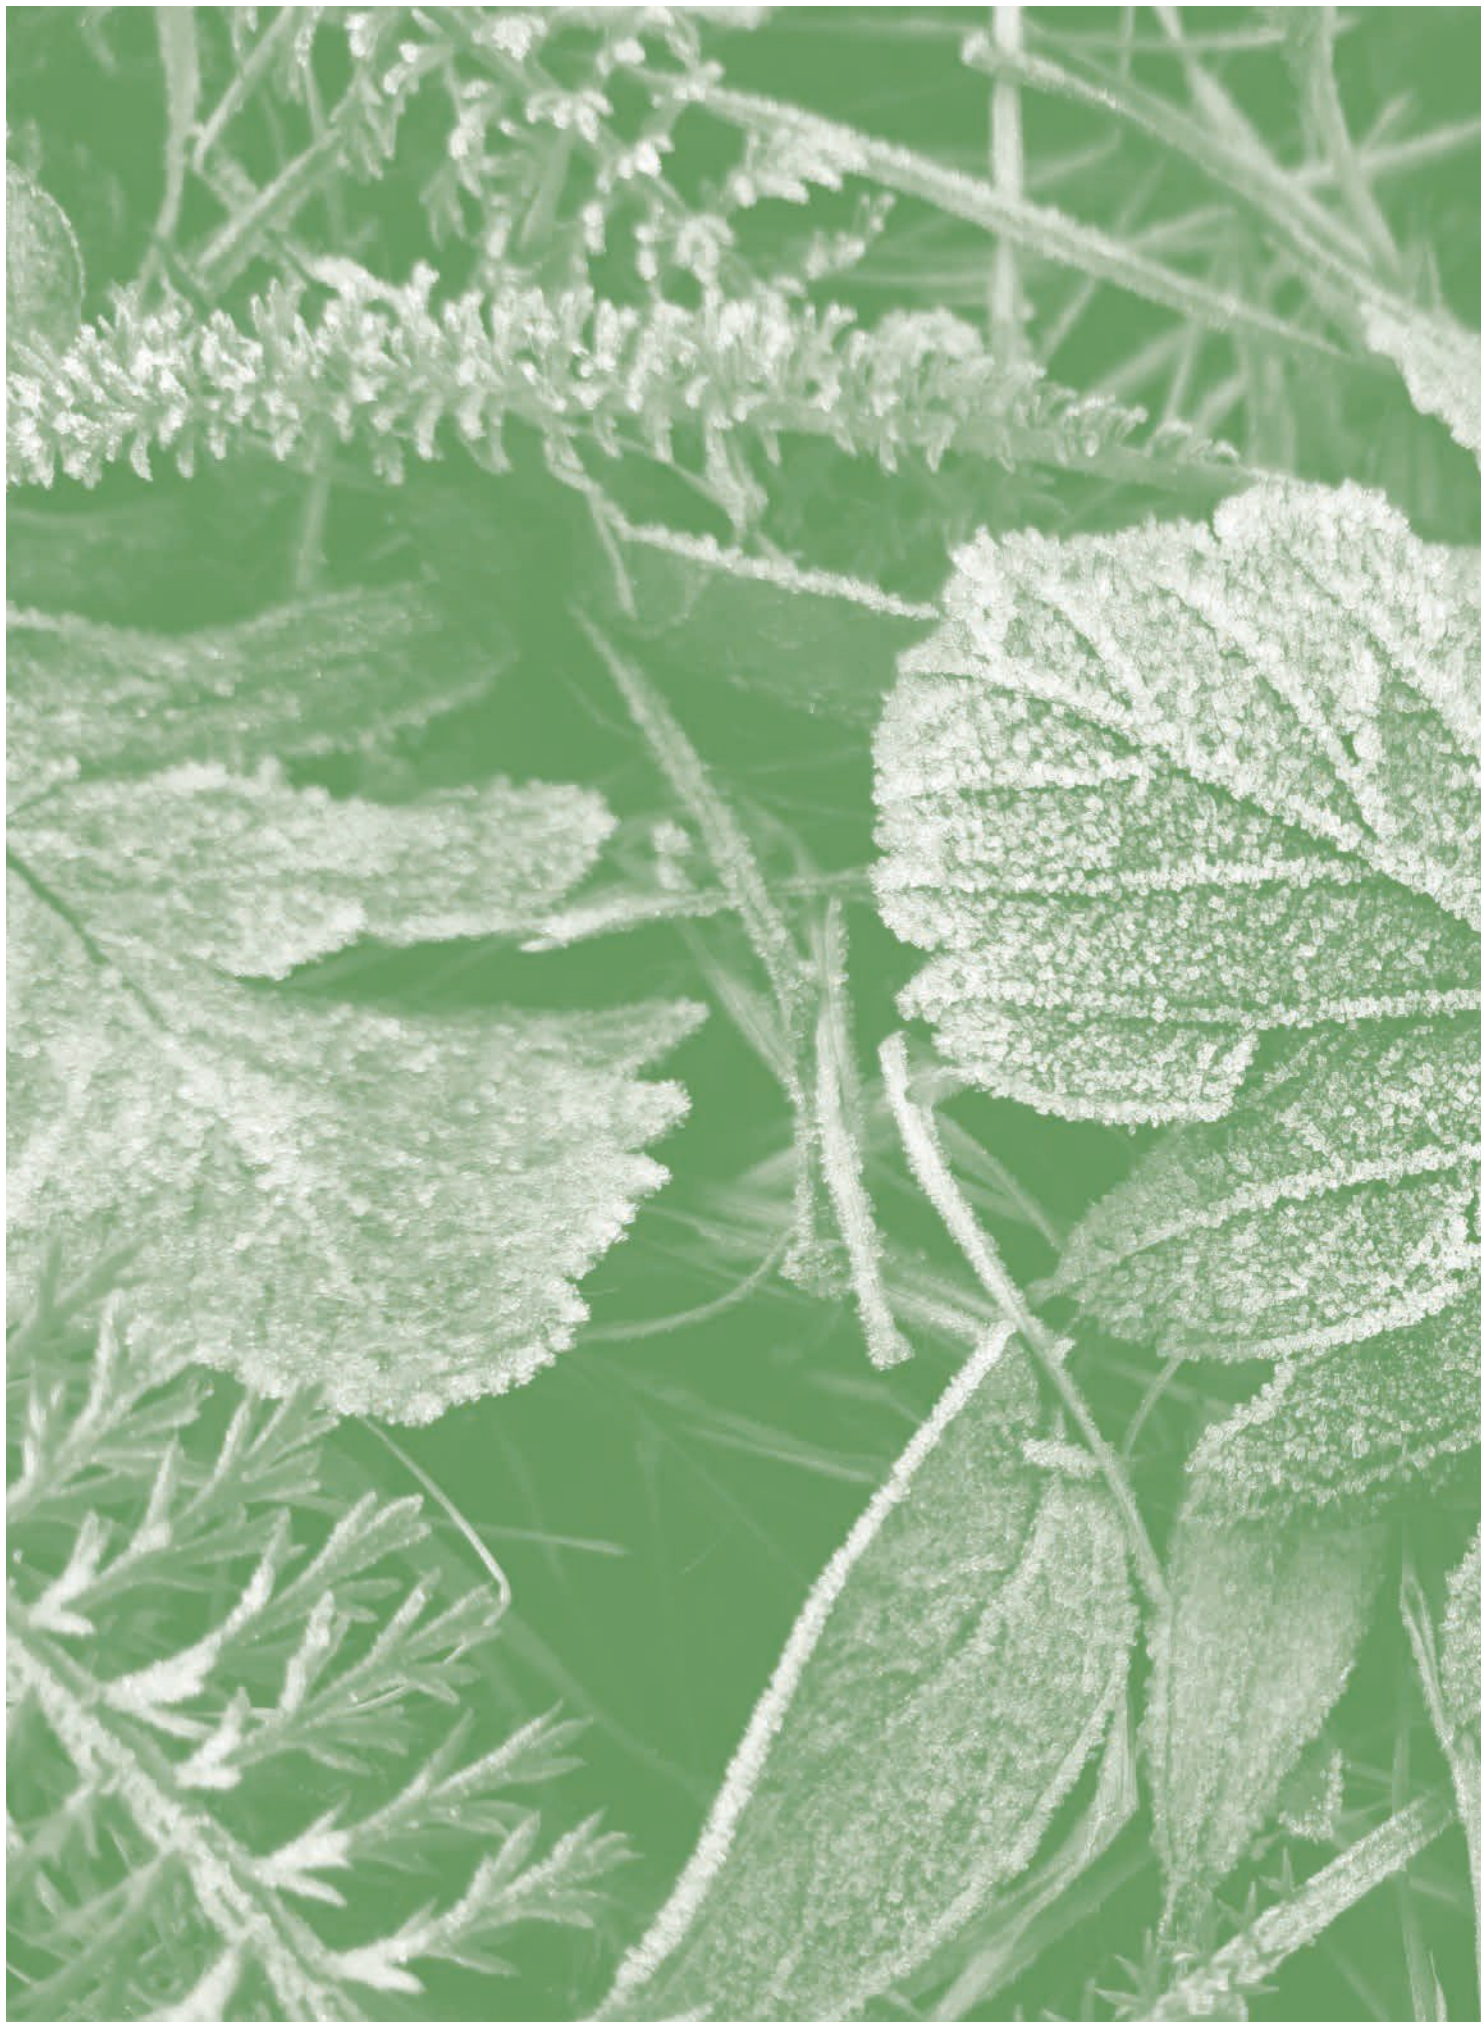



OTHERS

Waterloop system

p. 75 **Compact ceiling-mounted**
[EWR](#) · [R-290](#)

p. 77 **Silent split**
[ESW](#) · [A2L](#)

p. 79 **Silent split**
HIGH TEMPERATURE
[ESW](#) · [A2L](#)

p. 81 **Silent condensing units**
[EWC](#) · [A2L](#)

p. 83 **Silent condensing units**
[EWC](#) · [R-449A](#)

p. 85 **Air coolers with hydraulic
system**
[USI](#)

WATERLOOP SYSTEM

Waterloop is a commercial refrigeration system with indirect condensation. This system consists of refrigeration units condensed in a secondary water + ethylene glycol circuit and one or more air coolers in parallel to evacuate the condensation heat to the outside.

BENEFITS

- Reduces refrigerant charge and results in less leaks.
- Water* or water + 40% ethylene glyco.
- The air cooler's EC variable speed fans achieve energy savings in low outdoor temperatures or low demand.
- Easy to install.
- Distributed refrigeration production makes it possible to adjust the working temperatures to the needs of each service.
- Can be installed in new installations or in existing direct expansion installations.
- Designed to work in outdoor temperatures up to +45 °C.

* Provided that the ambient temperature is above 0°C.




Silent condensing units



Hydraulic system



Air cooler

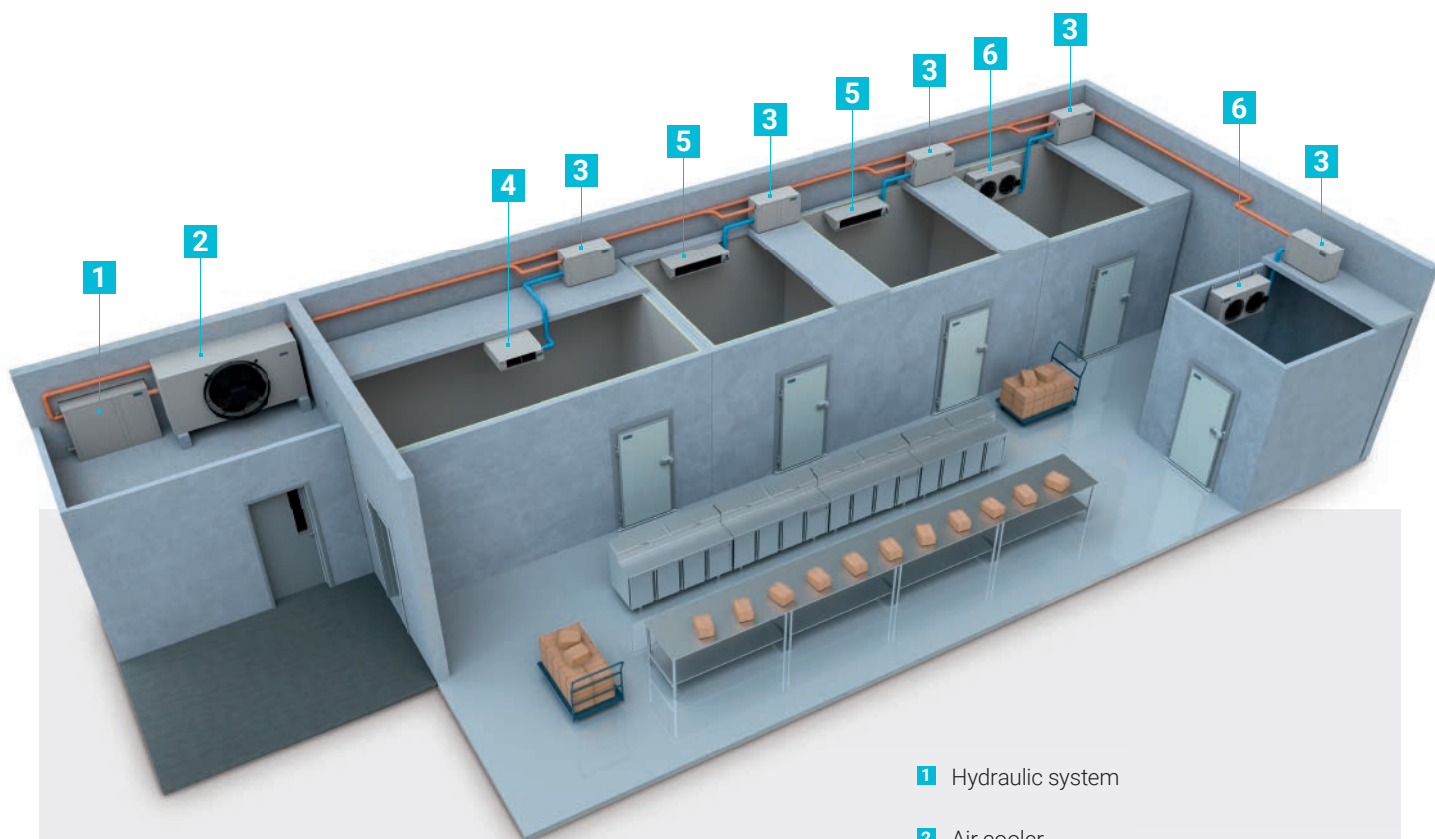

- 1** Hydraulic system
- 2** Air cooler
- 3** Silent condensing units
- 4** Double flow evaporators
- 5** Low-profile evaporators
- 6** Cubic evaporators

WATERLOOP SYSTEM

COMPACT
CEILING-MOUNTED

EWR

Compact commercial ceiling-mounted refrigeration units for small volume, water condensed, cold storage rooms in medium and low temperature applications.

NEW

R-290



GENERAL CHARACTERISTICS

- Pre-charged with refrigerant
- Hermetic compressor.
- Expansion with thermostatic valve.
- High pressure switch.
- Automatic defrosting by hot gas.
- Partial automatic evaporation of condensates.
- Cables for connection, power, and micro door (2,5 m).
- Multifunction electronic regulation with remote control (5 m).
- Watertight light point with low-energy LED bulb.
- Filter dryer.
- Non-bodied condensing unit.
- Evaporator located in a fully sealed and insulated enclosure.
- Optimised high-performance air flow in the evaporator.
- Ceiling-mounted installation.
- Water-cooled condensation.
- Pressure switch valve.

OPTIONS

- Winter Kit.
- Alternation / failure system for two units.
- Synchronised defrosting system for two units.
- Anti-corrosion treatment on evaporator coil.
- Refrigeration unit with housing
- Voltage protector.
- Time control.
- Humidifier external to the equipment and control (cooling).
- Monitoring and control system. See page 69.

Xwzb

ELECTRONIC CONTROLLER

KIDE-Split units incorporate the advanced XW60K-2DI electronic controller as standard.

- Temperature control with maximum and minimum temperature recordings.
- "Jet Cool" function for rapid cooling
- Intelligent defrost.



0 °C -5 °C ÷ 10 °C		Refrigeration capacity	°C EXT	°C EXT		Compressor		R-290	Nominal consumption	Max. load current	Flow	Noise level	Weight
											Evapora.		
Series	Model	W	m³	m³		HP	kW	kg	A	A	m³/h	dBA	kg
000	NEW EWR0004M1P	635	5	4	230/1/50	1/3	0,25	0,1	2,4	2,9	650	30	65
100	NEW EWR1006M1P	1.050	9	7	230/1/50	1/2	0,4	0,15	2,5	3,4	880	30	65
	NEW EWR1007M1P	1.340	12	9	230/1/50	3/4	0,5	0,16	3,3	4,4	880	30	65
200	NEW EWR2010M1P	1.825	17	15	230/1/50	1 1/4	0,9	0,17	6,1	7,6	1.250	30	95
	NEW EWR2015M1P	2.300	27	23	230/1/50	1 1/2	1,1	0,2	6,7	8,9	1.225	30	95
	NEW EWR2020M1P	2.750	36	28	230/1/50	1 3/4	1,3	0,3	8,6	11,2	1.225	30	95





-20 °C -15 °C ÷ -25 °C		Refrigeration capacity	°C EXT	°C EXT		Compressor		R-290	Nominal consumption	Max. load current	Flow	Noise level	Weight
											Evapora.		
Series	Model	W	m³	m³		HP	kW	kg	A	A	m³/h	dBA	kg
000	NEW EWR0004L1P	440	3	2	230/1/50	1/2	0,4	0,1	2,3	3	675	30	65
100	NEW EWR1010L1P	660	4	3	230/1/50	3/4	0,5	0,15	2,7	3,6	880	30	65
	NEW EWR1015L1P	920	6	5	230/1/50	1 1/4	0,9	0,15	4,2	5,8	880	30	65
200	NEW EWR2015L1P	1.280	11	8	230/1/50	1 1/2	1,1	0,15	5,2	6,7	1.250	30	95
	NEW EWR2020L1P	1.400	15	10	230/1/50	1 3/4	1,3	0,3	5,9	8,2	1.250	30	95
300	NEW EWR3215L1P	1.840	18	16	230/1/50	(2) 1 1/4	(2) 0,9	2x0,2	10,1	15,9	3.300	40	125
	NEW EWR3225L1P	2.560	34	26	230/1/50	(2) 1 1/2	(2) 1,1	2x0,18	11,7	18,5	3.300	40	125

DIMENSIONES

Unit			
Series	A	B	C
000	400	570	915
100	400	695	1.050
200	500	950	1.172
300	500	950	1.210

Cut	
H	L
490	405
615	405
865	405
865	405

Unit + EMB. / PACK.			
A	B	C	kg
1.136	1.000	1.350	80
1.136	1.000	1.350	80
1.136	1.000	1.350	170
1.136	1.000	1.350	170

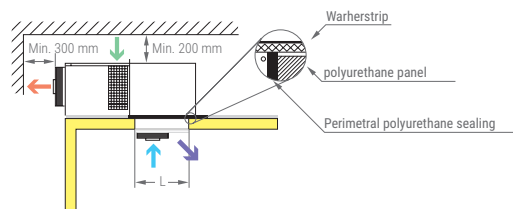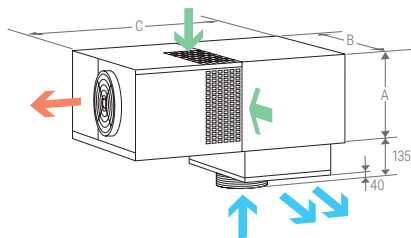

kide**WATERLOOP****-20 °C****0 °C****WATERLOOP SYSTEM****SILENT SPLIT****ESW****SILENT**

Commercial split water condensed refrigeration units for small volume cold storage rooms in medium and low temperature applications.

**GENERAL CHARACTERISTICS**

- Pre-charged with refrigerant.
- Water* or water + 30% ethylene glycol.
- Power supply 230 V-I-50 Hz or 400 V-III-50 Hz (Other voltages, please enquire).
- Hermetic scroll compressor on anti-vibration mounts.
- Liquid injection in low-temperature models.
- Condensation by plate heat exchanger.
- Liquid receiver.
- Ceramic filter dryer.
- Liquid sight glass.
- High and low pressure switches.
- Service valves (200 series).
- Pressure switch valve.
- Hydraulic condensation circuit in copper pipe with threaded connections.
- Electrical control panel with differential and magnetothermal protection.
- Electronic regulation with remote control

- of the evaporator and compressor, with a temperature sensor.
- Air extraction fan.
- Watertight electrical panel.
- Low profile / cubic evaporator with nitrogen (depending on model capacities).
- Electric defrosting.

* Provided that the ambient temperature is above 0 °C.

OPTIONS

- Winter Kit.
- Alternation / failure system for two units.
- Synchronised defrosting system for two units.
- Voltage protector (single-phase version).
- Anti-corrosion treatment on evaporator coil.
- Time control.
- Cubic evaporator for EEC3 models.
- Humidifier external to the equipment and control (cooling).
- Anti-corrosive treatment for the condenser unit furniture.
- Monitoring and control system. See page 69.

Xweb**ELECTRONIC CONTROLLER**

KIDE-Split units incorporate the advanced XW60K-2DI electronic controller as standard.

- Temperature control with maximum and minimum temperature recordings.
- "Jet Cool" function for rapid cooling
- Intelligent defrost.



0 °C -5 °C ÷ 10 °C		Refrigeration capacity	°C EXT	°C EXT		Compressor		Model UC.	Liq	Suct	R-455A	Nominal consumption	Max. load current	Evap. model	Flow	Noise level	Weight
Series	Model	W	m³	m³		HP	kW				kg	A	A		Evapora.	dBA	kg
200	NEW ESW2010M1G	1.750	16	14	230/1/50	1 1/4	0,9	ECW2010M1G	3/8"	1/2"	0,96	8,3	10,2	EEC3022M1G	2.000	25	105
	NEW ESW2015M1G	2.460	30	25	230/1/50	1 1/2	1,1	ECW2015M1G	3/8"	5/8"	0,96	11,4	14	EEC3003M1G	3.000	25	120
	NEW ESW2020M5G	3.100	40	32	400/3/50	2	1,5	ECW2020M5G	3/8"	5/8"	1,67	4,5	6,0	EEC3003M1G	3.000	25	120
	NEW ESW2025M5G	4.300	65	50	400/3/50	2 1/4	1,7	ECW2025M5G	3/8"	5/8"	1,67	5,0	7,8	EEC2206M1G	3.200	29	120
	NEW ESW2030M5G	5.020	86	67	400/3/50	3	2,2	ECW2030M5G	3/8"	3/4"	2,45	5,8	8,4	EEC2236M1G	5.490	29	130
	NEW ESW2035M5G	6.010	106	85	400/3/50	3 1/2	2,6	ECW2035M5G	3/8"	3/4"	2,45	6,2	9,9	EEC2236M1G	5.490	29	130
	NEW ESW2040M5G	7.150	130	100	400/3/50	4	3	ECW2040M5G	3/8"	3/4"	2,55	7,0	11,3	EEC2316M1G	5.600	29	135
300	NEW ESW3050M5G	8.010	170	140	400/3/50	5	3,7	ECW3050M5G	1/2"	7/8"	4,1	7,4	13,2	EEC2316M1G	5.600	29	160
400	NEW ESW4065M5G	10.740	210	185	400/3/50	6 1/2	4,8	ECW4065M5G	1/2"	1 1/8"	4,2	9,5	16,8	UEC2416M5G	8.540	29	180


i If the equipment is to operate in a working range between 0 and -5 °C, it will be necessary to include a drain resistor. (Consult the technical office).

-20 °C -15 °C ÷ -25 °C		Refrigeration capacity	°C EXT	°C EXT		Compressor		Model UC.	Liq	Suct	R-455A	Nominal consumption	Max. load current	Evap. model	Flow	Noise level	Weight
Series	Model	W	m³	m³		HP	kW				kg	A	A		Evapora.	dBA	kg
200	NEW ESW2020L5G	2.380	28	24	400/3/50	2 1/2	1,8	ECW2020L5G	3/8"	5/8"	1,6	5,5	6,9	EEC3003L1G	4.000	25	120
	NEW ESW2030L5G	2.840	36	28	400/3/50	3	2,2	ECW2030L5G	3/8"	3/4"	1,65	5,2	10,9	EEC2156L1G	3.670	29	105
300	NEW ESW3040L5G	3.610	52	40	400/3/50	4	3	ECW3040L5G	3/8"	3/4"	2,4	7,9	13,6	EEC2236L1G	5.490	29	150
	NEW ESW3050L5G	4.330	66	51	400/3/50	5	3,7	ECW3050L5G	1/2"	7/8"	2,5	8,6	16,0	EEC2236L1G	5.490	29	150
400	NEW ESW4060L5G	5.300	111	77	400/3/50	6	4,7	ECW4060L5G	1/2"	1 1/8"	2,5	10,5	19,8	EEC2316L1G	5.600	29	155
	NEW ESW4075L5G	6.800	130	105	400/3/50	7 1/2	6,2	ECW4075L5G	1/2"	1 3/8"	2,6	14,0	24,2	EEC2316L1G	5.600	29	155

DIMENSIONS

	COND.						EVAP.				
Series	A	B	C	D1	D2	Model	A	B	C	D1	D2
200	538	359	833	479	375	EEC3022M1G	250	500	1.200	570	440
						EEC3003M1G	280	500	1.690	1.420	560
						EEC3003L1G	280	440	1.690	1.420	500
						EEC2156L1G	440	410	1.145	925	450
						EEC2206M1G	440	410	1.145	925	450
						EEC2236M1G	440	410	1.595	1.375	450
						EEC2316M1G	565	490	1.565	1345	450
300	579	484	943	572	500	EEC2236L1G	440	410	1.595	1.375	450
						EEC2316M1G	565	490	1.565	1.345	450
400	677	484	943	572	500	UEC2316L1G	565	450	1.565	1.345	450
						UEC2416M1G	565	450	1.565	1.345	450

U.C + EMB./PACK.				kg	EVAP.+EMB./PACK.				kg
Series	A	B	C		Model	A	B	C	
200	880	640	980	80	EEC3022M1G	300	530	1.395	35
					EEC3003M1G	330	535	1.980	50
					EEC3003L1G	330	535	1.980	50
					EEC2156L1G	530	530	1.180	35
					EEC2206M1G	530	530	1.180	40
					EEC2236M1G	530	530	1.630	38
					EEC2316M1G	655	580	1.600	55
300	970	780	1.105	110	EEC2236L1G	520	580	1.630	55
					EEC2316M1G	655	580	1.600	55
400	970	780	1.105	110	UEC2316L1G	655	580	1.600	55
					UEC2416M1G	655	580	1.600	80

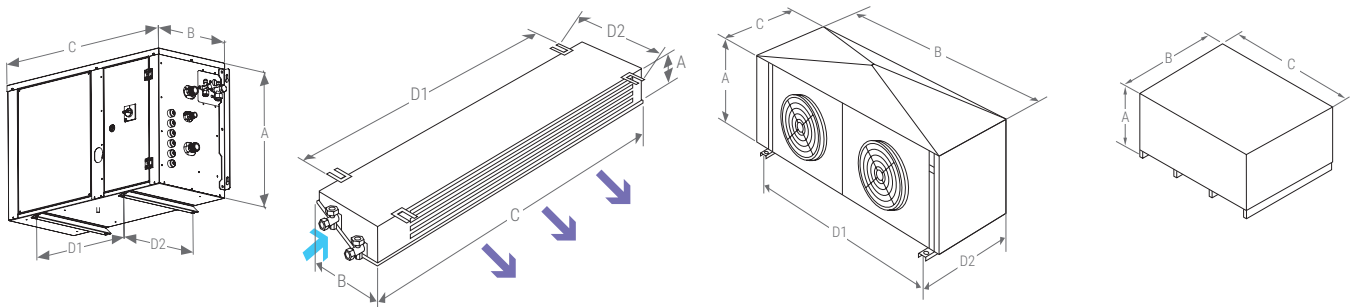

REFRIGERATOR SCHEME see page 82

kide**WATERLOOP**

12 °C

WATERLOOP SYSTEM**WORK ROOMS****ESW**HIGH
TEMPERATURE

SILENT

Commercial split water condensed refrigeration units for small volume cold storage rooms in high temperature applications.

NEWR-455A
R-454C**A2L**

GENERAL CHARACTERISTICS

- Pre-charged with refrigerant.
- Water* or water + 30% ethylene glycol.
- Power supply 230 V-I-50 Hz or 400 V-III-50 Hz (Other voltages, please enquire).
- Hermetic scroll compressor on anti-vibration mounts.
- Stainless steel welded plate condenser.
- Liquid receiver.
- Ceramic filter dryer.
- Liquid sight glass.
- High and low pressure switches.
- Service valves (200 series).
- Pressure switch valve.
- Hydraulic condensation circuit in copper pipe with threaded connections.
- Electrical control panel with differential and magnetothermal protection.
- Electronic regulation with remote control of the evaporator and compressor, with a temperature sensor.
- Air extraction fan.
- Watertight electrical panel.
- Double flow type evaporator with nitrogen with low air flow.
- Air defrosting.

* Provided that the ambient temperature is above 0 °C.

OPTIONS

- Winter Kit.
- Alternation / failure system for two units.
- Synchronised defrosting system for two units.
- Evaporator condensate pump.
- Anti-corrosion treatment on evaporator coil.
- Voltage protector (single-phase version).
- Time control.
- Humidifier external to the equipment and control.
- Anti-corrosive treatment for the condenser unit furniture.
- Monitoring and control system. See page 69.

ELECTRONIC CONTROLLER

KIDE-Split units incorporate the advanced XW60K-2DI electronic controller as standard.

- Temperature control with maximum and minimum temperature recordings.
- "Jet Cool" function for rapid cooling
- Intelligent defrost.




**Xwzb**

12 °C +10°C ÷ 15 °C		Refrigeration capacity	°C EXT	°C EXT		Compressor		Model UC.	Liq	Suct	R-455A	Nominal consumption	Max. load current	Evap. model	Flow	Noise level	Weight
Series	Model	W	m³	m³		HP	kW				kg	A	A		m³/h	dBA	kg
200	NEW ESW2007H1G	2.130	27	20	230/1/50	3/4	0,5	ECW2007H1G	3/8"	1/2"	0,96	4,7	6,9	EEP4084W1G	1.625	25	105
	NEW ESW2008H1G	2.810	41	30	230/1/50	1	0,7	ECW2008H1G	3/8"	1/2"	0,96	5,8	8,6	EEP4094W1G	1.380	25	105
	NEW ESW2015H1G	3.850	56	45	230/1/50	1 1/2	1,1	ECW2015H1G	3/8"	5/8"	1	10,7	13,2	EEP4154W1G	3.200	25	125
	NEW ESW2020H5G	4.940	86	67	400/3/50	2	1,5	ECW2020H5G	3/8"	5/8"	1,7	3,7	5,2	EEP4154W1G	3.200	25	125
	NEW ESW2030H5G	6.690	125	95	400/3/50	3	2,2	ECW2030H5G	3/8"	3/4"	2,45	5,3	7,9	EEP4214W1G	4.700	29	135
	NEW ESW2035H5G	8.613	175	135	400/3/50	3 1/2	2,6	ECW2035H5G	3/8"	3/4"	2,55	5,7	9,4	EEP4214W1G	4.700	29	135
	NEW ESW2040H5G	10.600	230	190	400/3/50	4	3	ECW2040H5G	3/8"	3/4"	2,55	6,6	10,9	EEP4214W1G	4.700	29	135
300	NEW ESW3050H5G	12.120	260	230	400/3/50	5	3,7	ECW3050H5G	1/2"	7/8"	4,2	7,4	13,2	2x EEP4154W1G	2x 3.200	29	165
400	NEW ESW4065H5G	16.450	320	270	400/3/50	6 1/2	4,8	ECW4065H5G	1/2"	1 1/8"	4,2	10,2	17,5	2x EEP4214W1G	2x 4.700	29	170

DIMENSIONS

COND.							EVAP.				
Series	A	B	C	D1	D2	Model	A	B	C	D1	D2
200	538	359	833	479	375	EEP4084W1G	310	853	796	582	810
						EEP4094W1G	310	853	796	582	810
						EEP4154W1G	310	850	1.610	1.380	810
						EEP4214W1G	310	850	1.900	1.730	790
300	579	484	943	572	500	EEP4154W1G	310	850	1.610	1.380	810
400	677	484	943	572	500	EEP4214W1G	310	850	1.900	1.730	790

U.C + EMB./PACK.					EVAP+EMB./PACK.				
Series	A	B	C	kg	Model	A	B	C	kg
200	880	640	980	80	EEP4084W1G	315	940	1.330	35
					EEP4094W1G	315	940	1.330	35
					EEP4154W1G	315	940	1.330	55
					EEP4214W1G	315	940	1.730	65
300	970	780	1.105	110	EEP4154W1G	315	940	1.330	55
400	970	780	1.105	110	EEP4214W1G	315	940	1.730	65

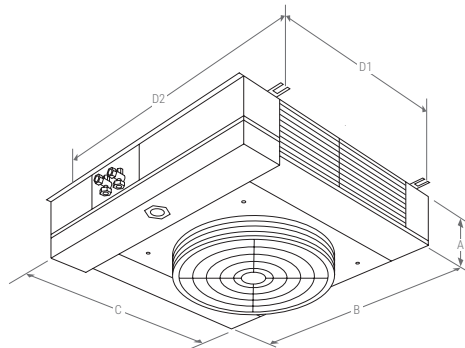

kide**WATERLOOP****-20°C****0°C****WATERLOOP SYSTEM****SILENT
CONDENSING
UNITS****EWC****SILENT**

Silent water-cooled condensing units for refrigeration and freezing, very compact in size, designed for installation on the wall, floor or on the refrigeration unit. For medium and low temperature applications.

NEW**R-455A
R-454C****A2L****GENERAL CHARACTERISTICS**

- Pre-charged with nitrogen.
- A2L ready. Other refrigerants (please consult).
- Water* or water + 30% ethylene glycol.
- Power supply 230 V-I-50 Hz or 400 V-III-50 Hz.
- Hermetic scroll compressor on anti-vibration mounts.
- Liquid injection in low-temperature models.
- Liquid receiver.
- Ceramic filter dryer.
- Liquid sight glass.
- High and low pressure switches.
- Service valves (200 series).
- Pressure switch valve.
- Hydraulic condensation circuit in copper pipe with threaded connections.
- Built-in electrical power and control panel.
- Air extraction fan.
- Watertight electrical panel.

* Provided that the ambient temperature is above 0 °C.

OPTIONS

- Winter Kit.
- Alternation / failure system for two units.
- Synchronised defrosting system for two units.
- Time control.
- Electronic controller with fan-control relays, solenoid coil, resistors, chamber temperature and defrost probes, with 10 m of electrical interconnections and a 3 m connection hose.
- Voltage protector (single-phase version).
- Humidifier external to the equipment and control.
- Anti-corrosive treatment for the condenser unit furniture
- Monitoring and control system. See page 69.

Xweb


0 °C -5 °C ÷ 10 °C		Refrigeration capacity		Compressor		Nominal consumption	Max. load current	Liq	Suct	R-455A	Conexiones hidráulicas	Flow	Noise level	Weight
Series	Model			HP	kW							condens.		
		W				A	A					m³/h	dBA	kg
200	NEW EWC2010M1G	1.750	230/1/50	1 1/4	0,9	7,3	9,2	3/8"	1/2"	NITROGEN	1"	0,33	25	54
	NEW EWC2015M1G	2.460	230/1/50	1 1/2	1,1	9,9	12,5	3/8"	5/8"		1"	0,46	25	54
	NEW EWC2020M5G	3.100	400/3/50	2	1,5	3	4,5	3/8"	5/8"		1"	0,58	25	61
	NEW EWC2025M5G	4.300	400/3/50	2 1/4	1,7	3,9	6,7	3/8"	5/8"		1"	0,8	29	64
	NEW EWC2030M5G	5.020	400/3/50	3	2,2	4,2	6,8	3/8"	3/4"		1"	0,94	29	66
	NEW EWC2035M5G	6.010	400/3/50	3 1/2	2,6	4,6	8,3	3/8"	3/4"		1"	1,12	29	66
	NEW EWC2040M5G	7.150	400/3/50	4	3	5,5	9,8	3/8"	3/4"		1 1/4"	1,33	29	69
300	NEW EWC3050M5G	8.010	400/3/50	5	3,7	5,9	11,7	1/2"	7/8"	NITROGEN	1 1/4"	1,49	29	85
400	NEW EWC4065M5G	10.740	400/3/50	6 1/2	4,8	8	15,3	1/2"	1 1/8"		1 1/4"	2	29	84

-20 °C -15 °C ÷ -25 °C		Refrigeration capacity		Compressor		Nominal consumption	Max. load current	Liq	Suct	R-455A	Conexiones hidráulicas	Flow	Noise level	Weight
Series	Model			HP	kW							condens.		
		W				A	A					m³/h	dBA	kg
200	NEW EWC2020L5G	2.380	400/3/50	2 1/2	1,8	3,5	4,9	3/8"	5/8"	NITROGEN	1"	0,44	25	62
	NEW EWC2030L5G	2.840	400/3/50	3	2,2	4,2	9,8	3/8"	3/4"		1"	0,53	29	66
300	NEW EWC3040L5G	3.610	400/3/50	4	3	6,3	12	3/8"	3/4"		1"	0,67	29	85
	NEW EWC3050L5G	4.330	400/3/50	5	3,7	7	14,4	1/2"	7/8"		1 1/4"	0,81	29	87
400	NEW EWC4060L5G	5.300	400/3/50	6	4,7	9	18,3	1/2"	1 1/8"		1 1/4"	0,99	29	87
	NEW EWC4075L5G	6.800	400/3/50	7 1/2	6,2	12,5	22,7	1/2"	1 3/8"		1 1/4"	1,27	29	87

DIMENSIONS


UNIDAD CONDENSADORA

Series	A	B	C	D1	D2
200	538	359	833	479	375
300	579	484	943	572	500
400	677	484	943	572	500




UNIDAD CONDENSADORA + EMBALAJE

	A	B	C	kg
200	880	640	980	80
300	970	780	1.105	110
400	970	780	1.105	110



REFRIGERATOR SCHEME

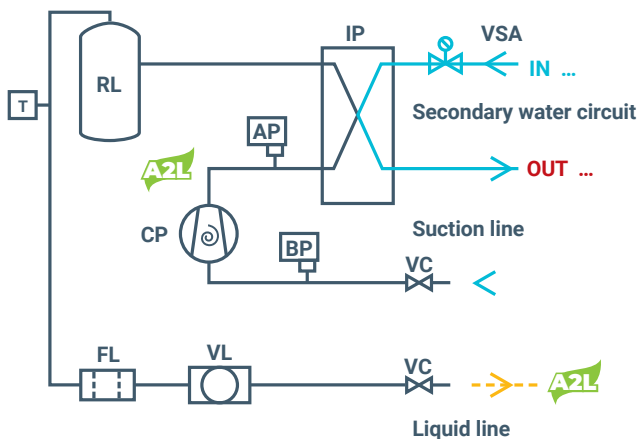

AP
High pressure switch

BP
Low pressure switch

CP
Compressor

IP
Plate exchanger

RL
Liquid container

T
Probe

VSA
Solenoid water valve

FL
Filter

VC
Shut-off valve

VL
Viewer

WATERLOOP SYSTEM

SILENT
CONDENSING
UNITS

EWC



SILENT

Silent water-cooled condensing units for refrigeration and freezing, very compact in size, designed for installation on the wall, floor or on the refrigeration unit. For medium and low temperature applications.

R-449A



GENERAL CHARACTERISTICS

- Pre-charged with nitrogen.
- R-449A ready. Other refrigerants (please consult).
- Water* or water + 30% ethylene glycol.
- Power supply 230 V-I-50 Hz or 400 V-III-50 Hz (Other voltages, please enquire).
- Hermetic scroll compressor on anti-vibration mounts.
- Liquid injection in low-temperature models.
- Stainless steel welded plate condenser.
- Liquid receiver.
- Ceramic filter dryer.
- Liquid sight glass.
- High and low pressure switches.
- Service valves (200 series).
- Pressure switch valve.
- Hydraulic condensation circuit in copper pipe with threaded connections.
- Voltage protector and magneto thermic protection.
- Built-in electrical power and control panel.

* Provided that the ambient temperature is above 0°C.

OPTIONS

- Winter Kit.
- Alternation / failure system for two units.
- Synchronised defrosting system for two units.
- Time control.
- Voltage protector (single-phase version).
- Humidifier external to the equipment and control.
- Electronic controller with fan-control relays, solenoid coil, resistors, chamber temperature and defrost probes, with 10 m of electrical interconnections and a 3 m connection hose.
- Anti-corrosive treatment for the condenser unit furniture
- Monitoring and control system. See page 69.


0 °C -5 °C ÷ 10 °C		Refrigeration capacity		Compressor		Nominal consumption	Max. load current	Liq	Suct	R-449A	Conexiones hidráulicas	Flow	Noise level	Weight
Series	Model			HP	kW									
200	EWC2012M1X	2.120	230/1/50	1 1/4	1	5,5	6,6	3/8"	1/2"	NITROGEN	1"	0,4	25	54
	EWC2020M5X	3.620	400/3/50	2	1,5	3	4,5	3/8"	5/8"		1"	0,68	25	61
	NEW EWC2025M5X	4.250	400/3/50	2 1/4	1,7	3,9	6,7	3/8"	5/8"		1"	0,79	29	64
	EWC2030M5X	4.950	400/3/50	3	2,2	4,2	6,8	3/8"	3/4"		1"	0,92	29	66
	NEW EWC2035M5X	6.150	400/3/50	3 1/2	2,6	4,6	8,3	3/8"	3/4"		1"	1,15	29	66
	EWC2040M5X	7.400	400/3/50	4	3	5,5	9,8	3/8"	3/4"		1 1/4"	1,38	29	69
300	EWC3050M5X	8.180	400/3/50	5	3,7	5,9	11,7	1/2"	7/8"	NITROGEN	1 1/4"	1,53	29	85
400	EWC4065M5X	11.830	400/3/50	6 1/2	4,8	8	15,3	1/2"	1 1/8"		1 1/4"	2,21	29	84

-20 °C -15 °C ÷ -25 °C		Refrigeration capacity		Compressor		Nominal consumption	Max. load current	Liq	Suct	R-449A	Conexiones hidráulicas	Flow	Noise level	Weight
Series	Model			HP	kW									
200	EWC2020L5X*	1.420	400/3/50	2	1,6	3,2	4,6	3/8"	5/8"	NITROGEN	3/8"	5/8"	25	62
	EWC2030L5X*	2.775	400/3/50	3	2,2	4,15	9,8	3/8"	3/4"		3/8"	3/4"	29	66
300	EWC3040L5X*	3.425	400/3/50	4	3	6,3	12	3/8"	3/4"		3/8"	3/4"	29	85
	EWC3050L5X*	4.325	400/3/50	5	3,7	7	14,4	1/2"	7/8"		1/2"	7/8"	29	87
400	NEW EWC4060L5X*	5.422	400/3/50	6	4,7	9	18,3	1/2"	1 1/8"		1/2"	1 1/8"	29	87
	NEW EWC4075L5X*	7.661	400/3/50	7 1/2	6,2	12,5	22,7	1/2"	1 3/8"		1/2"	1 3/8"	29	87

DIMENSIONS


CONDENSING UNIT

Series	A	B	C	D1	D2
200	538	359	833	479	375
300	579	484	943	572	500
400	677	484	943	572	500




CONDENSER UNIT + PACKAGING

	A	B	C	kg
200	880	640	980	80
300	970	780	1.105	110
400	970	780	1.105	110



REFRIGERATOR SCHEME

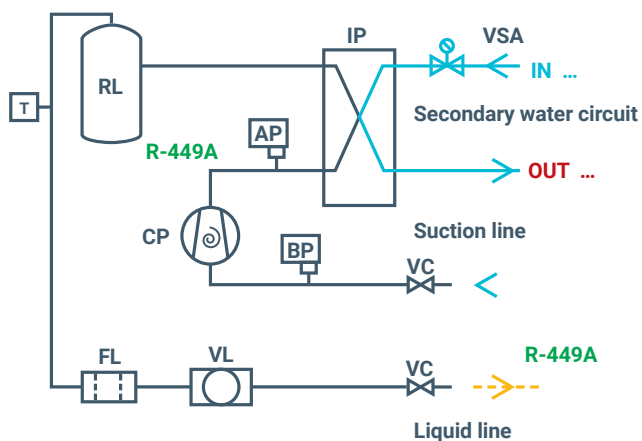

AP:
High pressure switch
BP:
Low pressure switch
CP:
Compressor
IP:
Plate exchanger
RL:
Liquid container

T:
Probe
VSA:
Solenoid water valve
FL:
Filter
VC:
Shut-off valve
VL:
Viewer

WATERLOOP SYSTEM

AIR COOLERS
WITH HYDRAULIC
SYSTEM

USI

Silent ethylene glycol water-cooled air coolers with hydraulic unit, designed to evacuate condensation heat from the refrigeration units to the outside.

WATER
GLYCOL WATER

GENERAL CHARACTERISTICS

- Water* or water + 40% ethylene glycol.
- High-efficiency water coil with copper tubes and aluminium fins.
- Threaded hydraulic connections.
- Hydraulic circuit with circulating pump, expansion tank, safety valve, mesh filter, thermometers and drain and fill socket.
- Electric control panel with pump protection, motor fan and speed regulator.
- Variation of the speed of the water pump to adapt to demand, depending on the discharge pressure.

* Provided that the ambient temperature is above 0°C

Model	Heat exchange power*	Control de caudal de WATER	Flow de fluido	Pump manometric height	Fan	Max. load current	Connections hydraulic system	Air cooler connections	Noise level	Weight
	W		m³/h	m³/h	N x Ø mm	A			dBA	kg
NEW USI000905W	9.000	Variable	0,6 - 4,8	42,8 - 13,9	2 x Ø 450	3,86	1"	1"	34	110
USI001205W	11.800	Variable	0,6 - 4,8	42,8 - 13,9	1 x Ø 630	3,58	1"	1"	34	125
NEW USI001805W	18.300	Variable	1,8 - 8,4	42,2 - 10,4	1 x Ø 630	6,58	1 1/4"	1 1/2"	50	130
USI002505W	24.500	Variable	1,8 - 8,4	42,2 - 10,4	1 x Ø 630	6,58	1 1/4"	1 1/2"	50	140
NEW USI003605W	36.700	Variable	3,6 - 14,4	43,5 - 13,1	2 x Ø 630	10,66	2"	2"	53	190
NEW USI004805W	48.400	Variable	3,6 - 14,4	43,5 - 13,1	2 x Ø 630	10,66	2"	2"	53	190







Estimated heat exchange power with air temperature of +35 °C and water + 40% ethylene glycol inlet/outlet temperature of +45 / +40 °C

DIMENSIONS

Series	AIR COOLER				WATER COOLER + PACKAGING			
	A	B	C	kg	A	B	C	kg
USI000905W	620	385	1.285	60	800	485	1.685	100
USI001205W	760	465	1.375	75	1.220	960	1.775	115
USI001805W	760	465	1.375	60	1.220	960	1.775	115
USI002505W	760	465	1.375	83	1.220	960	1.775	125
USI003605W	760	465	2.575	130	1.220	960	2.975	230
USI004805W	760	465	2.575	130	1.220	960	2.975	230

HIDRAYLIC GROUP						HYDRAULIC SYSTEM + PACKAGING			
A	B	C	D1	D2	kg	A	B	C	kg
930	304	1.204	670	326	50	930	304	1.204	150
930	304	1.204	670	326	50	930	304	1.204	150
930	304	1.204	670	326	54	930	304	1.204	150
930	304	1.204	670	326	54	930	304	1.204	150
930	304	1.204	670	326	59	930	304	1.204	150
930	304	1.204	670	326	59	930	304	1.204	150





OTHERS

Condensing units

p. 88 Silent condensing units
[ECI · A2L](#)

p. 90 Silent condensing units
[ECI · R-449A](#)

p. 92 Condensing units with
variable refrigeration
capacity
[ANTARTIC · R-449A](#)

p. 93 Antartic
[WATERLOOP SYSTEM](#)



-20°C 0°C



CONDENSING UNITS

SILENT CONDENSING UNITS

ECI

Silent Condensing Units for split systems with small and medium volume cold storage rooms, in medium and low temperature applications.

NEW

R-455A
R-454C

A2L



GENERAL CHARACTERISTICS

- Pre-charged with nitrogen.
- Scroll compressor (three-phase).
- Hermetic compressor (single-phase).
- Compressors located in a soundproofed compartment separated from the air flow.
- Liquid injection in low temperature equipment.
- Oversized condenser coil with low speed fans.
- Condensation control by pressure switch.
- Electrical power switchboard and integrated manoeuvring.
- Magneto-thermal protection (for three-phase).
- Air extraction fan.
- Watertight electrical panel.

OPTIONS

- Winter Kit.
- Electronic controller with fan-control relays, solenoid coil, resistors, chamber temperature and defrost probes, with 10 m of electrical interconnections and a 3 m connection hose.
- Voltage protector (single-phase version).
- Time control.
- Humidifier external to the equipment and control.
- Oil separator (except serie 100).
- Anti-corrosive treatment for the condenser unit furniture
- Anti-corrosion treatment on condenser coil.
- Monitoring and control system. See page 69.





0 °C -5 °C ÷ 10 °C		Refrigera- tion capacity	°C EXT	°C EXT		Compressor		Nominal consump- tion	Max. load current	(COP) SEPR	Liq	Suct	R-455A	Flow condens.	Noise level	Weight
Series	Model	W	m³	m³		HP	kW	A	A					m³/h	dBA	kg
100	NEW ECI1007M1G	1.475	12	9	230/1/50	1	0,7	5,6	8,4	(2,11)	3/8	1/2	NITROGEN	730	25	40
200	NEW ECI2010M1G	1.750	16	14	230/1/50	1 1/4	0,9	7,5	9,5	(2,08)	3/8	5/8		1.040	28	57
300	NEW ECI3020M5G	3.100	40	32	400/3/50	2	1,5	3,65	5,15	(2,05)	3/8	3/4		1.590	30	70
400	NEW ECI4025M5G	4.300	65	50	400/3/50	2 1/2	1,8	4,65	7,45	(2,16)	1/2	3/4		2.900	30	70
	NEW ECI4030M5G	5.020	86	67	400/3/50	3	2,2	4,95	7,55	2,83	1/2	3/4		3.220	32	78
500	NEW ECI5040M5G	7.150	130	100	400/3/50	4	3	6,25	10,55	2,95	1/2	7/8		4.540	32	120

-20 °C -25 °C ÷ -15 °C		Refrigera- tion capacity	°C EXT	°C EXT		Compressor		Nominal consump- tion	Max. load current	(COP) SEPR	Liq	Suct	R-455A	Flow condens.	Noise level	Weight
Series	Model	W	m³	m³		HP	kW	A	A					m³/h	dBA	kg
100	NEW ECI1010L1G	850	5	4	230/1/50	3/4	0,5	4	6,2	(1,03)	3/8	5/8	NITROGEN	1.100	28	43
200	NEW ECI2015L1G	1.350	15	10	230/1/50	1 3/4	1,3	5,83	9,2	(1,18)	3/8	5/8		1.920	30	70
300	NEW ECI3020L5G	2.375	29	21	400/3/50	2 1/2	1,8	4,15	5,55	1,44	3/8	3/4		1.590	32	76
400	NEW ECI4030L5G	2.840	36	28	400/3/50	3	2,2	4,9	10,55	1,45	1/2	3/4		3.220	32	90
	NEW ECI4040L5G	3.605	52	40	400/3/50	4	3	7,05	12,75	1,45	1/2	3/4		3.220	32	90
500	NEW ECI5050L5G	4.325	76	56	400/3/50	5	3,7	7,75	15,15	1,58	1/2	7/8		4.540	32	190
	NEW ECI5060L5G	5.300	111	77	400/3/50	6	4,7	9,75	19,05	1,48	1/2	1 1/8		4.540	32	200

DIMENSIONS

COND.					
Series	A	B	C	D1	D2
100	405	470	755	338	385
200	500	590	940	570	490
300	500	620	955	570	490
400	665	670	1.030	455	570
500	915	750	1.050	480	630

U.C + EMB./PACK.				
Series	A	B	C	kg
100	785	480	420	60
200	766	640	985	75
300	766	640	985	90
400	1.126	740	1.070	120
500	1.136	1.000	1.350	180



REFRIGERATOR SCHEME

VAC:
AC valve

TP:
Pressure tapping (when not
equipped with AC valve)

PB:
Low pressure control

PA:
High pressure control


CP:
Compressor

CD:
Condenser

RL:
Liquid container

FS:
Filter dryer

VL:
Liquid sight glass

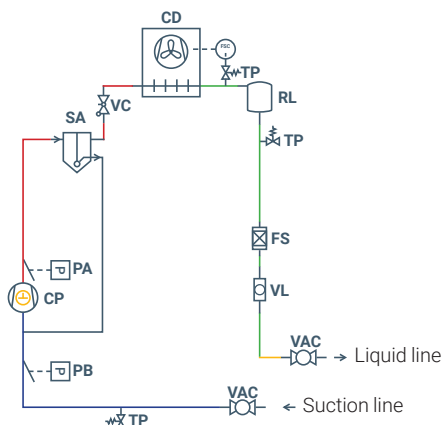



-20°C 0°C



CONDENSING UNITS

SILENT CONDENSING UNITS

ECI

R-449A



Silent Condensing Units for split systems with small and medium volume cold storage rooms, in medium and low temperature applications.

GENERAL CHARACTERISTICS

- Pre-charged with nitrogen.
- Prepared for R-449A (other refrigerants on request).
- Scroll compressor (three-phase).
- Hermetic compressor (single-phase).
- Compressors located in a soundproofed compartment separated from the air flow.
- Liquid injection in low temperature equipment.
- Oversized condenser coil with low speed fans.
- Condensation control by pressure switch (series 100 - 200).
- Electrical power switchboard and integrated manoeuvring.
- Magneto-thermal protection (for three-phase).
- Fan speed variation by condensing pressure control (series 300 - 400).

OPTIONS

- Winter Kit.
- Electronic controller with fan-control relays, solenoid coil, resistors, chamber temperature and defrost probes, with 10 m of electrical interconnections and a 3 m connection hose.
- Voltage protector (single-phase version).
- Time control.
- Humidifier external to the equipment and control.
- Oil separator (except serie 100).
- Anti-corrosive treatment for the condenser unit furniture.
- Anti-corrosion treatment on condenser coil.
- Monitoring and control system. See page 69.





0 °C -5 °C ÷ 10 °C		Refrigeration capacity	°C EXT	°C EXT		Compressor		Nominal consumption	Max. load current	(COP) SEPR	Liq	Suct	R-449A	Flow Condens.	Noise level	Weight
Series	Model	W	m³	m³		HP	kW	A	A					m³/h	dBA	kg
100	ECI1007M1X	1.340	12	9	230/1/50	3/4	0,5	3,9	5,2	(2,38)	3/8	1/2	NITROGEN	730	25	40
200	ECI2010M1X	1.975	20	17	230/1/50	1 1/4	0,9	6,4	8,6	(1,9)	3/8	5/8		1.040	28	57
300	ECI3020M5X	3.540	40	35	400/3/50	2	1,5	3,7	5,2	(2,04)	3/8	3/4		1.590	30	70
400	NEW ECI4025M5X	4.250	65	50	400/3/50	2 1/2	1,7	4,65	7,45	(2,1)	1/2	3/4		2.900	30	70
	ECI4030M5X	4.950	86	67	400/3/50	3	2,2	4,95	7,55	2,93	1/2	3/4		3.220	32	78
500	NEW ECI5040M5X	7.400	135	105	400/3/50	4	3	6,25	10,55	3,06	1/2	7/8		4.540	32	120

-20 °C -25 °C ÷ -15 °C		Refrigeration capacity	°C EXT	°C EXT		Compressor		Nominal consumption	Max. load current	(COP) SEPR	Liq	Suct	R-449A	Flow Condens.	Noise level	Weight
Series	Model	W	m³	m³		HP	kW	A	A					m³/h	dBA	kg
100	ECI1010L1X	950	6	4	230/1/50	1	0,7	3,7	5,3	(1,4)	3/8	5/8	NITROGEN	730	28	43
200	ECI2015L1X	1.280	9	6	230/1/50	1 1/2	1,1	5	7,9	(1,05)	3/8	5/8		1.040	30	70
300	ECI3020L5X	1.790	22	15	400/3/50	2	1,5	3,9	5,3	(1,13)	3/8	3/4		1.590	32	76
400	ECI4030L5X	2.775	35	28	400/3/50	3	2,2	4,9	10,55	1,6	1/2	3/4		3.220	32	90
	ECI4040L5X	3.425	52	40	400/3/50	4	2,9	7,05	12,75	1,6	1/2	3/4		3.220	32	90
500	NEW ECI5050L5X	4.325	76	56	400/3/50	5	3,7	7,75	15,15	1,6	1/2	7/8		4.540	32	190
	NEW ECI5060L5X	5.300	111	77	400/3/50	6	4,5	9,75	19,05	1,6	1/2	1 1/8		4.540	32	200

DIMENSIONS

COND.					
Series	A	B	C	D1	D2
100	405	470	755	338	385
200	500	590	940	570	490
300	500	620	955	570	490
400	665	670	1.030	455	570
500	915	750	1.050	480	630

U.C + EMB./PACK..				
Series	A	B	C	kg
100	785	480	420	60
200	766	640	985	75
300	766	640	985	90
400	1.126	740	1.070	120
500	1.136	1.000	1.350	180



REFRIGERATOR SCHEME

VAC:
AC valve

TP:
Pressure tapping (when not equipped with AC valve)

PB:
Low pressure control

PA:
High pressure control

CP:
Compressor


CD:
Condenser

CV:
Fan speed controller (Series 300-400)

RL:
Liquid container

FS:
Filter dryer

VL:
Liquid sight glass

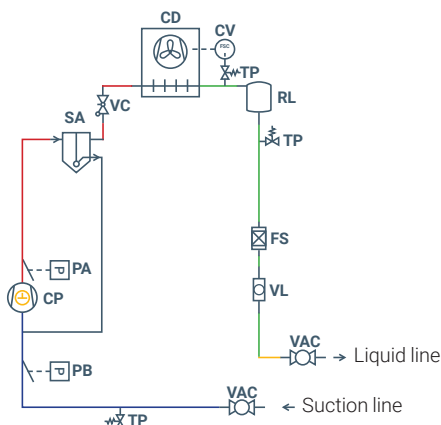


CONDENSING UNITS

CONDENSING
UNITS WITH
VARIABLE
REFRIGERATION
CAPACITY

ANTARTIC

R-449A

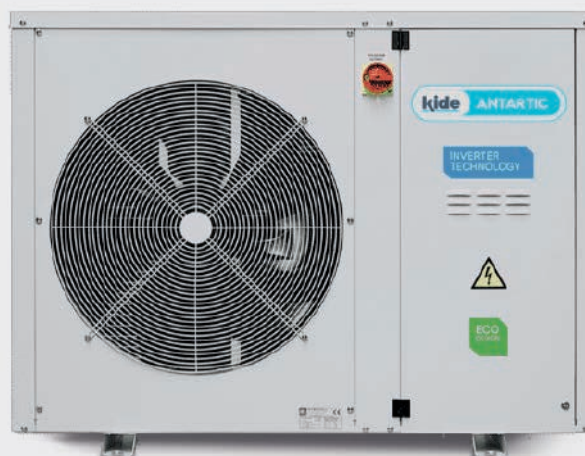

Condensing units with variable refrigeration capacity to serve more than one chamber, for medium and low temperature applications.

GENERAL CHARACTERISTICS

- Pre-charged with nitrogen.
- Refrigerant R-449A, optionally for R-134A and R-513A (please consult the technical office for the cooling capacities of these refrigerants).
- Power supply 380-415 V-III-50 Hz. Other voltages available on request.
- Available in silent and high pressure version for air extraction duct installation.
- Medium and low temperature (0 °C to -20 °C).
- Oil separator included.
- Cooling capacity regulation, INVERTER technology.
- Rotary or scroll compressor.
- Liquid injection for low temperature equipment with R-449A.
- Fan speed variation via condensing pressure control.

OPTIONS

- Winter Kit.
- Anti-Corrosion coating of the condenser
- Remote monitoring.
- Special wooden packaging for container shipment.
- Electronic controller with fan-control relays, solenoid coil, resistors, chamber temperature and defrost probes, with 10 m of electrical interconnections and a 3 m connection hose.
- Electronic controller with fan-control relays, solenoid coil, resistors, chamber temperature and defrost probes, with 10 m of electrical interconnections and a 3 m connection hose for **two evaporators**.
- Monitoring and control system. See page 69.



Type	0 °C -5 °C ÷ 10 °C (ΔT1 = 8 K)	Range	Refrigeration capacity W(*)					Nominal absolute power	(COP) SEPR	Absolute maximum intensity	Fan	Flow	Liq-gas refrigeration connection	Noise level	Weight
	R-449A														
	Model		5 °C*	0 °C*	-5 °C*	-10 °C*	-15 °C*	kW			A	mm	m³/h	dBA	kg
SILENT	UZ04CRS0045M5X	min	1.263	1.084	921	771	638	2.474	(1,88)	12	1 x 450	3.850	3/8"-5/8"	38	118
		max	8.042	6.799	5.670	4.666	3.871								
	UZ04CRS0070M5X	min	1.927	1.665	1.414	1.176	960	3.754	3,88	12	1 x 630	5.496	3/8"-3/4"	39	135
		max	10.895	9.690	8.453	7.216	6.030								
	UZ04CRS0100M5X	min	5.311	4.291	3.455	2.777	2.223	5.915	3,04	16	1 x 630	6.150	1/2"-7/8"	39	176
		max	17.056	14.237	11.826	9.791	8.088								
	UZ04CRS0210M5X	min	5.548	4.456	3.570	2.858	2.282	11.529	2,66	27	2 x 630	11.150	5/8"-1 1/8"	44	311
		max	32.440	27.315	22.737	18.712	15.237								
	UZ04CRS0290M5X	min	8.152	6.589	5.303	4.262	3.429	13.930	3,20	17,5	2 x 630	12.600	7/8"-1 3/8"	44	430
		max	45.486	38.779	32.797	27.511	22.887								
	UZ04CRS0390M5X	min	13.369	10.769	8.440	6.486	5.012	19.360	3,45	31	1 x 800	21.000	7/8"-1 5/8"	43	520
		max	68.187	57.247	47.773	39.693	32.882								
HIGH PRESSURE	UZ04CRCH045M5X	min	1.263	1.084	921	771	638	2.474	Consultar	12	1 x 450	3.850	3/8"-5/8"	38	118
		max	8.042	6.799	5.670	4.666	3.871								
	UZ04CRCH100M5X	min	5.311	4.291	3.455	2.777	2.223	5.915	Consultar	16	1 x 630	6.150	1/2"-7/8"	39	176
		max	17.056	14.237	11.826	9.791	8.088								
	UZ04CRCV210M5X	min	8.166	6.601	5.315	4.293	3.513	11.874	Consultar	16	1 x 560	9.500	5/8"-1 1/8"	44	311
		max	30.968	26.587	22.743	19.400	16.496								

Type	-20 °C -25 °C ÷ 15 °C (ΔT1 = 8 K)	Range	Refrigeration capacity W(*)			Nominal absolute power	(COP) SEPR	Absolute maximum intensity	Fan	Flow	Liq-gas refrigeration connection	Noise level	Weight
	R-449A												
	Model		-25 °C*	-30 °C*	-33 °C*	kW		A	mm	m³/h		dBA	kg
SILENT	UZ04CRS0030L5X	min	668	543	481	2.930	2,16	12	1 x 450	3.820	3/8"-3/4"	38	125
		max	4.194	3.472	3.089								
	UZ04CRS0100L5X	min	2.841	2.182	1.775	8.990	3,39	24,6	2 x 630	11.150	5/8"-1 1/8"	44	286
		max	10.591	8.508	7.988								
ALTA PRESIÓN	UZ04CRCH030L5X	min	668	543	481	2.930	Consultar	12	1 x 450	3.820	3/8"-3/4"	38	125
		max	4.194	3.472	3.089								
	UZ04CRCV100L5X	min	3.491	3.409	3.187	8.880	Consultar	15,1	1 x 560	8.500	5/8"-1 1/8"	44	250
		max	11.204	9.144	7.930								



Conditions according to UNE-E N 13215:T standard. Ambient 32 °C, Evaporation T. of -10 °C (MT) and -30 °C (BT), SH = 10 K, refrigerant R-449A




High temperature equipment, consult technical office.




Evaporating temperatures.

DIMENSIONS


	A	A1	B	B1	C	C1	D1	D2	E	F	S	L
UZ04CRS0045M5X	1.106		560		466	536	728		496	50	150	240
UZ04CRCH045M5X	1.106		560		471	541	728		496	50	150	240
UZ04CRS0030L5X	1.106		560		466	536	728		496	50	150	240
UZ04CRCH030L5X	1.106		560		471	541	728		496	50	150	240
UZ04CRS0070M5X	1.140		760		430	510	770		470	50	217	277
UZ04CRS0100M5X	1.289		963		439	510	810		470	57	478	539
UZ04CRCH100M5X	1.289		963		444	515	810		470	57	478	539
UZ04CRS0390M5X	1.525	1.670	1.695		1.035	1.090	440	570	1.050	195	200	300
UZ04CRCV210M5X00	1.327		1.558	1.677	745	790	490		750	80	590	670
UZ04CRCV100L5X00	1.327		1.558	1.677	745	790	490		750	80	590	670

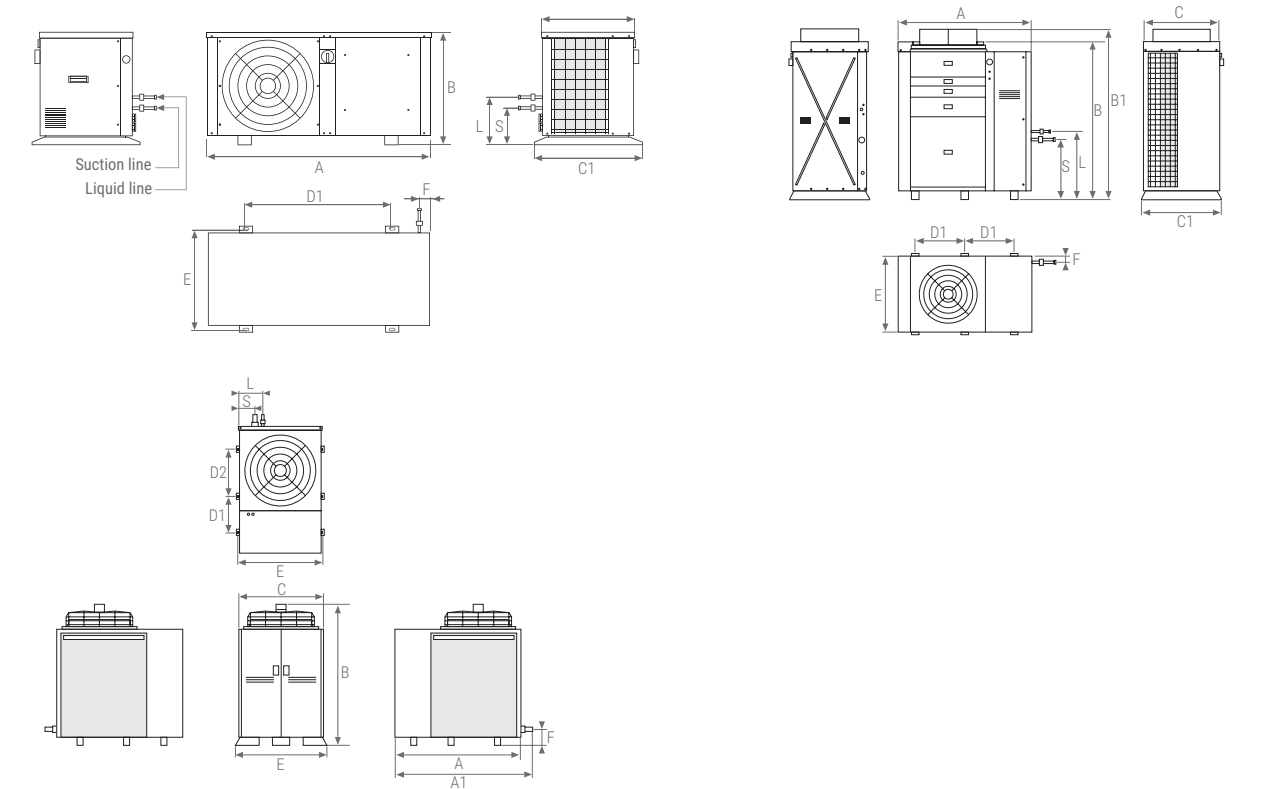

	A	A1	B	B1	C	C1	D1	D2	E	F	S	L
UZ04CRS0210M5X	1.521	1.493	475	541	751		501	69	519	430	150	240
UZ04CRS0100L5X	1.322	1.493	475	541	751		501	78	658	742	150	240
UZ04CRS0290M5X	1.528	1.488	879	950	549	420	910	148	455	44	150	240

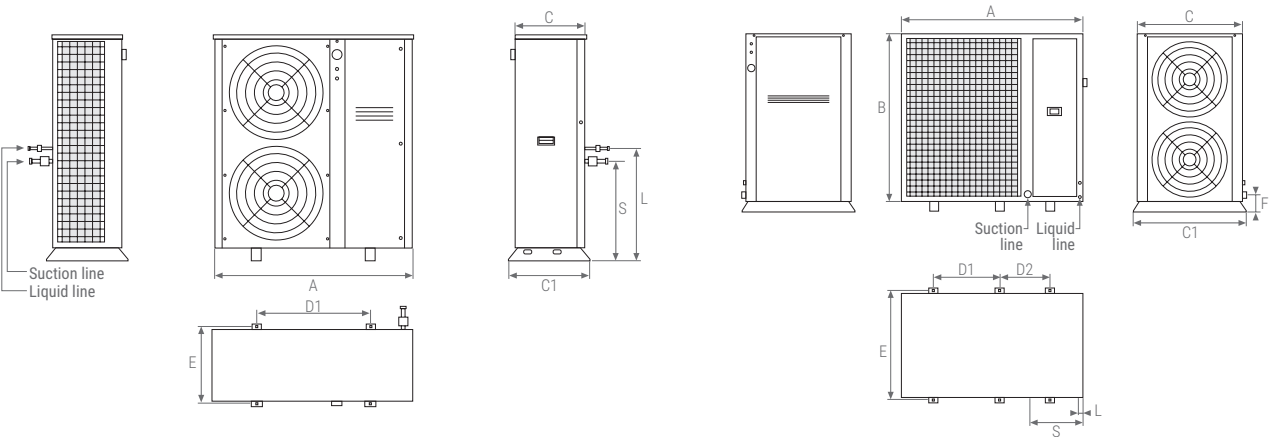

REFRIGERATOR SCHEME

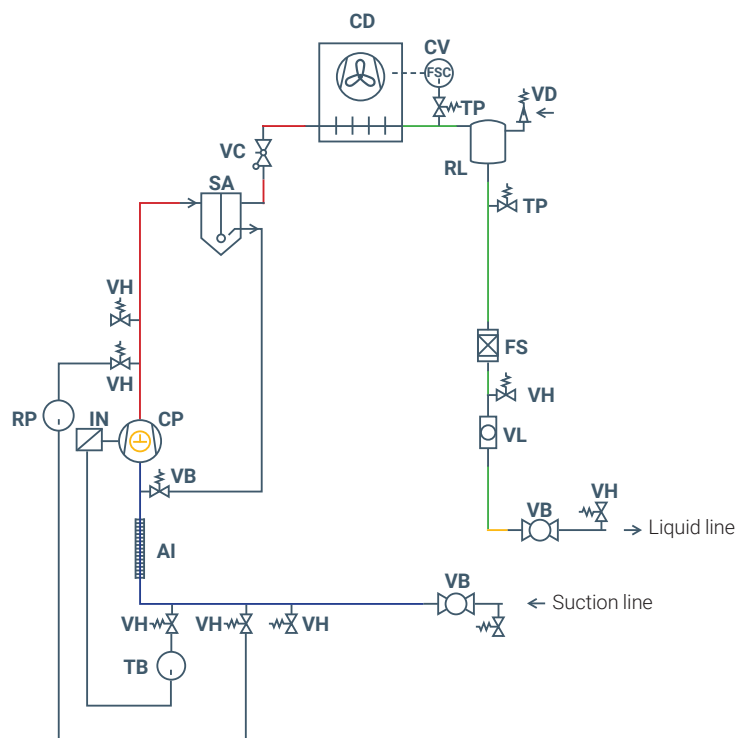

VB:
Ball valve

VH:
Schrader valve

TB:
Low transducer

AI:
Insulation

CP:
Compressor

IN:
Inverter

RP:
Low/High Pressure Regulator

SA:
Oil separator

VC:
Shut-off valve

CD:
Condenser

CV:
Fan speed controller (300-400)

RL:
Liquid container

VS:
Safety valve


FS:
Drying filter

VL:
Liquid viewer

CONDENSING UNITS

ANTARTIC - WATERLOOP SYSTEM


Water-cooled variable refrigeration capacity condensing units, to serve more than one chamber for high, medium and low temperature applications.

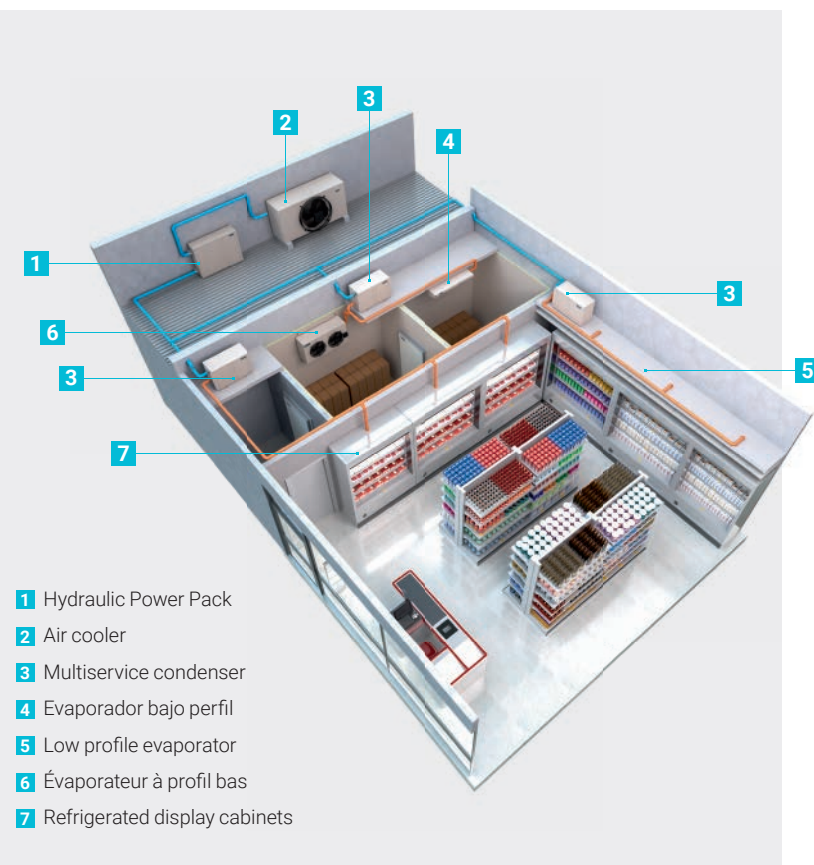

GENERAL CHARACTERISTICS

- Refrigerant R-449A, optionally for R-134A and R-513A (please consult the technical office for the cooling capacities of these refrigerants).
- Power supply 380-415 V-III-50 Hz. Other voltages available on request.
- Condensation by plate heat exchanger.
- Medium and low temperature (0 °C to -20 °C).
- Oil separator included.
- Cooling capacity regulation, INVERTER technology.
- Rotary or scroll compressor.
- Liquid injection for low temperature equipment with R-449A.

REFRIGERATOR SCHEME

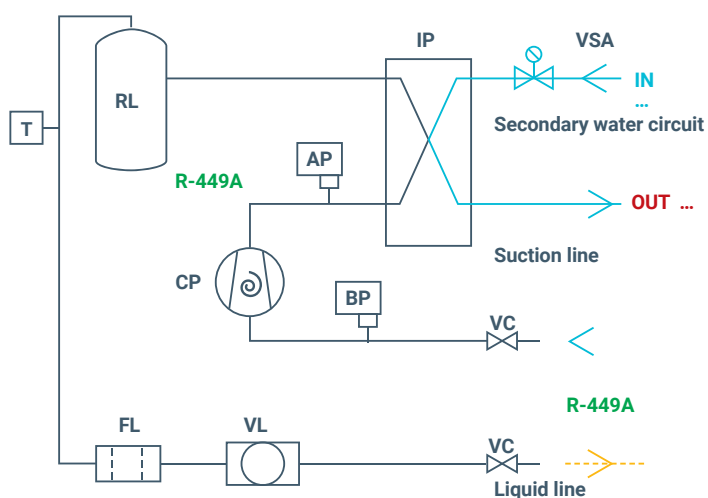

AP:
High pressure switch

BP:
Low pressure switch

CP:
Compressor

IP:
Plate exchanger

RL:
Liquid container

T:
Probe

VSA:
Solenoid water valve

FL:
Filter

VC:
Shut-off valve

VL:
Viewer



OTHERS

Evaporators

p. 98 Low-profile
evaporators
[A2L](#)

p. 100 Low-profile
evaporators
[R-449A](#)

p. 102 Cubic evaporators
[A2L](#)

p. 104 Cubic evaporators
[R-449A](#)

p. 106 Double flow
evaporators
[A2L](#)

p. 108 Double flow
evaporators
[R-449A](#)

EVAPORATORS

-20°C 0°C

LOW-PROFILE EVAPORATORS

Evaporator units for medium and low temperature applications.

R-455A
R-454C

A2L



GENERAL CHARACTERISTICS

- Power supply 230/1/50. Other voltages available on request.
- High-flow axial fans.
- High-efficiency evaporative coils with copper tubes and aluminium fins.
- Liquid solenoid valve and adjustable thermostatic expansion valve built into the unit.
- Refrigeration connections to be welded, with suction-line siphon built into the unit.
- Low-temperature drain resistance (2 m).
- Electric defrost using resistors.

OPTIONS

- Electronic controller with fan-control relays, solenoid coil, resistors, chamber temperature and defrost probes, with 10 m of electrical interconnections and a 3 m connection hose.
- Electronic controller with fan-control relays, solenoid coil, resistors, chamber temperature and defrost probes, with 10 m of electrical interconnections and a 3 m connection hose for two evaporators.
- Anti-corrosion treatment on evaporator coil.

0 °C -5 °C ÷ 10 °C (ΔT = 8 K)	Refrigeration capacity	Battery		Ventilation fans				Electric defrost		Liq-gas refrigeration connection	Weight
		Spf.	Vol.	Flow	Ø	Power	Reach	Power	Intensity		
Model	W	m²	L	m³/h	mm	Nº x W	m	W	A		kg
EEC3001M1G	1.300	6,7	1,3	1.000	250	1 x 70	4	650	2,8	3/8-1/2	15
EEC3022M1G	2.000	11,3	2,5	2.000	250	2 x 70	4	900	3,9	3/8-5/8	25
EEC3003M1G	3.800	19,3	4,1	3.000	250	3 x 70	6	1.250	5,4	3/8-3/4	40

i If the equipment is to operate in a working range between 0 and -5 °C, it will be necessary to include a drain resistor. (Consult the technical office).


-20 °C -25 °C ÷ -15 °C (ΔT = 8 K)	Refrigeration capacity	Battery		Ventilation fans				Electric defrost		Liq-gas refrigeration connection	Weight
		Spf.	Vol.	Flow	Ø	Power	Reach	Power	Intensity		
Model	W	m²	L	m³/h	mm	Nº x W	m	W	A		kg
EEC3001L1G	1.100	6,1	1,6	1.300	230	2 x 40	4	850	3,7	3/8-5/8	20
EEC3002L1G	1.400	9,7	2,5	3.000	250	3 x 70	5	1.200	5,2	3/8-5/8	30
EEC3003L1G	2.000	16,8	4,6	4.000	250	4 x 70	6	1.800	7,8	3/8-3/4	45

FIN PASS: Medium: 4 mm - 5 mm/Low: 6 mm - 8 mm

DIMENSIONS


EVAPORATOR

	A	B	C	D1	D2
1M	210	420	820	570	440
1L	210	425	920	670	460
22M	210	425	1.205	950	460
2L	210	425	1.310	1.050	460
3M	240	425	1.690	1.420	460
3L	240	425	1.890	1.620	460

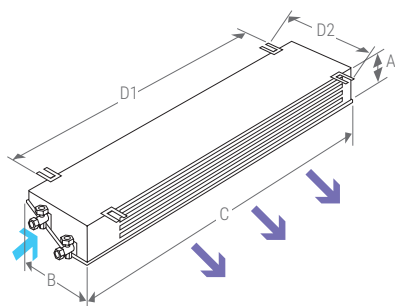

UNIT + EMB. / PACK.

	A	B	C	kg
1M	300	530	1.015	25
1L	300	530	1.015	30
22M	300	530	1.395	35
2L	300	530	1.395	45
3M	330	535	1.980	50
3L	330	535	1.980	50

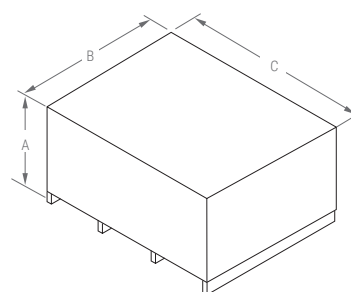

EVAPORATORS

-20°C 0°C

LOW-PROFILE EVAPORATORS

Evaporator units for medium and low temperature applications.



GENERAL CHARACTERISTICS

- Power supply 230/1/50. Other voltages available on request.
- High-flow axial fans.
- High-efficiency evaporative coils with copper tubes and aluminium fins.
- Liquid solenoid valve and adjustable thermostatic expansion valve built into the unit.
- Refrigeration connections to be welded, with suction-line siphon built into the unit.
- Low-temperature drain resistance (2 m).
- Electric defrost using resistors.

OPTIONS

- Electronic controller with fan-control relays, solenoid coil, resistors, chamber temperature and defrost probes, with 10 m of electrical interconnections and a 3 m connection hose.
- Electronic controller with fan-control relays, solenoid coil, resistors, chamber temperature and defrost probes, with 10 m of electrical interconnections and a 3 m connection hose for two evaporators.
- Anti-corrosion treatment on evaporator coil.

0 °C -5 °C ÷ 10 °C (ΔT = 8 K)	Refrigeration capacity	Battery		Ventilation fans				Electric defrost		Liq-gas refrigeration connection	Weight
		Spf.	Vol.	Flow	Ø	Power	Reach	Power	Intensity		
Model	W	m²	L	m³/h	mm	Nº x W	m	W	A		kg
EEC3000M1X	1.000	3,5	1,1	440	250	1 x 36	3,5	283	1,29	3/8-1/2	7
EEC3001M1X	1.300	6,7	1,3	1.000	250	1 x 70	4	650	2,8	3/8-1/2	15
EEC3022M1X	1.975	8,5	2	2.000	250	2 x 70	4	900	3,9	3/8-5/8	25
EEC3002M1X	2.300	11,3	2,5	2.000	250	2 x 70	4	900	3,9	3/8-5/8	25
EEC3003M1X	3.800	19,3	4,1	3.000	250	3 x 70	6	1.250	5,4	3/8-3/4	40

i If the equipment is to operate in a working range between 0 and -5 °C, it will be necessary to include a drain resistor. (Consult the technical office).

-20 °C -25 °C ÷ -15 °C (ΔT = 8 K)	Refrigeration capacity	Battery		Ventilation fans				Electric defrost		Liq-gas refrigeration connection	Weight
		Spf.	Vol.	Flow	Ø	Power	Reach	Power	Intensity		
Model	W	m²	L	m³/h	mm	Nº x W	m	W	A		kg
EEC3000L1X*	800	3,5	1,1	440	250	1 x 36	3,5	283	1,29	3/8-1/2	7
EEC3001L1X*	1.100	6,1	1,6	1.300	230	2 x 40	4	850	3,7	3/8-5/8	20
EEC3002L1X*	1.400	9,7	2,5	3.000	250	3 x 70	5	1.200	5,2	3/8-5/8	30
EEC3003L1X*	2.000	16,8	4,6	4.000	250	4 x 70	6	1.800	7,8	3/8-3/4	45


★ Also available with R-452A

FIN PASS: Medium: 4 mm - 5 mm/Low: 6 mm - 8 mm

DIMENSIONS


EVAPORATOR

	A	B	C	D1	D2
0M-0L	480	195	520	348	230
1M	210	420	820	570	440
1L	210	425	920	670	460
2M	210	425	1.205	950	460
22M	210	425	1.205	950	460
2L	210	425	1.310	1.050	460
3M	240	425	1.690	1.420	460
3L	240	425	1.890	1.620	460

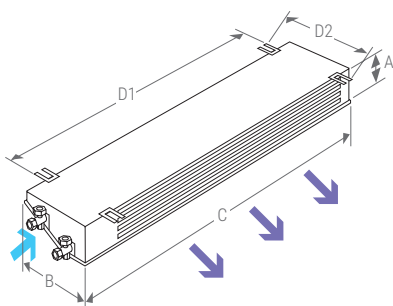

UNIT + EMB, / PACK,

	A	B	C	kg
0M-0L	300	530	1.015	20
1M	300	530	1.015	25
1L	300	530	1.015	30
2M	300	530	1.395	35
22M	300	530	1.395	35
2L	300	530	1.395	45
3M	330	535	1.980	50
3L	330	535	1.980	50

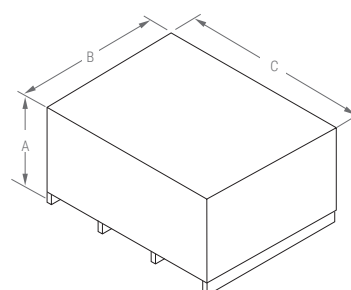

EVAPORATORS

-20°C 0°C

CUBIC EVAPORATORS

Evaporator units for high temperature applications.

R-455A
R-454C



GENERAL CHARACTERISTICS

- Power supply 400/III/50. Other voltages available on request.
- High-flow axial fans.
- High-efficiency evaporative coils with copper tubes and aluminium fins.
- Liquid solenoid valve and adjustable thermostatic expansion valve built into the unit.
- Refrigeration connections to be welded, with suction-line siphon built into the unit.
- Low-temperature drain resistance (2 m).
- Electric defrost using resistors.

OPTIONS

- Electronic controller with fan-control relays, solenoid coil, resistors, chamber temperature and defrost probes, with 10 m of electrical interconnections and a 3 m connection hose.
- Electronic controller with fan-control relays, solenoid coil, resistors, chamber temperature and defrost probes, with 10 m of electrical interconnections and a 3 m connection hose for two evaporators.
- Anti-corrosion treatment on evaporator coil.

0 °C -5 °C ÷ 10 °C (ΔT = 8 K)	Refrigeration capacity	Battery		Ventilation fans				Electric defrost		Liq-gas refrigeration connection	Weight
		Spf.	Vol.	Flow	Ø	Power	Reach	Power	Intensity		
		m²	L	m³/h	mm	Nº x W	m	W	A		kg
Model	W										
EEC2116M1G	1.600	6,5	2,8	1.800	315	1 x 105	19	1.377	2,3	1/2-5/8	15
EEC2156M1G	4.000	17,7	3,1	4.540	350	2 x 129	17	2.720	5,93	1/2-3/4	52
EEC2206M1G	4.448	19,4	7,5	3.200	315	2 x 110	20	3.160	6,9	1/2-5/8	31
EEC2236M1G	5.390	19,4	7,2	5.490	315	3 x 110	20	3.430	5,4	1/2-7/8	38
EEC2316M1G	6.475	25,2	8,7	5.600	350	2 x 145	20	4.455	9,3	1/2-7/8	42
UEC2416M5G	11.240	37,9	13,6	8.540	350	3 x 145	20	7.980	11,5	5/8-1 1/8	62
UEC2924M5G	17.240	56	15	11.500	450	2 x 480	20	5.170	7,5	7/8-1 3/8	69
UEC3232M5G	21.800	84	22	10.400	450	2 x 960	22	6.440	11	1 1/8-1 5/8	83
UEC3434M5G	27.300	84,4	39	15.000	630	1 x 1.900	38	13.760	20,8	1 3/8-2 1/8	189

i If the equipment is to operate in a working range between 0 and -5 °C, it will be necessary to include a drain resistor. (Consult the technical office).


-20 °C -25 °C ÷ -15 °C (ΔT = 8 K)	Refrigeration capacity	Battery		Ventilation fans				Electric defrost		Liq-gas refrigeration connection	Weight
		Spf.	Vol.	Flow	Ø	Power	Reach	Power	Intensity		
		m²	L	m³/h	mm	Nº x W	m	W	A		kg
Model	W										
EEC2066L1G	1.200	22,1	3,9	6.400	400	2 x 170	19	2.720	5,93	1/2-3/4	53
EEC2116L1G	1.600	6,5	2,8	1.800	315	1 x 105	19	1.377	2,3	1/2-5/8	15
EEC2156L1G	3.600	12,9	5	3.670	315	2 x 110	20	2.400	3,9	1/2-5/8	27
EEC2206L1G	4.500	19,4	7,5	3.200	315	2 x 110	20	3.160	6,9	1/2-5/8	31
EEC2236L1G	5.500	19,4	7,2	5.490	315	3 x 110	20	3.430	5,4	1/2-7/8	38
EEC2316L1G	6.312	25,2	8,7	5.600	350	2 x 145	20	4.455	9,3	1/2-7/8	42
UEC2416L5G	8.298	37,9	13,6	8.540	350	3 x 145	20	7.980	11,5	5/8-1 1/8	62
UEC3037L5G	17.200	63,3	30	15.900	630	1 x 1.900	20	9.695	14	1 5/8-1 1/8	172
UEC3434L5G	21.100	84,4	39	15.900	630	1 x 1.900	38	13.760	20,8	1 3/8-2 1/8	189

FIN PASS: Medium: 4 mm - 5 mm/Low: 6 mm - 8 mm

DIMENSIONS


EVAPORATOR

	A	B	C	D1	D2
116	440	695	380	475	410
156	440	1.145	450	925	410
206	440	1.145	450	925	410
236	440	1.595	450	1.375	450
316	565	1.565	400	1.345	450
416	565	1.565	400	1.345	450
924	675	1.965	450	1.625	490
037	675	1.965	450	1.625	490
232	675	1.965	450	1.625	490
434	675	1.965	450	1.625	490



UNIT + EMB. / PACK.

	A	B	C	kg
116	530	560	1.180	25
156	530	560	1.180	35
206	530	560	1.180	40
236	530	560	1.620	55
316	670	580	1.590	55
416	670	580	2.250	80
924	700	630	2.000	100
037	1.220	850	1.900	200
232	1.220	850	1.900	200
434	1.220	850	1.900	200

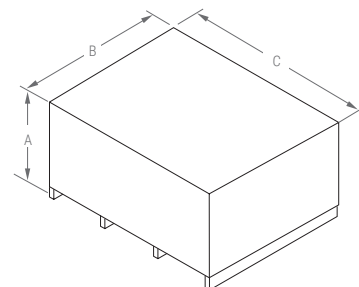

EVAPORATORS

-20°C 0°C

CUBIC EVAPORATORS

R-449A



Evaporating units for medium and low temperature applications.

GENERAL CHARACTERISTICS

- Power supply 400/III/50. Other voltages available on request.
- High-flow axial fans.
- High-efficiency evaporative coils with copper tubes and aluminium fins.
- Liquid solenoid valve and adjustable thermostatic expansion valve built into the unit.
- Refrigeration connections to be welded, with suction-line siphon built into the unit.
- Low-temperature drain resistance (2 m).
- Electric defrost using resistors.

OPTIONS

- Electronic controller with fan-control relays, solenoid coil, resistors, chamber temperature and defrost probes, with 10 m of electrical interconnections and a 3 m connection hose.
- Electronic controller with fan-control relays, solenoid coil, resistors, chamber temperature and defrost probes, with 10 m of electrical interconnections and a 3 m connection hose for two evaporators.
- Anti-corrosion treatment on evaporator coil.

0 °C -5 °C ÷ 10 °C (ΔT = 8 K)	Refrigera- tion capacity	Battery		Ventilation fans				Electric defrost		Liq-gas refrigeration connection	Weight
		Spf.	Vol.	Flow	Ø	Power	Reach	Power	Intensity		
Model	W	m²	L	m³/h	mm	Nº x W	m	W	A		kg
EEC2066M1X	1.400	8,45	2,8	650	250	1 x 36	7	1.083	1,86	1/2-1/2	11
EEC2116M1X	1.600	6,46	2,8	1.800	315	1 x 105	19	1.377	2,3	1/2-5/8	15
EEC2156M1X	4.000	12,9	5	3.670	315	2 x 110	19	2.403	3,9	1/2-5/8	27
EEC2206M1X	4.448	19,4	7,5	3.200	315	2 x 110	20	3.160	6,9	1/2-5/8	31
EEC2236M1X	5.390	19,4	7,2	5.490	315	3 x 110	20	3.430	5,4	1/2-7/8	38
EEC2316M1X	6.475	25,2	8,7	5.600	350	2 x 145	20	4.455	9,3	1/2-7/8	42
UEC2416M5X	11.240	37,9	13,6	8.540	350	3 x 145	20	7.980	11,5	5/8-1 1/8	62
UEC2924M5X	17.240	56	15	11.500	450	2 x 480	20	5.170	7,5	7/8-1 3/8	69
UEC3232M5X	21.800	84	22	10.400	450	2 x 960	22	6.440	11	1 1/8-1 5/8	83
UEC3434M5X	30.900	84,4	39	15.000	630	1 x 1.900	38	13.760	20,8	1 3/8-2 1/8	189

i If the equipment is to operate in a working range between 0 and -5 °C, it will be necessary to include a drain resistor. (Consult the technical office).

-20 °C -25 °C ÷ -15 °C (ΔT = 8 K)	Refrigera- tion capacity	Battery		Ventilation fans				Electric defrost		Liq-gas refrigeration connection	Weight
		Spf.	Vol.	Flow	Ø	Power	Reach	Power	Intensity		
Model	W	m²	L	m³/h	mm	Nº x W	m	W	A		kg
EEC2066L1X*	1.200	8,45	2,8	650	250	1 x 36	7	1.083	1,86	1/2-1/2	11
EEC2116L1X*	1.600	6,46	2,8	1.800	315	1 x 105	19	1.377	2,3	1/2-5/8	15
EEC2156L1X*	3.600	12,9	5	3.670	315	2 x 110	20	2.400	3,9	1/2-5/8	27
EEC2206L1X*	4.500	19,4	7,5	3.200	315	2 x 110	20	3.160	6,9	1/2-5/8	31
EEC2236L1X*	5.500	19,4	7,2	5.490	315	3 x 110	20	3.430	5,4	1/2-7/8	38
EEC2316L1X*	6.312	25,2	8,7	5.600	350	2 x 145	20	4.455	9,3	1/2-7/8	42
UEC2416L5X*	11.240	37,9	13,6	8.540	350	3 X 145	20	7.980	11,5	5/8-1 1/8	62
UEC3037L5X*	17.200	63,3	30	15.900	630	1 x 1.900	20	9.695	14	1 5/8-1 1/8	172
NEW UEC3434L5X*	21.100	84,4	39	15.900	630	1 x 1.900	38	13.760	20,8	1 3/8-2 1/8	189


***** Also available with R-452A

FIN PASS: Medium: 4 mm - 5 mm/Low: 6 mm - 8 mm

DIMENSIONS


EVAPORATOR

	A	B	C	D1	D2
066	375	575	350	355	370
116	440	695	380	475	410
156	440	1.145	450	925	410
206	440	1.145	450	925	410
236	440	1.595	450	1.375	450
316	565	1.565	400	1.345	450
416	565	1.565	400	1.345	450
924	675	1.965	450	1.625	490
037	675	1.965	450	1.625	490
232	675	1.965	450	1.625	490
434	675	1.965	450	1.625	490



UNIT + EMB. / PACK.

	A	B	C	kg
066	530	560	1.180	20
116	530	560	1.180	25
156	530	560	1.180	35
206	530	560	1.180	40
236	530	560	1.620	55
316	670	580	1.590	55
416	670	580	2.250	80
924	700	630	2.000	100
037	1.220	850	1.900	200
232	1.220	850	1.900	200
434	1.220	850	1.900	200

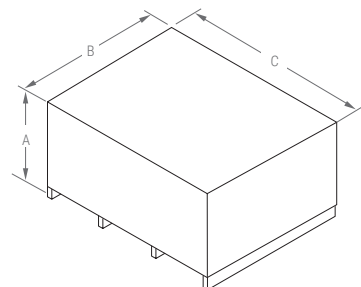

EVAPORATORS

12°C

DOUBLE FLOW EVAPORATORS

Evaporating units for high temperature applications.

R-455A
R-454C



GENERAL CHARACTERISTICS

- Power supply 230/I/50 and 400/III/50. Other voltages available on request.
- Low speed axial fans tubes and aluminium fins.
- High-efficiency evaporative coils with copper tubes and aluminium fins.
- Loose liquid solenoid valve.
- Adjustable thermostatic expansion valve integrated into the unit.
- Refrigeration connections to be welded, with suction-line siphon built into the unit.
- Air defrosting.

OPTIONS


- Electronic controller with fan-control relays, solenoid coil, resistors, chamber temperature and defrost probes, with 10 m of electrical interconnections and a 3 m connection hose.
- Electronic controller with fan-control relays, solenoid coil, resistors, chamber temperature and defrost probes, with 10 m of electrical interconnections and a 3 m connection hose for two evaporators.
- Built-in condensate pump on double-flow evaporators (max. Pumping head 1.5 m).
- Anti-corrosion treatment on evaporator coil.

12 °C +10°C ÷ 15 °C (ΔT = 8 K)	Refrigeration capacity	Battery		Ventilation fans				Defrost		Liq-gas refrigeration connection	Weight
		Spf.	Vol.	Flow	Ø	Power	Reach	Power	Intensity		kg
Model	W	m²	L	m³/h	mm	Nº x W	m	W	A		
EEP4084W1G	4.250	8,5	1,8	1.625	350	1 x 95	6	Aire	-	3/8-1/2	32
EEP4094W1G	3.484	8,5	1,8	1.380	300	1 x 85	6	Aire	-	3/8-1/2	32
EEP4154W1G	8.500	15,6	3,2	3.200	350	2 x 95	7	Aire	-	3/8-5/8	45
EEP4214W1G	12.750	21,6	4,8	4.700	350	3 x 95	8	Aire	-	1/2-3/4	65
EEP4330W1G	14.540	34,8	8	4.700	350	3 x 95	8	Aire	-	1/2-3/5	70

DIMENSIONS


EVAPORATOR

	A	B	C	D1	D2
084	284	853	796	582	810
094	310	853	796	582	810
154	307	853	1.203	982	810
214	307	853	1.612	1.382	810
330	310	848	1.900	1.731	790

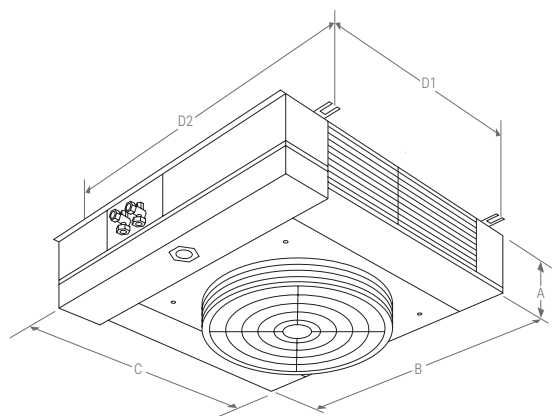

UNIT + EMB. / PACK.

	A	B	C	kg
084	315	940	1.330	35
094	315	940	1.330	35
154	315	940	1.330	55
214	315	940	1.730	65
330	315	940	1.730	110

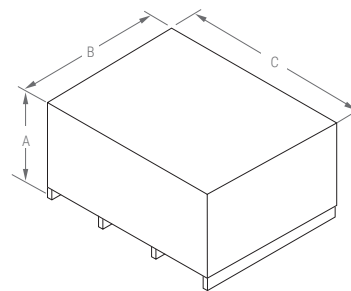

EVAPORATORS

12°C

DOUBLE FLOW EVAPORATORS

Evaporating units for high temperature applications.

R-449A



GENERAL CHARACTERISTICS

- Power supply 230/I/50 and 400/III/50. Other voltages available on request.
- Low speed axial fans tubes and aluminium fins.
- High-efficiency evaporative coils with copper tubes and aluminium fins.
- Loose liquid solenoid valve.
- Adjustable thermostatic expansion valve integrated into the unit.
- Refrigeration connections to be welded, with suction-line siphon built into the unit.
- Air defrosting.

OPTIONS


- Electronic controller with fan-control relays, solenoid coil, resistors, chamber temperature and defrost probes, with 10 m of electrical interconnections and a 3 m connection hose.
- Electronic controller with fan-control relays, solenoid coil, resistors, chamber temperature and defrost probes, with 10 m of electrical interconnections and a 3 m connection hose for two evaporators.
- Built-in condensate pump on double-flow evaporators (max. Pumping head 1.5 m).
- Anti-corrosion treatment on evaporator coil.

+12 °C 10 °C ÷ 15 °C (ΔT = 8 K)	Refrigeration capacity	Battery		Ventilation fans				Defrost		Liq-gas refrigeration connection	Weight
		Spf.	Vol.	Flow	Ø	Power	Reach	Power	Intensity		kg
Model	W	m²	L	m³/h	mm	Nº x W	m	W	A		
EEP4084W1X	4.250	8,5	1,8	1.625	350	1 x 95	6	Aire	-	3/8-1/2	32
EEP4094W1X	3.484	8,5	1,8	1.380	300	1 x 85	6	Aire	-	3/8-1/2	32
EEP4154W1X	8.500	15,6	3,2	3.200	350	2 x 95	7	Aire	-	3/8-5/8	45
EEP4214W1X	12.750	21,6	4,8	4.700	350	3 x 95	8	Aire	-	1/2-3/4	65
EEP4330W1X	14.540	34,8	8	4.700	350	3 x 95	8	Aire	-	1/2-3/5	70

DIMENSIONS


EVAPORATOR

	A	B	C	D1	D2
084	284	853	796	582	810
094	310	853	796	582	810
154	307	853	1.203	982	810
214	307	853	1.612	1.382	810
330	310	848	1.900	1.731	790

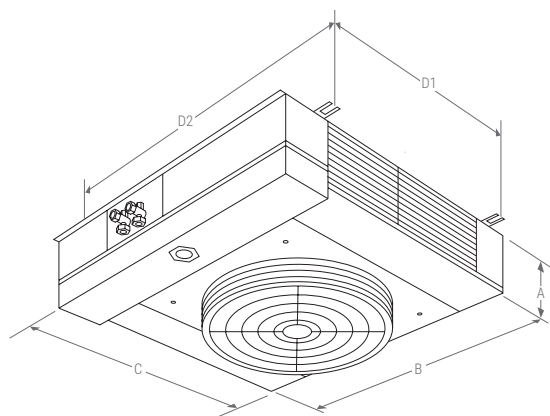

UNIT + EMB. / PACK.

	A	B	C	kg
084	315	940	1.330	35
094	315	940	1.330	35
154	315	940	1.330	55
214	315	940	1.730	65
330	315	940	1.730	110

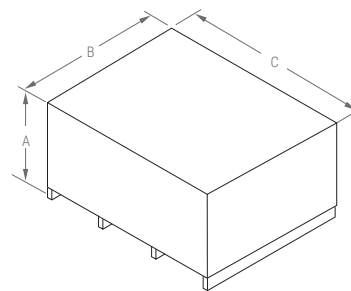

EVAPORATORS

EVAPORATOR SELECTION

Graphic 1: Relation between DT1 (°K) and relative humidity (%) inside the cold room.

Graphic 2: Correction factor Fc to be used according to the Te (°C) and DT1 (°K)

Tc: Cold room temperature (°C)

Te: Evaporation temperature (°C)

Qn: Evaporator nominal capacity (W)

Qe: Needs of evaporator
to be selected (W)

DT1: Difference between cold room
temperature and evaporation
temperature (°K)

RH: Relative Humidity inside the cold
room

Fc: Correction factor

Fr: Refrigerant factor
(R134A=0,9; R22=0,95;
R449A=1,05)

Example: Cold room must have a cooling
capacity of 6 000 W at 0 °C and a Relative
Humidity (RH) of 70%.
Refrigerator R494A

1° Graphic 1, for 70%, DT1 = 10


2° Cold room at 0 °C and DT1 = 10,
evaporation temperature -10 °C

3° Graphic 2, for Te = -10 °C y DT1 = 10,
Correction Factor 1,1


4° Calculate the nominal power with the
formula:

$$Q_n = Q_e / F_c / F_r = 6000 / 1,1 / 1,05 = 5194 \text{ W}$$

5° Select evaporator, model
EEC2236M1X

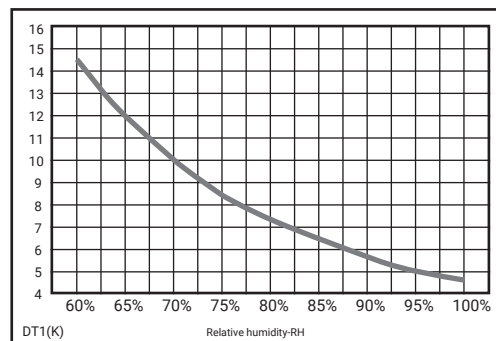


DT1 (graphic 1)

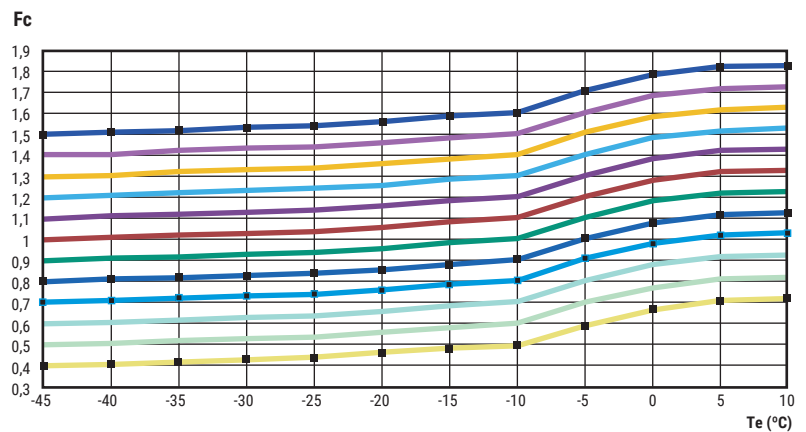

FC Correction factor
(graphic 2)

— D T1=15 — D T1=14 — D T1=15 — D T1=14
 — D T1=13 — D T1=12 — D T1=13 — D T1=12
 — D T1=11 — D T1=10 — D T1=11 — D T1=10

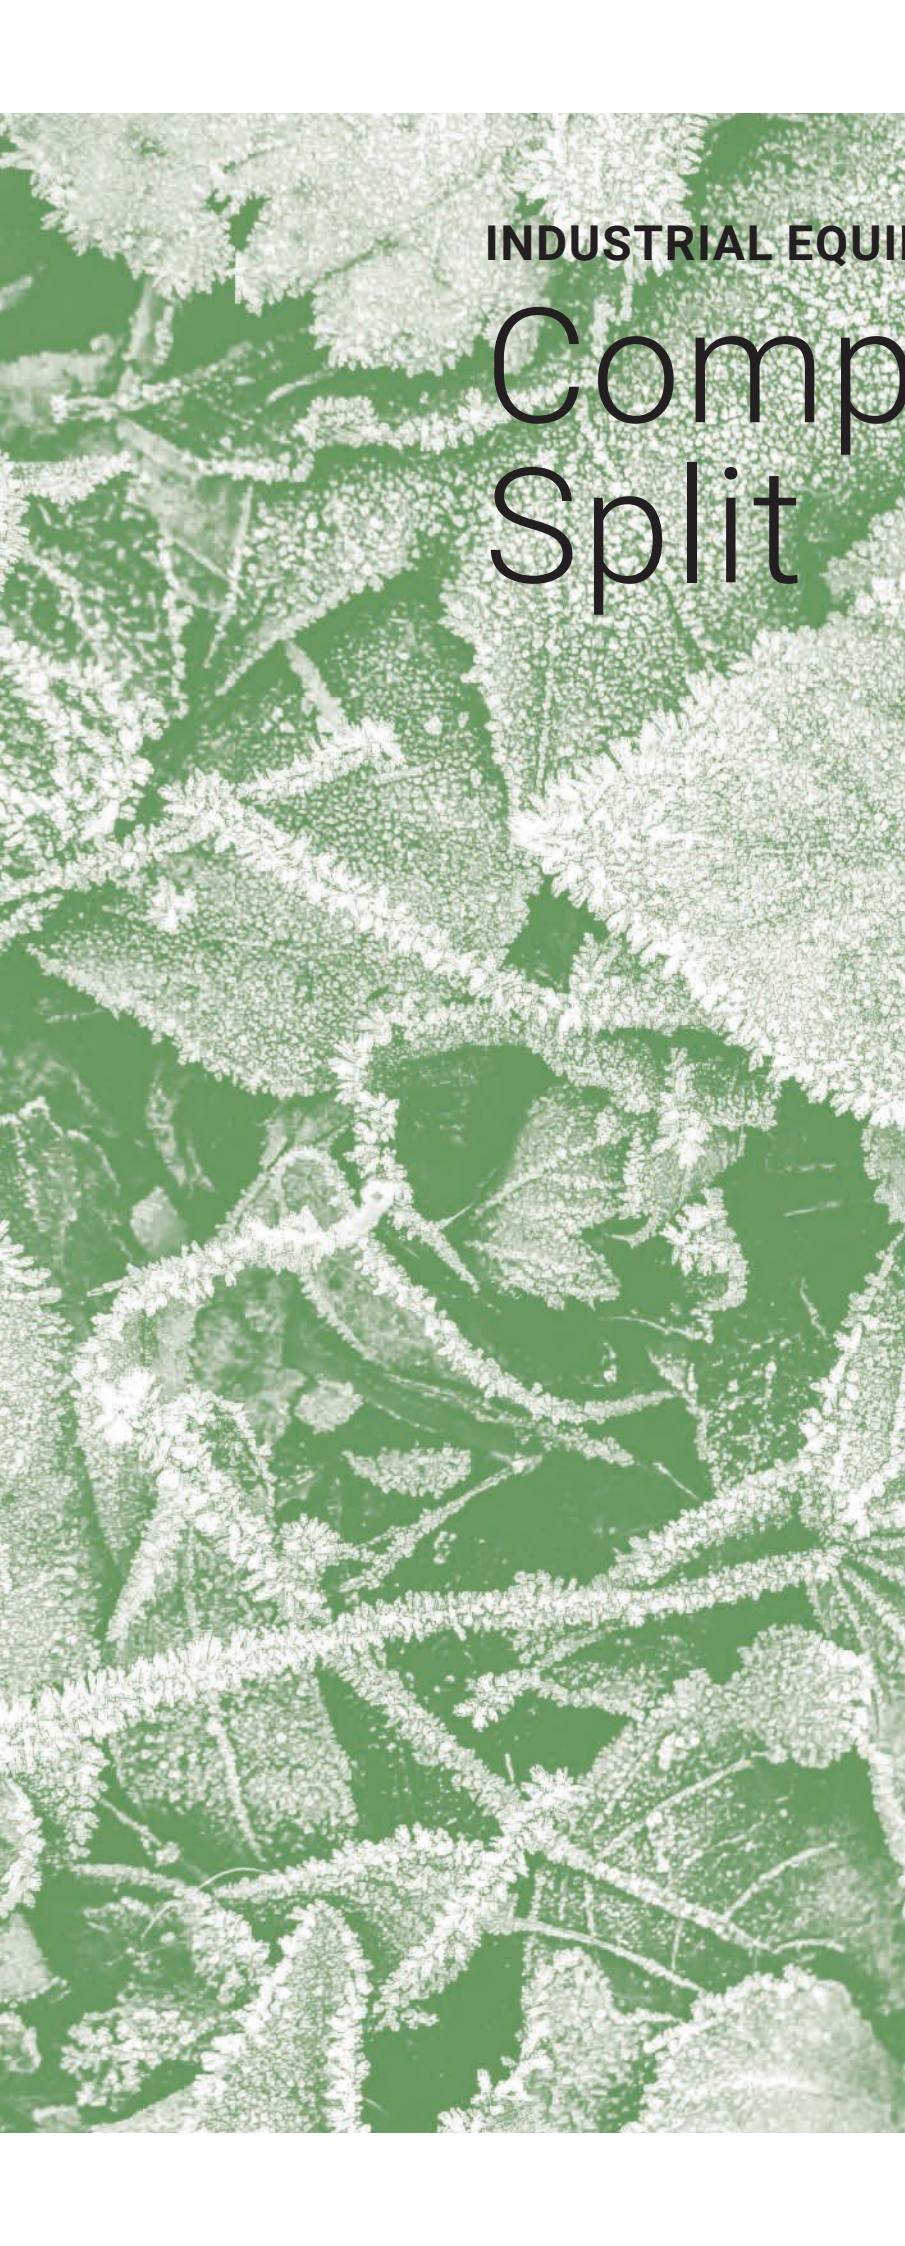

INDUSTRIAL EQUIPMENT

Compact / Split


- p. 112 **High temperature**
KPA · A2L / R-449A / R-513A
- p. 114 **Medium temperature**
KPM · A2L / R-449A / R-513A
- p. 116 **Medium temperature and high relative humidity**
KPMH · A2L / R-449A / R-513A
- p. 118 **Low temperature**
KPB · A2L / R-449A
- p. 120 **Frozen food preservation**
KPC · R-452A
- p. 122 **Freezing tunnel**
KPTC · A2L / R-452A / R-449A
- p. 124 **Two stage freezing tunnel**
KPDE · R-452A
- p. 126 **Medium-Low**
KPMB · A2L / R-449A
- p. 128 **Low-Medium**
KPBM · A2L / R-449A


PACK

INDUSTRIAL EQUIPMENT
HIGH TEMPERATURE
KPA

+15 °C

+5 °C



Compact / Split
 In compact units,
 only A2L refrigerant
 is available.



GENERAL CHARACTERISTICS

- Electronic expansion valve.
- Control of equipment operation by automaton.
- 5.7" touch screen.
- Suitable for cold-storage and processing rooms.
- Defrosting by air.
- Fin pitch = 5 mm.
- Highly optimized unit thanks to its high condensing surface and low consumption.
- 80 Pa pressure available for use with textil conduct.
- Given that these units operate in processing rooms or chambers at between +5 °C and +15 °C, no volumes are indicated. Please consult us.
- Ceiling or cubic ducted evaporators with textile duct for working rooms.
- Possibility of supplying textile ducts (optional).

KIDEPACK

Model	Refrigeration capacity	Compressor	Max. absorbed powerl	Box	Evaporator	Air flow
R-455A R-449A	Watts	HP	kW	Cond. / Evap.	m³/h	m
KPA-3	10.100	3 H	5,40	145	5.600	17
KPA-5	18.200	5 H	7,90	150	7.900	19
KPA-8	27.800	7,5 H	12,80	250	16.200	20
KPA-10	35.300	10 H	15,70	250	16.200	20
KPA-13	42.400	13 H	17,50	350	25.100	22
KPA-15	47.500	15 H	19,40	350	25.100	22
KPA-20	55.900	20 SH	24,50	350	25.100	22
KPA-25-s	70.200	25 SH	29,60	450 / 2 x 250	32.400	20
KPA-30-s	82.800	30 SH	33,50	450 / 2 x 350	50.200	22



TWO OPTIONS OF EVAPORATORS

Double flow evaporators in split version



Cubic evaporators in compact or split version



KIDEPACK


Condenser	Defrost	Diameter of pipes			Refrigeration Capacities under other conditions						Cold room	Model
m³/h	kW	Asp.	Liq.	Gas	T. ext. = +32 °C			T. ext. = +40 °C			m³ aprox.	R-455A R-449A
					+15 °C	+10 °C	+5 °C	+15 °C	+10 °C	-5 °C		
5.600	aire	1 1/8"	5/8"	-	10,1	8,9	7,7	9,4	8,5	7,6	-	KPA-3
7.600	aire	1 3/8"	5/8"	-	18,2	16,0	13,9	16,9	15,3	13,6	-	KPA-5
14.500	aire	1 3/8"	7/8"	-	27,8	24,4	21,2	25,7	23,3	20,8	-	KPA-8
15.000	aire	1 5/8"	7/8"	-	35,3	31,0	26,9	32,7	29,6	26,4	-	KPA-10
20.300	aire	1 5/8"	7/8"	-	42,4	37,3	32,4	39,3	35,6	31,8	-	KPA-13
20.300	aire	1 5/8"	7/8"	-	47,5	41,8	36,2	44,0	39,9	35,6	-	KPA-15
20.600	aire	2 1/8"	1 1/8"	-	55,9	49,1	42,7	51,8	46,9	41,9	-	KPA-20
30.000	aire	2 1/8"	1 1/8"	-	70,2	61,7	53,6	65,0	58,9	52,6	-	KPA-25-s
31.000	aire	2 1/8"	1 1/8"	-	82,8	72,8	63,2	76,7	69,5	62,0	-	KPA-30-s



INDUSTRIAL EQUIPMENT

MEDIUM
TEMPERATURE

KPM



Compact / Split

In compact units,
only A2L refrigerant
is available.



GENERAL CHARACTERISTICS

- Electronic expansion valve.
- Control of equipment operation by automaton.
- 5.7" touch screen.
- The basic range for coolrooms at around 0 °C.
- Defrosting by hot gas up to 30 HP.
- Fin pitch. = 5 mm.
- Models with two evaporators have electrical defrosting.
- Capacities up to 80,500 W with one single unit.
- A wide variety of models and powers for all kinds of applications at around 0 °C.

KIDEPACK

Model	Refrigeration capacity	Compressor	Max. absorbed powerl	Box	Evaporator	Air flow
R-455A R-449A	Watts	HP	kW	Cond. / Evap.	m³/h	m
KPM-4	7.300	4 H	5,70	145	5.600	17
KPM-5	9.400	5 H	7,20	150	7.900	19
KPM-6	12.500	6 H	9,00	150	7.900	19
KPM-8	14.600	8 H	10,40	150	7.900	19
KPM-10	18.700	10 H	14,30	250	16.200	20
KPM-13	23.900	13 H	17,80	250	16.200	20
KPM-15	27.200	15 H	16,80	250	16.200	20
KPM-20	31.900	20 SH	22,90	350	25.100	22
KPM-25	39.600	25 SH	26,30	350	25.100	22
KPM-30	44.800	30 SH	29,00	350	25.100	22
KPM-35-s	58.500	35 SH	37,60	450 / 2 x 250	32.400	20
KPM-40-s	67.900	40 SH	44,10	450 / 2 x 350	50.200	22
KPM-50-s	80.500	50 SH	54,20	450 / 2 x 350	50.200	22



EVAPORATOR OPTION



Cubic evaporators


KIDEPACK

Condenser	Defrost	Diameter of pipes			Refrigeration Capacities under other conditions								Cold room	Model	
m³/h	kW	Asp.	Liq.	Gas	T. ext. = +32 °C				T. ext. = +40 °C				m³ aprox.	R-455A	R-449A
					+10 °C	+5 °C	0 °C	-5 °C	+10 °C	+5 °C	0 °C	-5 °C			
5.600	gaz	1 1/8"	1/2"	5/8"	9,6	8,5	7,3	6,3	8,8	7,8	6,7	5,7	150	KPM-4	
7.200	gaz	1 1/8"	5/8"	7/8"	12,3	10,9	9,4	8,1	11,3	10,0	8,6	7,3	200	KPM-5	
7.200	gaz	1 3/8"	5/8"	7/8"	16,2	14,5	12,5	10,7	15,0	13,3	11,5	9,7	270	KPM-6	
7.200	gaz	1 3/8"	5/8"	7/8"	19,1	16,9	14,6	12,5	17,6	15,5	13,4	11,4	330	KPM-8	
14.400	gaz	1 3/8"	7/8"	1 1/8"	24,5	21,6	18,7	16,0	22,5	19,9	17,2	14,6	440	KPM-10	
14.800	gaz	1 5/8"	7/8"	11/8"	31,3	27,7	23,9	20,5	28,8	25,4	21,9	18,6	590	KPM-13	
14.800	gaz	1 5/8"	7/8"	1 1/8"	35,6	31,5	27,2	23,3	32,7	28,9	25,0	21,2	700	KPM-15	
20.000	gaz	1 5/8"	7/8"	1 1/8"	41,7	36,9	31,9	27,3	38,4	33,9	29,3	24,8	860	KPM-20	
20.000	gaz	2 1/8"	7/8"	1 1/8"	51,8	45,8	39,6	33,9	47,6	42,1	36,4	30,8	1.140	KPM-25	
20.300	gaz	2 1/8"	1 1/8"	1 3/8"	58,6	51,8	44,8	38,4	53,9	47,6	41,1	34,9	1.340	KPM-30	
30.000	23,3	2 1/8"	1 1/8"	-	76,5	67,7	58,5	50,1	70,4	62,2	53,7	45,5	1.850	KPM-35-s	
31.000	28,4	2 1/8"	1 1/8"	-	88,8	78,6	67,9	58,1	81,7	72,2	62,3	52,8	2.230	KPM-40-s	
32.000	35,2	2 5/8"	1 1/8"	-	105,3	93,1	80,5	68,9	96,8	85,6	73,9	62,6	2.760	KPM-50-s	



INDUSTRIAL EQUIPMENT

MEDIUM TEMPERATURE AND HIGH RELATIVE HUMIDITY KPMH



Compact / Split

In compact units,
only A2L refrigerant
is available.



GENERAL CHARACTERISTICS

- Electronic expansion valve.
- Control of equipment operation by automaton.
- 5.7" touch screen.
- Specially designed for vegetables, long-term fruit storage and meat blast chillerà.
- Thanks to a larger evaporating surface than the KPM models, maintains a higher relative humidity in the cold room.
- Defrosting by hot gas up to 22 HP.
- Fin pitch = 5 mm.
- Larger surface area in evaporator coil.
- High RH in the room.
- Smaller ΔT .
- Models with two evaporators have electrical defrosting.

KIDEPACK

Model	Refrigeration capacity	Compressor	Max. absorbed powerl	Box	Evaporator	Air flow
R-455A R-449A	Watts	HP	kW	Cond. / Evap.	m³/h	m
KPMH-3	5.700	3 H	5,00	145	5.600	17
KPMH-4	8.000	4 H	5,80	150	7.900	19
KPMH-5	10.300	5 H	7,20	150	7.900	19
KPMH-6	14.100	6 H	10,50	250	16.200	20
KPMH-8	16.600	8 H	11,90	250	16.200	20
KPMH-10	21.400	10 H	14,30	250	16.200	20
KPMH-13	26.500	13 H	19,20	350	25.100	22
KPMH-15	29.300	15 H	18,20	350	25.100	22
KPMH-20	34.500	20 SH	21,00	350	25.100	22
KPMH-22	39.600	20 SH	22,60	350	27.000	25
KPMH-25-s	44.200	25 SH	27,70	450 / 2 x 250	32.400	20
KPMH-30-s	50.100	30 SH	31,80	450 / 2 x 350	50.200	22
KPMH-35-s	65.200	35 SH	39,00	450 / 2 x 350	50.200	22
KPMH-40-s	75.100	40 SH	44,10	450 / 2 x 350	54.000	25



EVAPORATOR OPTION




KIDEPACK

Condenser	Defrost	Diameter of pipes			Refrigeration Capacities under other conditions						Cold room	Model
m³/h	kW	Asp.	Liq.	Gas	T. ext. = +32 °C			T. ext. = +40 °C			m³ aprox.	R-455A R-449A
					+5 °C	0 °C	-5 °C	+5 °C	0 °C	-5 °C		
5.600	gas	7/8"	1/2"	5/8"	6,6	5,7	4,8	6,1	5,2	4,4	110	KPMH-3
7.000	gas	1 1/8"	1/2"	5/8"	9,3	8,0	6,8	8,6	7,3	6,2	160	KPMH-4
7.000	gas	1 1/8"	5/8"	7/8"	12,0	10,3	8,7	11,0	9,4	7,9	210	KPMH-5
14.000	gas	1 3/8"	5/8"	7/8"	16,4	14,1	11,9	15,1	12,9	10,9	300	KPMH-6
14.200	gas	1 3/8"	5/8"	7/8"	19,3	16,6	14,0	17,8	15,2	12,8	350	KPMH-8
14.400	gas	1 3/8"	7/8"	1 1/8"	24,9	21,4	18,1	22,9	19,6	16,5	470	KPMH-10
20.000	gas	1 5/8"	7/8"	1 1/8"	30,8	26,5	22,4	28,4	24,3	20,4	620	KPMH-13
20.000	gas	1 5/8"	7/8"	1 1/8"	34,0	29,3	24,8	31,4	26,8	22,6	700	KPMH-15
20.000	gas	1 5/8"	7/8"	1 1/8"	40,1	34,5	29,2	36,9	31,6	26,6	850	KPMH-20
20.000	gas	2 1/8"	7/8"	1 1/8"	46,0	39,6	33,5	42,4	36,2	30,5	1.020	KPMH-22
30.000	23.3	2 1/8"	7/8"	-	51,3	44,2	37,4	47,3	40,4	34,0	1.170	KPMH-25-s
30.000	28.4	2 1/8"	1 1/8"	-	58,2	50,1	42,3	53,6	45,8	38,6	1.390	KPMH-30-s
31.000	31.8	2 1/8"	1 1/8"	-	75,7	65,2	55,1	69,8	59,7	50,2	1.950	KPMH-35-s
32.000	38.6	2 5/8"	1 1/8"	-	87,2	75,1	63,5	80,4	68,7	57,8	2.330	KPMH-40-s



INDUSTRIAL EQUIPMENT

LOW TEMPERATURE KPB



Compact / Split

In compact units,
only A2L refrigerant
is available.



R-454C R-449A
R-455A



GENERAL CHARACTERISTICS

- Electronic expansion valve.
 - Control of equipment operation by automaton.
 - 5.7" touch screen.
 - Suitable for the preservation of frozen products in general.
 - Hot gas defrosting up to 40 HP.
 - Evaporator fin pitch = 5 mm.
 - Cooling capacity up to 65.600 W.
 - High C.O.P.
 - Models with two evaporators have electrical defrosting.
 - Possibility of R-452A.
- For chambers between -22/-25 °C with A2L refrigerants consult the technical office.

KIDEPACK

Model	Refrigeration capacity	Compressor	Max. absorbed powerl	Box	Evaporator	Air flow
R-455A R-449A	Watts	HP	kW	Cond. / Evap.	m³/h	m
KPB-3	4.200	3 SH	5,10	145	5.600	17
KPB-4	5.100	4 SH	6,10	145	5.600	17
KPB-5	6.200	5 SH	7,00	145	5.600	17
KPB-7	7.200	6 SH	8,10	150	7.900	19
KPB-8	9.100	9 SH	9,40	150	7.900	19
KPB-10	10.400	12 SH	9,70	150	7.900	19
KPB-15	15.700	15 SH	18,00	250	16.200	20
KPB-20	18.700	20 SH	20,40	250	16.200	20
KPB-25	23.400	25 SH	24,80	250	16.200	20
KPB-30	27.900	30 SH	31,20	350	25.100	22
KPB-40	33.100	40 SH	36,50	350	25.100	22
KPB-50-s	46.300	50 SH *	48,60	450 / 2 x 250	32.400	20
KPB-60-s	55.200	60 SH *	60,80	450 / 2 x 350	50.200	22
KPB-80-s	65.600	80 SH *	69,60	450 / 2 x 350	50.200	22

* With two compressors



EVAPORATOR OPTION



Cubic evaporators

KIDEPACK


Condenser	Defrost	Diameter of pipes			Refrigeration Capacities under other conditions						Cold room	Model
m³/h	kW	Asp.	Liq.	Gas	T. ext. = +32 °C			T. ext. = +40 °C			m³ aprox.	R-455A R-449A
					-15 °C	-20 °C	-25 °C	-15 °C	-20 °C	-25 °C		
5.600	gas	1 1/8"	1/2"	5/8"	4,9	4,2	3,5	4,4	3,7	3,2	90	KPB-3
5.600	gas	1 1/8"	1/2"	5/8"	6,0	5,1	4,2	5,3	4,5	3,9	120	KPB-4
5.600	gas	1 3/8"	1/2"	7/8"	7,3	6,2	5,2	6,5	5,5	4,7	150	KPB-5
7.200	gas	1 3/8"	1/2"	7/8"	8,4	7,2	6,0	7,5	6,3	5,5	190	KPB-7
7.400	gas	1 3/8"	5/8"	7/8"	10,7	9,1	7,6	9,5	8,0	6,9	260	KPB-8
7.600	gas	1 5/8"	5/8"	7/8"	12,2	10,4	8,6	10,8	9,2	7,9	320	KPB-10
14.600	gas	1 5/8"	5/8"	7/8"	18,4	15,7	13,0	16,3	13,8	11,9	550	KPB-15
14.800	gas	2 1/8"	7/8"	7/8"	21,9	18,7	15,5	19,5	16,5	14,2	700	KPB-20
15.000	gas	2 1/8"	7/8"	7/8"	27,4	23,4	19,4	24,3	20,6	17,8	950	KPB-25
20.600	gas	2 1/8"	7/8"	1 1/8"	32,6	27,9	23,2	29,0	24,6	21,2	1.200	KPB-30
20.800	gas	2 5/8"	7/8"	1 1/8"	38,7	33,1	27,5	34,4	29,1	25,2	1.480	KPB-40
30.000	28,3	2 5/8"	7/8"	-	54,2	46,3	38,4	48,2	40,7	35,2	2.250	KPB-50-s
31.000	35,5	3 1/8"	1 1/8"	-	64,6	55,2	45,8	57,4	48,6	42,0	2.820	KPB-60-s
32.000	45,3	3 1/8"	1 1/8"	-	76,8	65,6	54,5	68,2	57,7	49,9	3.530	KPB-80-s



INDUSTRIAL EQUIPMENT

FROZEN FOOD PRESERVATION

KPC



Split

R-452A



GENERAL CHARACTERISTICS

- Electronic expansion valve.
- Control of equipment operation by automaton.
- 5.7" touch screen.
- Suitable to store frozen products at very low temperatures.
- Can be used as freezing room units.
- Defrosting by hot gas up to 45 HP.
- Fin pitch = 7 mm.
- Models with two evaporators have electrical defrosting.

KIDEPACK

Model	Refrigeration capacity	Compressor	Max. absorbed powerl	Box	Evaporator	Air flow
R-452A	Watts	HP	kW	Cond. / Evap.	m³/h	m
KPC-6	3.300	5,5 SH	7,00	145	5.800	18
KPC-8	3.900	7,5 SH	8,00	145	5.800	18
KPC-10	6.300	12 SH	9,70	150	8.000	19
KPC-13	7.600	15 SH	11,70	150	8.000	19
KPC-20	12.000	17 SH	20,40	250	16.500	21
KPC-25	15.200	25 SH	24,50	250	16.500	21
KPC-40	21.700	40 SH	36,50	350	25.300	22
KPC-45	26.200	45 SH	38,20	350	25.300	22
KPC-60-s	34.900	54 SH *	60,70	450 / 2 x 350	50.600	22
KPC-80-s	41.800	80 SH *	71,40	450 / 2 x 350	50.600	22

* With two compressors



EVAPORATOR OPTION



KIDEPACK

Condenser	Defrost	Diameter of pipes			Refrigeration Capacities under other conditions kW						Cold room	Model
m³/h	kW	Suct.	Liq.	Gas	T, ext, = +32 °C			T, ext, = +40 °C			m³ aprox,	R-452A
					-25 °C	-30 °C	-35 °C	-25 °C	-30 °C	-35 °C		
5.600	gas	1 1/8"	1/2"	5/8"	4,0	3,3	2,6	3,5	2,9	2,3	80	KPC-6
5.600	gas	1 3/8"	1/2"	5/8"	4,7	3,9	3,1	4,1	3,4	2,7	100	KPC-8
7.000	gas	1 5/8"	1/2"	7/8"	7,6	6,3	4,9	6,7	5,5	4,4	170	KPC-10
7.200	gas	1 5/8"	1/2"	7/8"	9,1	7,6	6,0	8,1	6,6	5,3	210	KPC-13
14.200	gas	2 1/8"	5/8"	7/8"	14,4	12,0	9,5	12,7	10,4	8,4	370	KPC-20
14.600	gas	2 1/8"	5/8"	7/8"	18,2	15,2	12,0	16,1	13,2	10,6	500	KPC-25
20.000	gas	2 5/8"	7/8"	1 1/8"	26,0	21,7	17,1	23,0	18,9	15,2	760	KPC-40
20.300	gas	2 5/8"	7/8"	1 1/8"	31,4	26,2	20,7	27,8	22,8	18,3	970	KPC-45
30.000	38,6	2 5/8"	7/8"	-	41,9	34,9	27,6	37,0	30,4	24,4	1.420	KPC-60-s
30.000	45,3	3 1/8"	7/8"	-	50,1	41,8	33,0	44,3	36,4	29,3	1.780	KPC-80-s



INDUSTRIAL EQUIPMENT

FREEZING TUNNEL

KPTC



Compact / Split

In compact units,
only A2L refrigerant
is available.




GENERAL CHARACTERISTICS

- Electronic expansion valve.
- Control of equipment operation by automaton.
- 5.7" touch screen.
- Units for freezing tunnels.
- One stage compressors.
- Defrosting by hot gas up to 45 HP.
- Fin pitch = 10 mm.
- Air pressures available up to 135 Pa.
- Models with two evaporators have electrical defrosting.
- Industrial cubic, wall or ceiling evaporators for freezing tunnels.

KIDEPACK

Model	Refrigeration capacity	Compressor	Max. absorbed powerl	Box	Evaporator	Air flow
R-455A R-452A	Watts	HP	kW	Cond. / Evap.	m³/h	m
KPTC-6	4.100	5,5 SH	7,00	145	5.900	80
KPTC-13	8.800	15 SH	14,30	150	8.200	130
KPTC-30	17.700	30 SH	31,20	250	16.800	125
KPTC-40	24.000	40 SH	38,60	350	25.500	120
KPTC-45	29.100	45 SH	45,80	350	25.500	120
KPTC-60-s	35.400	60 TSH *	62,00	450 / 2 x 250	33.600	125
KPTC-80-s	48.000	80 TSH *	75,50	450 / 2 x 350	51.000	120
KPTC-90-s	58.200	90 TSH *	89,90	450 / 2 x 350	51.000	120

* With two compressors

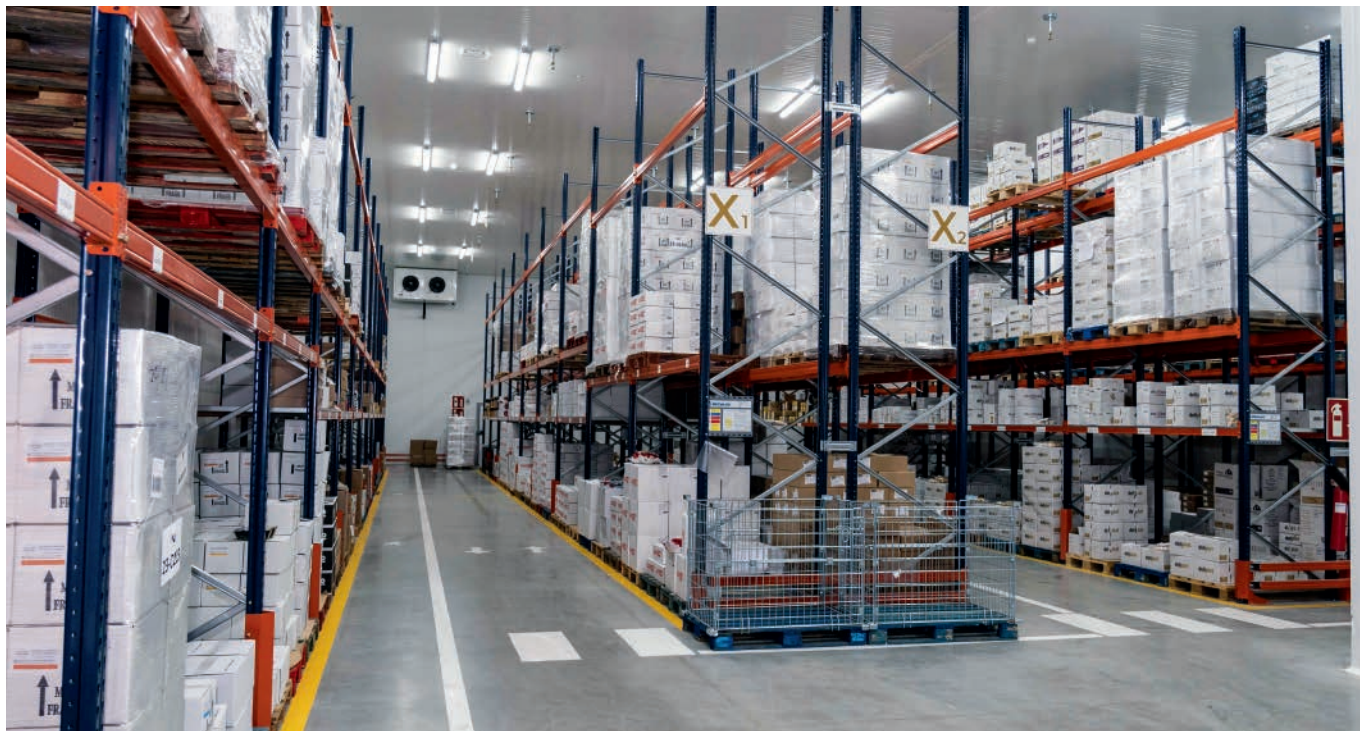


TWO OPTIONS OF EVAPORATORS

Evaporators cubic



Floor evaporator

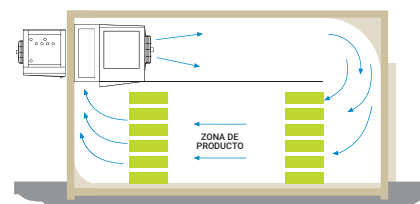

KIDEPACK


Condenser	Defrost	Diameter of pipes			Refrigeration Capacities under other conditions kW						Freezing capacity	Model
m³/h	kW	Asp.	Liq.	Gas	T. ext. = +32 °C			T. ext. = +40 °C			m³ aprox.	R-455A R-452A
					-25 °C	-30 °C	-35 °C	-25 °C	-30 °C	-35 °C		
5.600	gas	1 3/8"	1/2"	5/8"	4,9	4,1	3,2	4,3	3,5	2,7	700	KPTC-6
7.200	gas	1 5/8"	5/8"	1 1/8"	10,4	8,8	7,0	9,3	7,5	5,9	1.500	KPTC-13
14.800	gas	2 1/8"	5/8"	1 1/8"	21,0	17,7	14,0	18,6	15,1	11,9	3.040	KPTC-30
20.300	gas	2 5/8"	7/8"	1 1/8"	29,1	24,0	19,4	25,7	20,8	16,3	4.100	KPTC-40
20.600	gas	2 5/8"	7/8"	1 3/8"	34,6	29,1	23,0	30,6	24,7	19,5	5.000	KPTC-45
30.000	33,2	2 5/8"	7/8"	-	42,0	35,4	28,0	37,2	30,2	23,8	6.080	KPTC-60-s
31.000	45,3	3 1/8"	1 1/8"	-	58,2	48,0	38,8	51,4	41,6	32,6	8.200	KPTC-80-s
32.000	48,7	3 1/8"	1 1/8"	-	69,3	58,2	46,0	61,1	49,5	38,9	10.000	KPTC-90-s



INDUSTRIAL EQUIPMENT

TWO STAGE FREEZING TUNNEL

KPDE



R-452A




GENERAL CHARACTERISTICS

- Electronic expansion valve.
- Control of equipment operation by automaton.
- 5.7" touch screen.
- Two stage compressor units with sub-cooler for freezing tunnels.
- Electrical defrosting.
- Fin pitch = 10 mm.
- With liquid separator.
- Air pressures available up to 135 Pa.

KIDEPACK

Model	Refrigeration capacity	Compressor	Max. absorbed powerl	Box	Evaporator	Air flow
R-452A	Watts	HP	kW	Cond. / Evap.	m³/h	m
KPDE-8-s	7.200	7,5 DE	10,90	150	8.200	130
KPDE-13-s	11.200	12,5 DE	17,30	250	16.800	135
KPDE-20-s	18.500	20 DE	25,20	250	16.800	125
KPDE-30-s	24.900	30 DE	36,10	350	25.500	120
KPDE-40-s	37.000	40 TDE *	50,10	450 / 2 x 250	33.600	125
KPDE-60-s	49.800	60 TDE *	70,50	450 / 2 x 350	51.000	120

* With two compressors

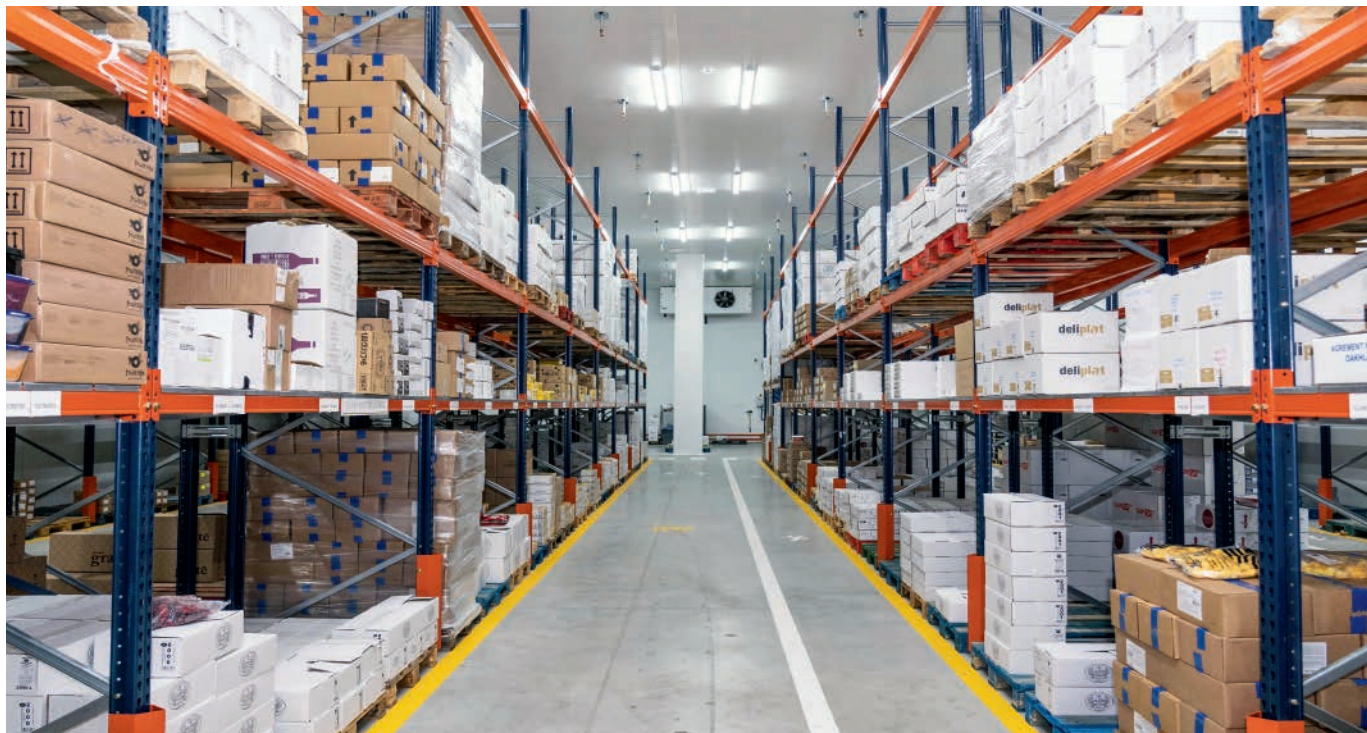

TWO OPTIONS OF EVAPORATORS

Evaporators cubic



Floor evaporator



KIDEPACK


Condenser	Defrost	Diameter of pipes			Refrigeration Capacities under other conditions								Freezing capacity	Model
m³/h	kW	Asp.	Liq.	Gas	T. ext. = +32 °C				T. ext. = +40 °C				m³ aprox.	R-452A
					-25 °C	-30 °C	-35 °C	-40 °C	-25 °C	-30 °C	-35 °C	-40 °C		
7.000	7,8	1 5/8"	1/2"	-	8,6	7,2	5,8	4,5	7,6	6,2	4,9	3,7	1.230	KPDE-8-s
14.200	13,3	2 1/8"	5/8"	-	13,3	11,2	9,0	7,1	11,8	9,6	7,6	5,7	1.920	KPDE-13-s
14.800	17,2	2 1/8"	7/8"	-	22,0	18,5	14,8	11,7	19,4	15,8	12,6	9,4	3.170	KPDE-20-s
20.300	23,4	2 5/8"	7/8"	-	29,6	24,9	19,9	15,7	26,1	21,3	16,9	12,7	4.270	KPDE-30-s
30.000	33,2	2 5/8"	7/8"	-	44,0	37,0	29,6	23,3	38,9	31,6	25,2	18,9	6.340	KPDE-40-s
31.000	45,3	3 1/8"	1 1/8"	-	59,3	49,8	39,8	31,4	52,3	42,6	33,9	25,4	8.540	KPDE-60-s


PACK

INDUSTRIAL EQUIPMENT
MEDIUM-LOW
DUAL-TEMPERATURE
KPMB

+10 °C

-25 °C



Compact / Split
 In compact units,
 only A2L refrigerant
 is available.




GENERAL CHARACTERISTICS

- Electronic expansion valve.
- Control of equipment operation by automaton.
- 5.7" touch screen.
- Dual-temperature units capable to operate in cold room temperatures between +10 °C and –25 °C. But mostly middle T^a.
- Electrical defrosting.
- Fin pitch = 5 mm.
- For the storage of refrigerated and frozen goods.
- Wide range of models and applications.

KIDEPACK

Model	Refrigeration capacity		Compressor	Max. absorbed power ^l	Box	Evaporator	Air flow
R-455A R-449A	Watts		HP	kW	Cond. / Evap.	m³/h	m
	0 °C	-20 °C					
KPMB-6	9.900	5.700	5 SH	6,70	150	7.900	19
KPMB-8	15.100	8.600	7,5 SH	9,50	150	7.900	19
KPMB-13	22.400	12.800	12,5 SH	13,90	250	16.200	20
KPMB-15	26.500	15.100	15 SH	15,40	250	16.200	20
KPMB-20	29.000	16.600	20 SH	18,20	250	16.200	20
KPMB-25	35.500	20.300	25 SH	25,00	350	25.100	22
KPMB-30	44.000	25.200	30 SH	27,70	350	25.100	22
KPMB-40-s	62.800	35.900	40 SH	42,70	450 / 2 x 250	32.400	20
KPMB-50-s	76.800	43.900	50 SH	54,20	450 / 2 x 350	50.200	22

* With two compressors

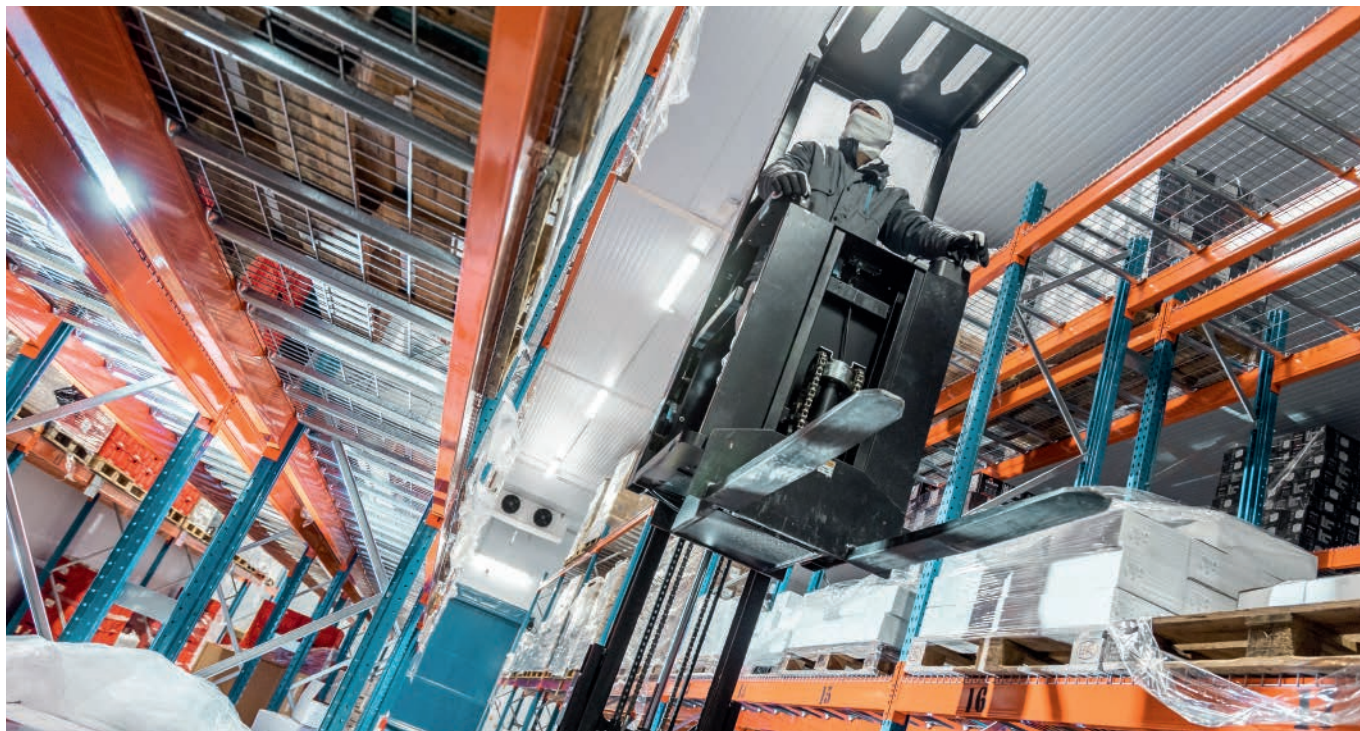

EVAPORATOR OPTION



KIDEPACK

Condenser	Defrost	Diameter of pipes			Refrigeration Capacities under other conditions								Cold room	Model
m³/h	kW	Asp.	Liq.	Gas	T. ext. = +32 °C				T. ext. = +40 °C				m³ aprox.	R-455A R-449A
					+10 °C	-0 °C	-20 °C	-25 °C	+10 °C	-0 °C	-20 °C	-25 °C		
7.200	5,3	1 1/8"	5/8"	-	12,6	9,9	5,7	4,6	11,9	9,1	5,2	4,2	220 / 150	KPMB-6
7.400	7,0	1 3/8"	5/8"	-	19,2	15,1	8,6	7,1	18,1	13,9	7,9	6,4	370 / 250	KPMB-8
14.600	11,1	1 5/8"	7/8"	-	28,5	22,4	12,8	10,5	26,9	20,6	11,7	9,5	600 / 410	KPMB-13
14.800	13,3	1 5/8"	7/8"	-	33,7	26,5	15,1	12,4	31,8	24,3	13,8	11,3	730 / 510	KPMB-15
15.000	14,7	1 5/8"	7/8"	-	36,8	29,0	16,6	13,6	34,8	26,6	15,1	12,3	820 / 570	KPMB-20
20.000	16,7	2 1/8"	7/8"	-	45,1	35,5	20,3	16,6	42,6	32,6	18,5	15,1	1.040 / 750	KPMB-25
20.300	20,1	2 1/8"	7/8"	-	55,9	44,0	25,2	20,6	52,8	40,4	22,8	18,7	1.360 / 1.010	KPMB-30
30.000	28,8	2 1/8"	1 1/8"	-	79,8	62,8	35,9	29,6	75,4	57,7	32,7	26,7	2.060 / 1.620	KPMB-40-s
31.000	31,8	2 5/8"	1 1/8"	-	97,6	76,8	43,9	35,9	92,2	70,5	39,9	32,6	2.600 / 2.110	KPMB-50-s

PACK

INDUSTRIAL EQUIPMENT
LOW-MEDIUM
DUAL-TEMPERATURE
KPBM

-25 °C
+5 °C

-25 °C
-20 °C
-15 °C
-10 °C
-5 °C
0 °C
5 °C

Compact / Split
In compact units,
only A2L refrigerant
is available.



GENERAL CHARACTERISTICS

- Electronic expansion valve.
- Control of equipment operation by automaton.
- 5.7" touch screen.
- Dual-temperature units capable to operate in cold room temperatures between -25 °C and $+5\text{ °C}$. But mostly low T^a .
- Electrical defrosting.
- Fin pitch = 5 mm.
- For the storage of refrigerated and frozen goods.
- Wide range of models and applications.

KIDEPACK

Model	Refrigeration capacity		Compressor	Max. absorbed powerI	Box	Evaporator	Air flow
R-455A R-449A	Watts		HP	kW	Cond, / Evap,	m³/h	m
	0 °C	-20 °C					
KPBM-8	11.000	9.100	7,5 SH	13,30	150	7.900	19
KPBM-10	12.700	10.400	12 SH	14,50	150	7.900	19
KPBM-15	19.400	15.700	15 SH	24,00	250	16.200	20
KPBM-20	22.800	18.700	20 SH	28,20	250	16.200	20
KPBM-30	37.700	30.700	30 SH	46,20	350	25.100	22
KPBM-40	45.000	36.600	40 SH	54,60	350	25.100	22
KPBM-100-s	85.800	69.700	100 SH *	100,20	450 / 2 x 350	50.200	22

* With two compressors



EVAPORATOR OPTION



KIDEPACK

Condenser	Defrost	Diameter of pipes			Refrigeration Capacities under other conditions								Cold room	Model
m³/h	kW	Asp.	Liq.	Gas	T. ext. = +32 °C				T. ext. = +40 °C				m³ aprox.	R-455A R-449A
					-25 °C	-20 °C	0 °C	+10 °C	-25 °C	-20 °C	0 °C	+10 °C		
7.400	6,2	1 3/8"	5/8"	-	7,6	9,1	11,0	12,7	6,75	8,0	10,1	11,7	270 / 260	KPBM-8
7.600	7,8	1 5/8"	5/8"	-	8,6	10,4	12,7	14,7	7,7	9,2	11,7	13,5	320 / 300	KPBM-10
14.800	9,8	1 5/8"	5/8"	-	13,0	15,7	19,4	22,5	11,9	13,8	17,8	20,6	530 / 500	KPBM-15
15.000	12,2	2 1/8"	7/8"	-	15,5	18,7	22,8	26,4	14,2	16,5	20,9	24,2	660 / 610	KPBM-20
20.600	18,4	2 1/8"	7/8"	-	25,5	30,7	37,7	43,6	23,2	27,0	34,6	40,1	1.310 / 1.120	KPBM-30
20.800	23,4	2 5/8"	7/8"	-	30,4	36,6	45,0	52,1	27,8	32,2	41,3	47,8	1.650 / 1.390	KPBM-40
32.000	45,3	3 1/8"	1 1/8"	-	57,9	69,7	85,8	99,3	53,0	61,3	78,8	91,2	3.500 / 2.940	KPBM-100-s

INDUSTRIAL EQUIPMENT

GENERAL CHARACTERISTICS


- Personalised study for each project.
- Refrigeration units for **R-452A** **R-454C** **R-455A** **R-449A** **R-513A**.
- Monoblock or Split units.
- Scroll or semi-hermetic compressors from top brands.
- Electronic expansion valve.
- Hot gas defrosting or electric defrosting.



CONTROL SYSTEMS & OPTIONS

Model		Model
Touch screen for remote control. Remote display KP-180		Maximum for 4 units in the same room
Other voltages and frequencies		
Heaters venturi evaporator		
EC condenser fans		
Long-range fan with directional vane. Maximum distance 34 m.		
Resistors. Self-regulating drainag		Maximum for 4 units in the same room
		Vertical condenser air outlet
		Anti-corrosion treatment on condenser / evaporator coil.
		Panel separator - Work wall
		Special wooden cage packaging to ship in container
		Oil separator
		Suction separator
		Condensate pump (KPA)
		Stainless steel condensing unit cabinet



MONITORING AND CONTROL SYSTEM. See page 69.

Model	Units	Characteristics	Requires
		Alarm or message via E-mail (sms) in case of breakdown. Management, monitoring and record.	
XWEB300D-PRO 8D000P	Up to 18 units	With DIN rail - Voltage 110-230 V	ADSL and Router
XWEB500D-PRO 8F000P	Up to 36 units	With DIN rail - Voltage 110-230 V	ADSL and Router
XWEB500D-PRO 8L000P	Up to 75 units	With DIN rail - Voltage 110-230 V	ADSL and Router



DIMENSIONS

COMPACT



Box
145
150



Box
250




Box
350

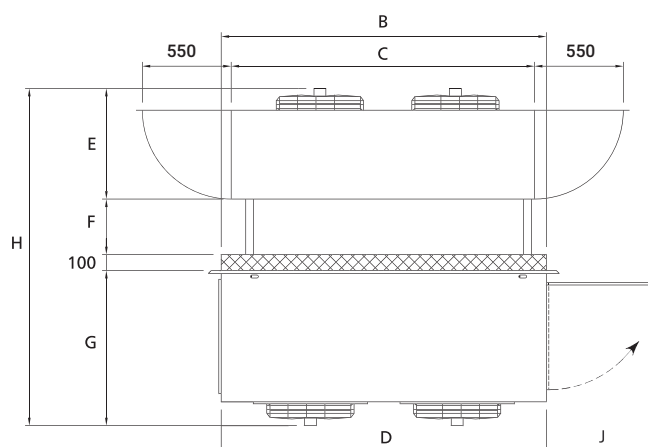


Box	Dimensions (mm)												Fan	Weight
	A*	B*	C	D	E	F	G	H	I	J	K	L		kg
145	730	1.190	1.140	1.175	580	300	775	1.755	790	550	790	1.375	1xØ450	240 / 330
150	850	1.350	1.330	1.320	700	300	865	1.965	910	610	910	1.520	1xØ500	320 / 510
250	1.100	2.075	2.020	2.050	700	350	990	2.140	1.005	760	1.260	2.245	2xØ500	550/ 820
350	1.220	2.710	2.625	2.650	700	400	990	2.190	1.005	760	1.361	2.850	3xØ500	940 / 1.100

SPLIT VERSION
CONDENSING UNIT

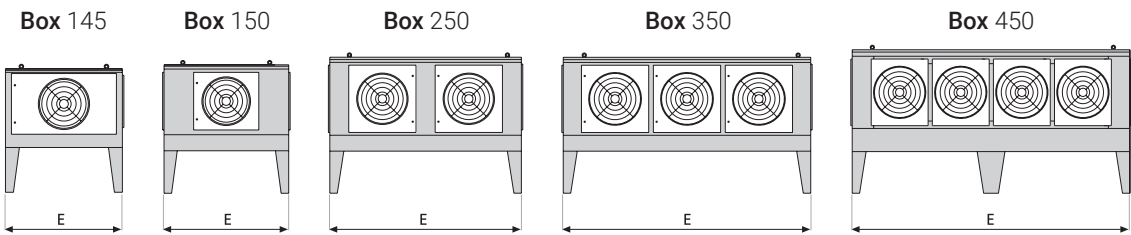


Box	Dimensions (mm)					Weight
	A	B	C	D	E	kg
145	1.240	790	775	610	1.175	180 / 250
150	1.360	910	865	700	1.320	290 / 460
250	1.455	1.005	990	825	2.050	380 / 600
350	1.455	1.005	990	825	2.650	580 / 830
450	1.550	1.100	1.265	1.100	3.000	1.000 / 1.200

VERTICAL AIR OUTLET OPTION

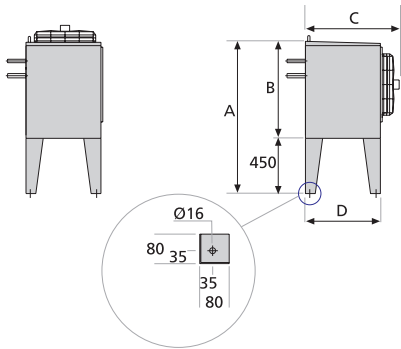


EVAPORATORS

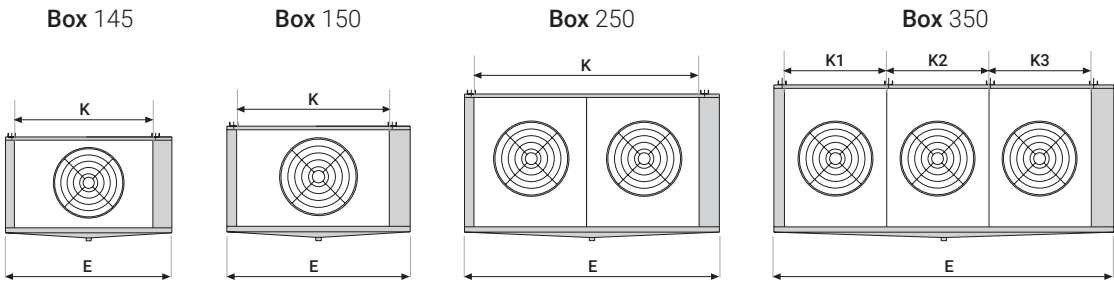


Dimensions (mm)

Box											Weight
	A	C	D	E	F	G	K	K1	K2	K3	kg
145	740	580	525	1.140	880	300	980	-	-	-	70 / 90
150	860	700	635	1.330	1.050	350	1.150	-	-	-	90 / 120
250	1.100	700	635	2.020	1.050	350	1.730	-	-	-	180 / 240
350	1.205	700	635	2.625	1.100	400	-	793	766	771	290 / 370

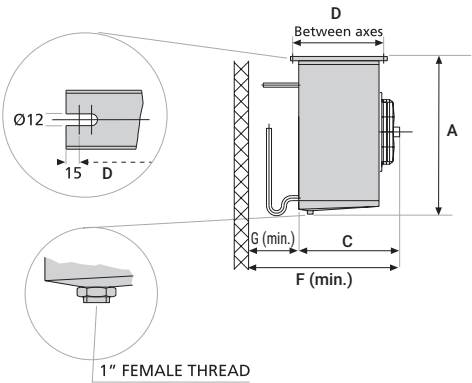


BLOCK VERSION


ASSEMBLY ON PANEL

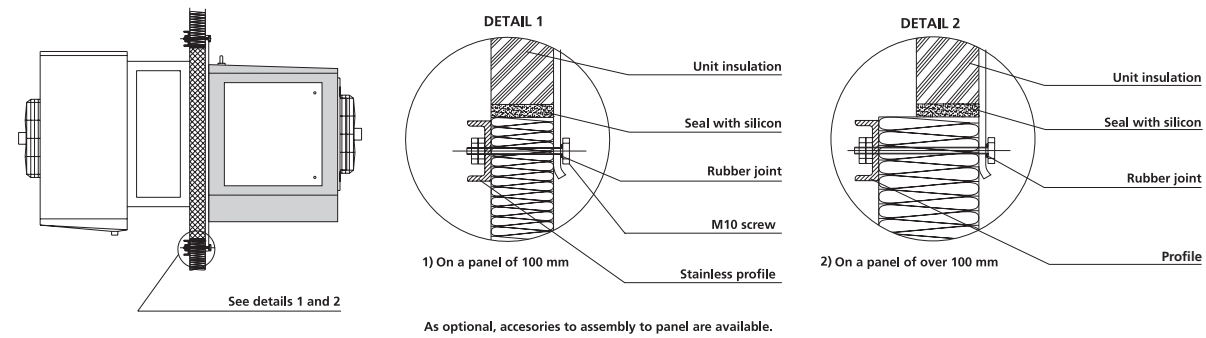

ASSEMBLY ON WALL

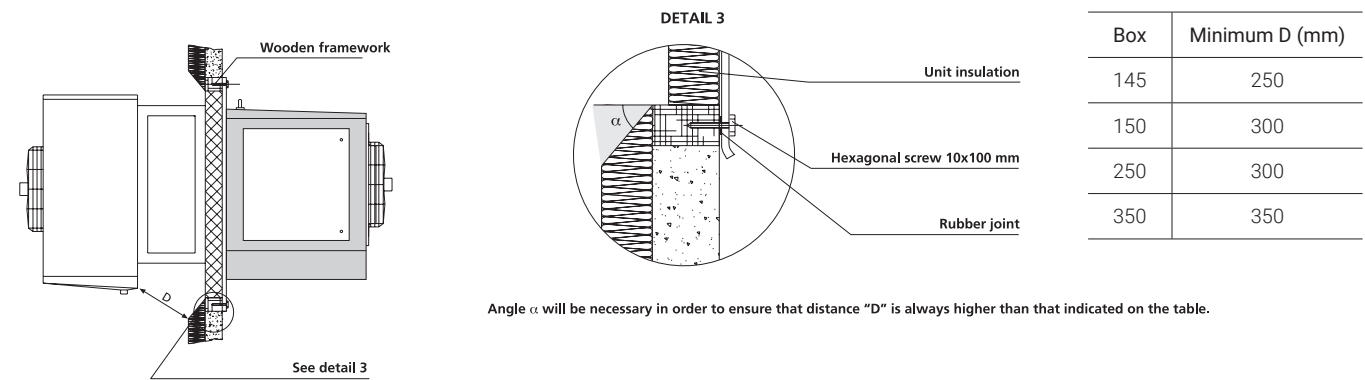

ASSEMBLY ON WALL (SPECIAL)

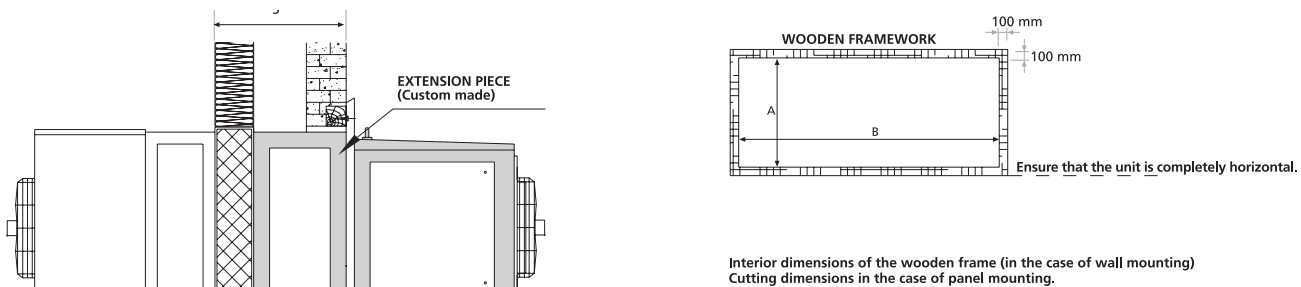

Box	A	B
145	735	1.195
150	855	1.355
250	1.110	2.090
350	1.230	2.725

* For Box 350, the maximum dimension will be 400 mm when loading by track and 300 mm when loading in a container.
For Box 250, increase the maximun dimension by 50 mm.

KIDEPACK PACKAGING (WOODEN CAGE)



Truck transport

BLOCK	LONG	WIDTH	HIGH
Box 145	2.030	1.530	1.010
Box 150	2.260	1.680	1.601
Box 250	2.280	2.335	1.370
Box 350	2.940	2.385	1.490



Maritime transport

BLOCK	LONG	WIDTH	HIGH
Box 145	2.030	1.530	1.010
Box 150	2.260	1.680	1.601
Box 250	2.360	2.260	1.435
Box 350	2.940	2.260	1.530



Truck transport

SPLIT		LONG	WIDTH	HIGH
Box 145		1.630	1.530	1.060
Box 150		1.880	1.680	1.160
Box 250		2.280	2.005	1.350
Box 350		2.940	2.005	1.380
Box 450-s	CONDENSER	3.200	1.600	1.670
	2 EVAP. BOX-250	2.300	2.000	1.240
	2 EVAP. BOX-350	2.860	2.000	1.380



Maritime transport

SPLIT		LONG	WIDTH	HIGH
Box 145		1.630	1.530	1.060
Box 150		1.880	1.680	1.160
Box 250		2.280	2.260	1.370
Box 350		3.000	2.260	1.430
Box 450-s	CONDENSER	3.280	1.680	1.860
	2 EVAP. BOX-250	2.300	2.000	1.295
	2 EVAP. BOX-350	2.860	2.000	1.435

REMARKS

The Split units and Condensing units are sent with legs removed (except Box 450).

For domestic shipment:

- The monoblock units with Box 145 and 150, Split and Condensing units are considered as standard and shipped in cardboard packaging on pallet.
- Dimensions: A x B x C = 2.000 x 1.450 x 1.050. Only in case of Box 150 monoblock with thicker panel and / or with special fans, wooden packaging is used.
- The above dimensions may vary in case of special (special separator, vertical air outlet, etc.).

Optional packaging:

- To ship in container: wooden pack with tablex. Dimensions keep same except those marked with superscript:
(1) C = 1.120 mm, (2) B = 2.260 mm. When the dimension "A" is > 2.300 mm (width of container door) the position is reversed (dimension "A" becomes the "B" and vice versa).
- Export wooden box: Add 40 mm more in "A" and "B" dimensions and 30 mm to dimension "C".

In both cases, (wooden pack with tablex and export wooden box) the machine goes with anti-corrosion protection VC1450ES and the packing has phytosanitary certificate according ISPM-15.





INDUSTRIAL EQUIPMENT

Chillers

p. 138 Glycol chillers

R-290 / A2L / R-449A

p. 140 Cooling batteries

WATER + ETHYLENGLICOL OR PROPYLENGLICOL

kide CHILLER

CHILLERS

GLYCOL CHILLERS

Glycol chillers for high, medium and low temperature applications.

R-449A

R-290 A2L



REFRIGERANTS

R-449A	R-454C	R-290
High and medium temperature	Medium and low temperature	High, medium and low temperature

COOLING CAPACITIES

HIGH	MEDIUM	LOW
6 - 220 kW	5 - 190 kW	2 - 85 kW

GENERAL CHARACTERISTICS

- Available for ethylene glycol or propylene glycol.
- Scroll or semi-hermetic compressor.
- Bodywork with high protection against corrosion and atmospheric agents.
- Inverter Technology.
- EC fan.
- Liquid receiver, filter drier and liquid sight glass.
- Electronic expansion valve
- Plate exchanger.
- High and low pressure transducer and pressure switch.
- Air heat exchanger with copper pipe and copper fin or microchannel.
- Built-in hydraulic circuit including tank and pump.

OPTIONS

- Air heat exchanger with anti-corrosion treatment.
- Total or partial heat reception.
- Monitoring and control system (XWEB). See page 69.


Xweb

WHY R-290?

- **Reliability:** Its low density and thermodynamic properties allow for reduced loads and relatively low working pressures.
- **Efficiency:** The minimum SEPR value required by the current regulations is 2,32 for units with a nominal cooling capacity of less than 300 kW using environmentally-friendly refrigerants such as R-290.
- **Green technology:** Thanks to its exceptionally low GWP of 3, it can be used until 2030 without any restrictions related to the F-Gas Regulation.
- **Highly secure:** It is a non-toxic flammable refrigerant. To ensure the highest level of safety, all units are also fitted with an explosive gas detector.
- **R-290 containment:** In order to make the units more secure and to ensure easier inspection of the installation, R-290 is contained as follows: enclosed housing, gas detector, exhaust fan and transported safety valve(s).



REFRIGERATOR SCHEME

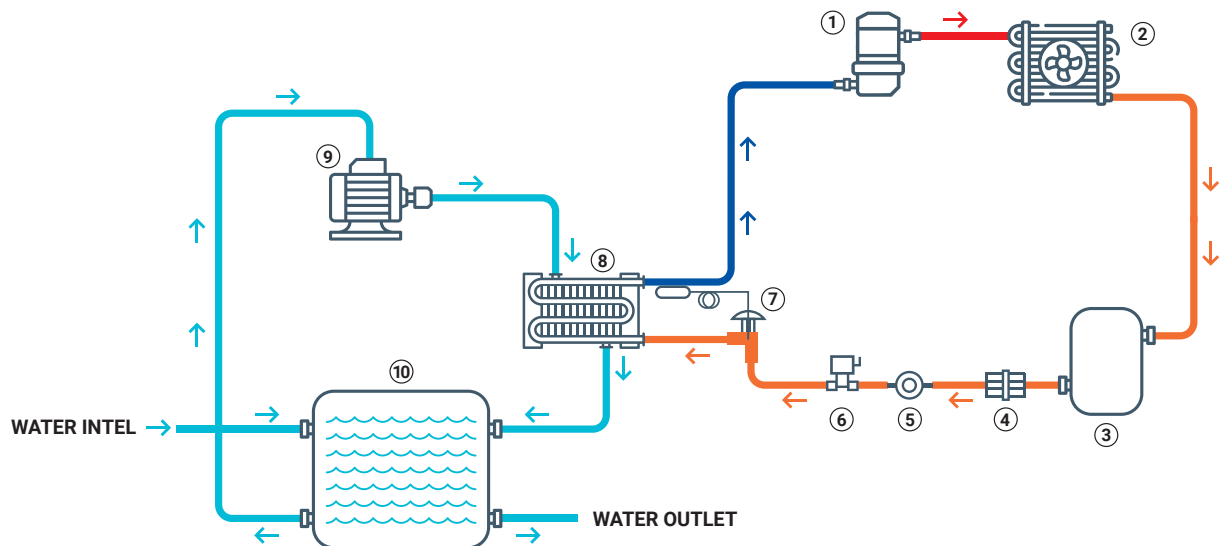

- | | | | | |
|------------------------|-------------------|------------------|-------------------|--------------|
| ① Compressor | ③ Liquid receiver | ⑤ Sight glass | ⑦ Expansion valve | ⑨ Pump |
| ② Air Cooled Condanser | ④ Filter drier | ⑥ Selenoid Valve | ⑧ Evaporator | ⑩ Water tank |

CHILLERS

COOLING BATTERIES

Cooling coils for cold rooms in high, medium and low temperature applications.



	LOW PROFILE	CUBIC	INDUSTRIAL CUBIC	DOUBLE FLOW	INDUSTRIAL DOUBLE FLOW
COOLING CAPACITY	0,7 kW - 4,1 kW	0,8 kW - 16,8 kW	7,9 kW - 70 kW	1,8 kW - 16,5 kW	12 kW - 57,5 kW
FIN PASS	4,2 mm y 7 mm	4,5 mm y 7 mm	4 mm, 7 mm y 10 mm	3,5 mm y 6 mm	3 mm, 4,5 mm y 7 mm

GENERAL CHARACTERISTICS

- Available for water and water with ethylene glycol or propylene glycol.
- Galvanised and painted sheet metal bodywork.
- Copper tubes and aluminium fins.
- Fans with single-phase and three-phase motors with degree of protection IP-44 (IP-54 for industrial cubic) and for temperatures between -40°C and +40°C.
- Air or electric defrost.
- Including three-way valves.
- Control incorporated.

OPTIONS

- Other voltages and 60 Hz.
- High Efficiency Fans.
- Anti-corrosion treatment.
- Stainless steel housing.
- Condensate pump for dual-flow cooling coils.



INDUSTRIAL EQUIPMENT

Drying and curing units

- p.142 Compact mini dryer
[EMS](#) · [A2L](#)
- p. 144 Dried ham, sausage and cheese mini dryers
[KSP - COMPACTO](#) · [A2L](#)
- p. 145 Dried ham, sausage and cheese mini dryers
[KSP - SPLIT](#) · [A2L](#) / [R-449A](#)
- p. 150 Ham drying units
[KSJ](#) · [A2L](#) / [R-449A](#) / [R-513A](#)
- p. 151 Sausage drying units
[KSC](#) · [A2L](#) / [R-449A](#) / [R-513A](#)
- p. 152 Cheese drying units
[KSQ](#) · [A2L](#) / [R-449A](#) / [R-513A](#)

kide MINI DRYER

DRYING AND CURING UNITS

COMPACT MINI DRYER

EMS

Monoblock commercial compact refrigeration Wall equipment for cold storage rooms, which have a small volume, and for use in drying / curing of sausages, hams, and cheeses.

NEW

R-455A
R-454C

A2L



GENERAL CHARACTERISTICS

- Pre-charged with refrigerant.
- Hermetic compressor.
- Expansion by thermostatic valve.
- High and low pressure switches.
- Variable speed drive included.
- Evaporating battery with anti-corrosion treatment included.
- Automatic defrosting by hot gas.
- System for partial evaporation of defrosting water.
- Cable for supply (2,5 m).
- Integrated multifunctional electronic control.
- Temperature and humidity probes.
- Voltage protector.
- Condensation control by pressure switch.
- Ceramic filter dryer
- Isolation panel included.
- Install under roof.
- Watertight electrical panel.
- Air extraction fan.

OPTIONS

- Winter Kit.
- Indoor evaporator and condenser coil with stainless steel tubing
- Humidifier external to the equipment and control.
- Anti-corrosive treatment for the condenser unit furniture.
- Monitoring and control system. See page 69.

Xwzb

Series	Model	Refrigeration capacity	Sausages		Hams		Cheeses		Compressor		R-455A	Max. pot current	Max. load current	Flow		Weight
			W*	m³	kg	m³	kg	m³	kg					evapora.	condens.	
									HP		kg	A	A	m³/h		kg
300	NEW EMS3015C5G	2.950	8/11	500	13/16	1.000	15/20	750	1 1/2	400 /3/50	4,00	7,37	8,1	800	1.500	80
	NEW EMS3020C5G	5.010	13/17	1.000	15/20	2.000	15/25	1.300	2	400 /3/50	4,00	13	14,4	1.200	1.600	80





Power at 12° and 65% humidity.

Equipment prepared to work between 3-28°C and 90-55% humidity.


DIMENSIONS

Unit							
Series	A	B	C	D	E	F	G
300	800	735	1.140	410	615	420	670

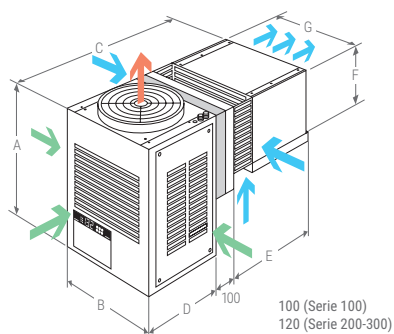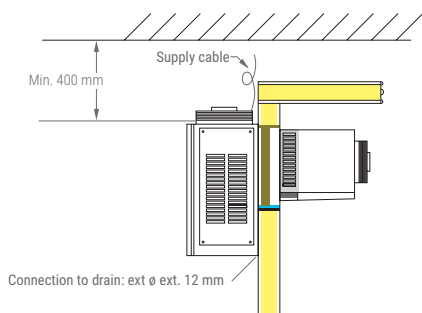

Cut		
Series	H	L
300	415	400

Unit + EMB. / PACK.			
A	B	C	kg
1.136	1.000	1.350	80



The final dimensions of the equipment, packaging and line sizes shall be as indicated in the data sheet.

DRYING AND CURING UNITS

DRIED HAM, SAUSAGE AND CHEESE MINI DRYERS

KSP
Compact
**R-454C
R-455A**


Autonomous models*	Nº Hams	Nº Sausages	Cheese		Refrigeration capacity	Flow	Box	Impulsion Duct	Pot. Max. Abs.	Cond.		Evap.		
			Ripening Room	Ripening and preservation Room						Gas	Liq.	Liq.	Asp	Defrost
	10 kg	Ø 80 mm	m²	m²	W ⁽¹⁾	m³/h	mm	kW ⁽²⁾						
KSP 1,5	180	350	27	20	3.600	2.500	140	600 x 160	3,4	1/2 "	3/8 "	3/8 "	5/8 "	1/2 "
KSP 2	275	650	40	30	4.900	2.500	140	600 x 210	4	1/2 "	3/8 "	3/8 "	7/8 "	1/2 "
KSP 3	420	1.000	61	45	7.200	3.900	143	730 x 240	5,1	1/2 "	1/2 "	1/2 "	7/8 "	1/2 "
KSP 4	540	1.300	80	60	9.300	3.500	143	730 x 260	6,2	5/8 "	1/2 "	1/2 "	7/8 "	5/8 "


* Centralised models to be consulted. (1) With room at +14 °C / 75% R.H. (2) Valid for 400V/III/50 Hz. Take this data for the protection of the equipment.

GENERAL CHARACTERISTICS


- Compact units, easy to install, tested and regulated in our factory.
- Energy saving by using the heat of compression.
- Auxiliary heat through electrical resistors.
- 5,7" touch screen.
- Watertight electrical panel.
- Maneuver for air extraction in case of refrigerant in the environment.

OPTIONS

- Special wooden packaging for container shipment.
- Supply and assembly or supply of galvanised or stainless.
- Humidifier external to the equipment and control.
- Monitoring and control system. See page 69.

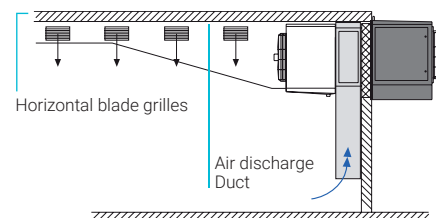

DIMENSIONS

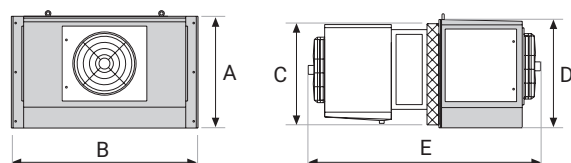

Box	Dimensions (mm)					Fan	Weight
	A	B	C	D	E		kg
150	910	1.520	850	910	1.965	1xØ500	320 / 510



MINI DRYER

DRIED HAM, SAUSAGE AND CHEESE MINI DRYERS

KSP

Split



R-454C
R-455A

R-449A



Autonomous models*	Nº Hams	Nº Sausages	Cheese		Refrigeration capacity	Flow	Box	Impulsion Duct	Pot. Max. Abs.	Cond.		Evap.		
			Ripening Room	Ripening and preservation Room						Gas	Liq.	Liq.	Asp	Defrost
	10 kg	Ø 80 mm	m²	m²	W ⁽¹⁾	m³/h	mm	kW ⁽²⁾						
KSP 1,5-s	180	350	27	20	3.600	2.500	140	600 x 160	3,4	1/2 "	3/8 "	3/8 "	5/8 "	1/2 "
KSP 2-s	275	650	40	30	4.900	2.500	140	600 x 210	4	1/2 "	3/8 "	3/8 "	7/8 "	1/2 "
KSP 3-s	420	1.000	61	45	7.200	3.900	143	730 x 240	5,1	1/2 "	1/2 "	1/2 "	7/8 "	1/2 "
KSP 4-s	540	1.300	80	60	9.300	3.500	143	730 x 260	6,2	5/8 "	1/2 "	1/2 "	7/8 "	5/8 "

(1)

With room at +14 °C / 75% R.H.

(2)

- Split units, easy to install, tested and regulated in our factory.
- Energy saving by using the heat of compression.

- Auxiliary heat through electrical resistors.
- 5,7" touch screen.

- Watertight electrical panel.
- Maneuver for air extraction in case of refrigerant in the environment.

- Other voltages and 60 Hz. Applies to R-449A
- Special wooden packaging for container shipment.
- Evaporator coil with stainless steel pipe and pre-lacquered aluminium fins.
- Supply and assembly or supply of galvanised or stainless.
- Humidifier external to the equipment and control.
- Monitoring and control system.

See page 69.

Technical drawing of the 1000W 230V/50Hz electric heater, showing front, side, and detail views with dimensions in millimeters (mm).

Front View Dimensions:


- K:** Total width of the heater.
- E:** Total height of the heater.

Side View Dimensions:

- D:** Distance between the mounting axes.
- A:** Total height of the heater body.
- C:** Distance from the mounting axis to the center of the heater body.
- F (min.):** Minimum distance from the mounting axis to the bottom of the heater body.
- G (min.):** Minimum distance from the mounting axis to the top of the heater body.

Detail Views:

- Top View:** Shows a circular mounting hole with a diameter of $\varnothing 12$ and a distance of 15 mm from the center to the edge of the mounting flange.
- Bottom View:** Shows the 1" female thread connection for the mounting bracket.



Box	Dimensions (mm)										Weight
	A	C	D	E	F	G	K	K1	K2	K3	kg
150	860	700	635	1.330	1.050	350	1.150	-	-	-	90 / 120

Box	Dimensions (mm)					Weight
	A	B	C	D	E	kg
150	1.360	910	865	700	1.320	290 / 460

DRYING AND CURING UNITS

This catalogue deals with units which have been designed to imitate the natural ham (and other curing sausages) drying, curing and ripening processes.



SYSTEM DESCRIPTION

The product is stored in an insulated room, where temperature and relative humidity are constantly controlled. This allows accurate control of the room climate and therefore of the requested process.

To obtain a good result, the right air distribution throughout the room and through the product is required.

With our air distribution system, the room is fitted with two ducts that are installed on the side-walls of the room. These ducts drive the air vertically and at a very high speed. The air touches the floor and also two half-rounds, installed inside the room, that drive the air horizontally.

Then, there is an oscillation effect and the air flows, which come from both ducts, meet each other and go up towards the suction ducts. The result is perfect air distribution through the product.

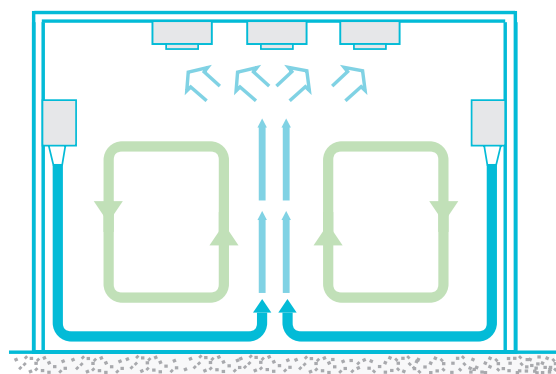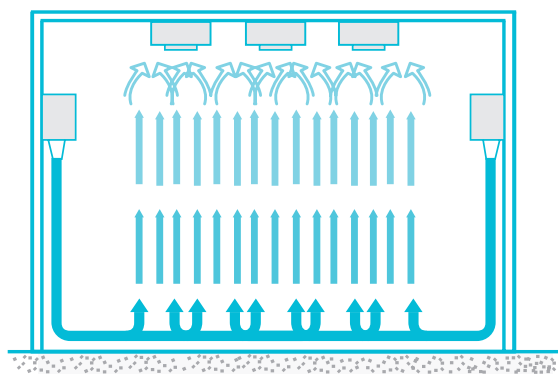



Our units can be used for complete cycle processes (the whole process in the same room) or for part-cycle processes (for concrete steps of each process).

Regarding hams, our units have been designed to do the different steps of post-salted, rest, drying, ripening, curing, storage, and so on...

Our units allow to do a sausage cold cure process or to follow the usual steps of the curing process and afterward drying process.

Owing to the high technical development of our units, they adapt themselves to any state or local manufacturing habits.

We recommend that you contact our Projects Department to obtain the best solution for each project and process.



GENERAL CHARACTERISTICS

- Free-standing drying units for R-449A, R-134A, R-513A, R-454C and R-455A.
- Personalised study for each project.
- Stainless steel cabinet.
- Floating condensation through drying temperature.
- Scroll or semi-hermetic compressors from top brands.
- Standard batteries in copper tubes and aluminium fins (option of stainless steel tubes and pre-lacquered aluminum fins).
- Auxiliary heat through electrical resistors, optionally for hot water or steam.
- EC radial fans with flow regulation from the control itself.
- Electronic expansion valve.
- Insulated cabinet and outer drain tray when the cabinet is located outside the chamber.
- Centralised glycol or freon drying units (check with technical office).
- Air distribution duct design adapted to each chamber.
- Sluices, discharge cones and suction nozzles supplied.
- Complete electrical panel built into the cabinet. Has all the necessary automatisms, protection and safety devices for the proper operation of the equipment.
- Manufactured under strict quality controls that are respectful of the environment. ISO 9001 and ISO 14001.
- Comply with electrical, refrigeration and pressure equipment safety regulations (European PED 2014/68/EU certification).
- 5,7" touch screen, optionally 10".



CONTROL SYSTEM

Our KIDEMATIC controllers are fitted with the following benefits:

- They allow selecting the control variables.
- They display graphics in 2h, 8h and 24h scales.
- They are fitted with saving energy planning systems.
- They are fitted with drying system using the outside air (when outside weather conditions are appropriate)
- They are fitted with air renew system.
- They admit remote-maintenance via online.
- They allow the possibility of programs with several phases according to the work process.
- They display the product water loss.
- Easy connection between controller display and electric panel.

Allows to reduce the amount of electrical and mechanical components from the power-and control part.

They can be connected to our Drying unit control software program via RS-485, and there is also the possibility of sending remote warnings messages via SMS or e-mail.



kide DRYER

DRYING AND CURING UNITS

**HAM
DRYING UNITS**

KSJ



**AUTONOMOUS
DRYERS**

R-454C R-449A
R-455A R-513A



**CENTRALISED
DRYERS**

**WATER + ETHYLENGLICOL OR
PROPYLENGLICOL**

Autonomous models*	Refrigeration capacity	Compressor	Flow	Num. pieces	Pot. Max Abs.
	W ⁽⁴⁾	HP	m³/h	10kg ⁽¹⁾	kW ⁽³⁾
KSJ-A-1/3	8.100	3 H	2.200	400	6,7
KSJ-A-1,5/4	11.900	4 H	2.700	600	8
KSJ-A-2/5	15.100	5 H	3.000	800	9,5
KSJ-A-3/6	19.100	6 H	3.900	1.200	13,7
KSJ-A-3/8	22.700	8 H	4.900	1.600	16,3
KSJ-A-4/10	28.900	10 H	6.200	2.000	19,5
KSJ-A-5/12	36.700	13 H	7.500	2.500	25,7
KSJ-A-6/15	39.200	15 H	9.100	3.000	24,2
KSJ-A-8/20	45.800	20 H	11.600	4.000	29,5
KSJ-A-10/25	58.400	25 H	13.600	5.000	39,4
KSJ-A-12/30	67.000	30 H	16.600	6.000	50,1
KSJ-A-15/35	87.600	35 H	19.600	7.000	59,6
KSJ-A-15/40	100.600	40 H	22.400	8.000	66,8
KSJ-A-20/50	120.200	50 H	27.200	10.000	85,9
KSJ-A-25/60	134.000	60 H	33.100	12.000	106,4
KSJ-A-30/70	168.300	2 x 35 H	39.800	14.000	123,8
KSJ-A-30/80	201.000	2 x 45 H	46.600	16.000	141,5
KSJ-A-40/100	24.000	2 x 50 H	54.700	20.000	164,7

* Centralised models to be consulted.

(1) Estimated capacities for complete cycle processes. Please contact our Project Department.

(3) Valid for 400V/III/50 Hz Power Supply. Take this data into consideration for the unit's protection.

(4) With room at +14 °C / 75% R.H.

OPTIONS see page 154

kide DRYER

DRYING AND CURING UNITS

**SAUSAGE
DRYING UNITS**

KSC



**AUTONOMOUS
DRYERS**

R-454C R-449A
R-455A R-513A



**CENTRALISED
DRYERS**

**WATER + ETHYLENGLICOL OR
PROPILENGLICOL**

Autonomous models*	Refrigeration capacity	Compressor	Flow	kg	kg	Pot. Max. Abs
	W ⁽⁴⁾	HP	m³/h	Ø 80 mm ⁽²⁾	Ø 36 mm ⁽²⁾	kW ⁽³⁾
KSC-A-1/3	8.100	3 H	2.200	1.000	700	8,2
KSC-A-1,5/4	11.900	4 H	2.700	1.500	1.000	11
KSC-A-2/5	15.100	5 H	3.000	2.000	1.350	12,5
KSC-A-3/6	19.100	6 H	3.900	2.500	1.700	16,7
KSC-A-3/8	22.700	8 H	4.900	3.500	2.400	20,8
KSC-A-4/10	28.900	10 H	6.200	4.000	2.700	24
KSC-A-5/12	36.700	13 H	7.500	5.000	3.400	34,7
KSC-A-6/15	39.200	15 H	9.100	6.000	4.000	33,2
KSC-A-8/20	45.800	20 H	11.600	7.000	4.700	34
KSC10/25	58.400	25 H	13.600	8.000	5.400	42,4
KSC-A-12/30	67.000	30 H	16.600	10.000	6.700	53,1
KSC-A-15/35	87.600	35 H	19.600	12.000	8.000	62,6
KSC-A-15/40	100.600	40 H	22.400	13.000	8.700	71,3
KSC-A-20/50	120.200	50 H	27.200	16.000	10.700	84,3
KSC-A-25/60	134.000	60 H	33.100	20.000	13.400	103,4
KSC-A-30/70	168.300	2 x 35 H	39.800	24.000	16.000	114,8
KSC-A-30/80	201.000	2 x 45 H	46.600	27.000	18.000	141,5
KSC-A-40/100	24.000	2 x 50 H	54.700	33.000	22.000	164,7

★ Centralised models to be consulted.

(2) Estimated capacities for stoving + drying processes. Please contact our Project Dpt.

(3) Valid for 400V/III/50 Hz Power Supply. Take this data into consideration for the unit's protection.

(4) With room at +14 °C / 75% R.H.

OPTIONS see page 154

kide DRYER

DRYING AND CURING UNITS

**CHEESE
DRYING UNITS**

KSQ



**AUTONOMOUS
DRYERS**

R-454C R-449A
R-455A R-513A



**CENTRALISED
DRYERS**

**WATER + ETHYLENGLICOL OR
PROPYLENGLICOL**

Autonomous models*	Cheeses	Refrigeration capacity	Compressor	Flow	Pot. Max. Abs
	kg ⁽⁵⁾	W ⁽⁴⁾	HP	m ³ /h ⁽⁶⁾	kW ⁽³⁾
KSQ-A-3	9.000	8.100	3H	2.400	5,2
KSQ-A-4	12.000	11.900	4H	3.000	6,5
KSQ-A-5	15.000	15.100	5H	3.200	8
KSQ-A-6	22.000	19.100	6H	44.000	11,4
KSQ-A-8	30.000	22.700	8 H	5.300	12,6
KSQ-A-10	45.000	28.900	10H	7.000	15,8
KSQ-A-15	60.000	39.200	15H	9.900	19,7
KSQ-A-20	85.000	45.800	20H	12.800	23,5
KSQ-A-25	110.000	58.400	25H	15.000	32,3
KSQ-A-30	135.000	67.000	30H	18.300	37
KSQ-A-35	160.000	87.600	35H	21.700	48,4
KSQ-A-40	200.000	100.600	40H	24.400	57,6
KSQ-A-50	250.000	120.200	50H	29.000	65,6

* Centralised models to be consulted.

(3) Valid for 400V/III/50 Hz Power Supply. Take this data into consideration for the unit's protection.

(4) With room at +14 °C / 75% R.H.

(5) "kg" for hard paste cheese and ripening at 14 °C (slow dry). Load density: 110/120 kg/m³. Consult us, for the selection of the most suitable unit model and air distribution system.

(6) Drier unit fitted with one adjustable bypass gate, that allows to increase the recirculated air flow.

OPTIONS see page 154

DRYING AND CURING UNITS


KSJ / KSC / KSQ

DIMENSIONS

DIMENSIONS				
KSJ/KSC	KSQ	A (mm)	B (mm)	C (mm)
01-03	3	1.060	650	1.953
1,5-4	4	1.260	650	1.953
02-05	5	1.350	675	1.953
03-06	6	1.350	675	1.953
03-08	8	1.400	800	2.075
04-10	10	1.575	800	2.113
05-12		1.575	900	2.113
06-15	15	1.800	900	2.230
08-20	20	2.200	900	2.245
10-25	25	2.200	1.040	2.375
12-30	30	2.600	1.170	2.420
15-35	35	3.000	1.170	2.340
15-40	40	3.000	1.170	2.380
20-50	50	3.300	1.350	2.750
25-60		3.600	1.450	2.677
30-70		3.900	1.570	2.820
30-80		4.150	1.600	2.890
40-100		4.450	1.730	2.925



Packing dimensions on request.

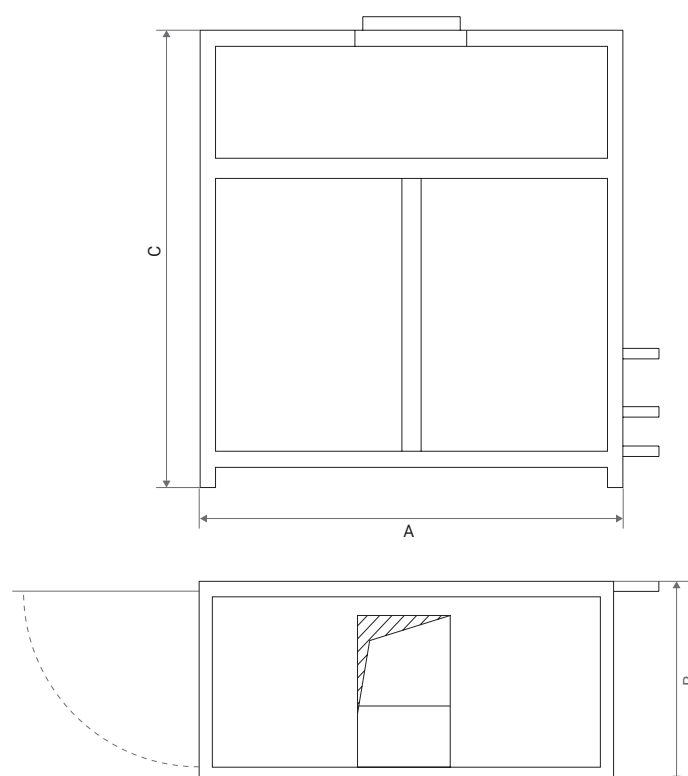

AIR DUCTS AND OPTIONS

KIDE studies and designs the best solution for the air distribution ducts for each drying unit. The ducts installation drawings are also available.



The discharge cones, adjustable return nozzles, and motorized gates are also supplied together with the ducts.

The sausage drying units are also fitted with air change motorized gates.

KIDE has developed complementary technological solutions, depending on the room type and the drying unit's process or application, such as:

- Air flow reverse
- Double or triple air injection
- Outdoor air use
- Humidifier

Accessories: KIDE supplies all types of the drying unit's original spare parts.

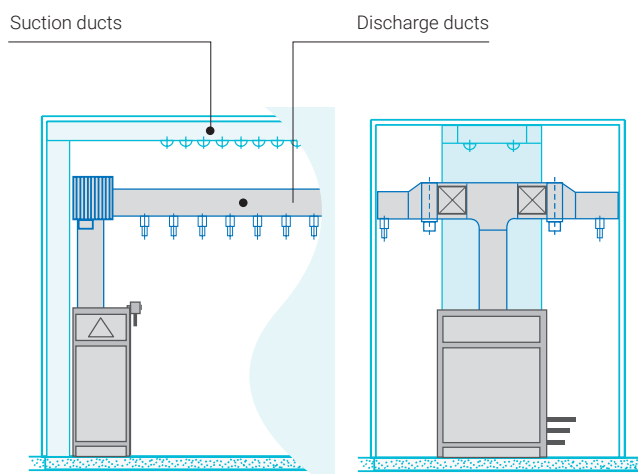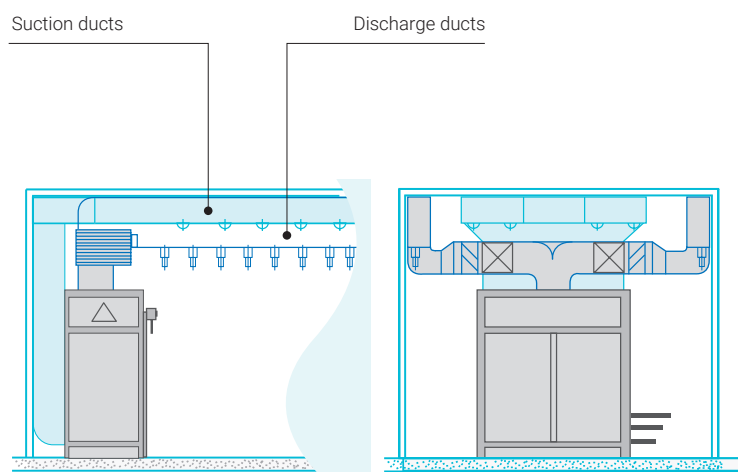



ADVANTAGES

- Easy-to-install units.
- Curing process and outdoor climate are totally independent.
- Our system avoids product loss.
- Product homogeneity.
- Sanitary control.
- Full factory tested and commissioned.
- Use of compression heat to keep the same room temperature during the drying process.
- Fast and effective defrosting by hot gas.
- Range of temperatures between 0 °C (refrigeration and drying) and 30 °C (heating).
- Advanced control system KIDEMATIC.


FOR A2L:

- Watertight electrical panel.
- Maneuver for air extraction in case of refrigerant in the environment.

OPTIONS

- Supply and assembly or supply of galvanised, stainless or textile ducts.
- Evaporator battery and internal condenser with stainless steel pipe (primarily for sausages and cheeses).
- External condenser with EC fans, silent fans, centrifugal fans and anti-corrosion treatment for saline environments.
- Partial or total heat recovery for hot water use.
- Hot water or steam battery for auxiliary heat supply.
- Humidification system.
- Tandem drying unit, available for 2 chambers.
- Equipment at 60 Hz.
- Special wooden packaging for container shipment.
- 10" control screen.
- Oil separator.
- Suction separator.
- Insulated cabinet.
- Monitoring and control system. See page 69.



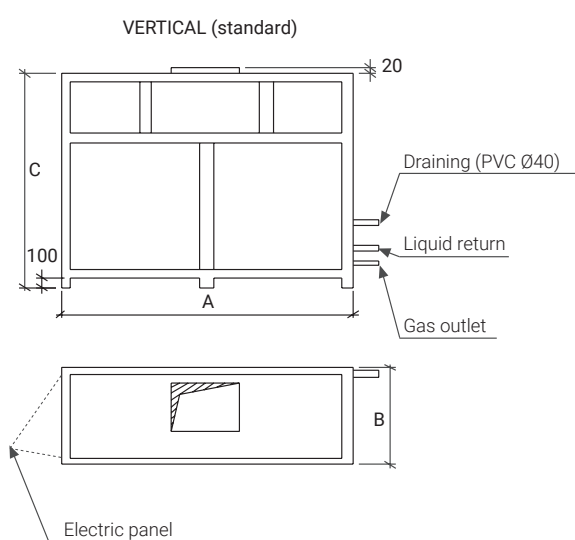



INDUSTRIAL EQUIPMENT

Thawing units

p. 158 Thawing units
[KD](#)



THAWING UNITS

KD



	N° Hams	Refrigeration capacity	Compressor	Heating Capacity	Max. Abs. Power	Gas tube	Liq. Tube	Weight
Models	10 kg	W ⁽¹⁾	HP	kW	kW ⁽²⁾			kg
KD 50	500	5.100	3H	15	16,4	7/8"	5/8"	290
KD 75	750	7.200	4H	22,5	25	7/8"	5/8"	360
KD 100	1.000	9.500	5H	30	32,5	7/8"	5/8"	420
KD 150	1.500	14.000	8H	45	46,3	11/8"	5/8"	525
KD 200	2.000	18.300	10H	60	60,3	11/8"	7/8"	630
KD 250	2.500	23.500	13H	75	80,8	11/8"	7/8"	840
KD 300	3.000	25.800	15H	90	97,8	11/8"	7/8"	990
KD 350	3.500	29.800	20SH	108	117,5	11/8"	7/8"	1.130
KD 400	4.000	33.500	22SH	120	131,3	11/8"	7/8"	1.260
KD 500	5.000	37.000	25SH	144	156	13/8"	11/8"	1.550

(1) With room at 0 °C and outdoor temp +32 °C.

(2) Valid for 400V/III/50 Hz. Take this data for the protection of the equipment.

GENERAL CHARACTERISTICS

- 3 process control probes: environment, inside product and product surface
- Autonomous or centralized equipment, easy to install, tested and regulated in our factory.
- Electronic control through a state-of-the-art automaton with its own programming.
- Integral models fitted with:
- Compressor for temperature maintenance.
- Additional heat by:
- Hot/glycol water.
- Electrical heaters.
- Steam.
- Minimum time to perform the defrost process 16h
- All thawing units include a humidifier.
- Magneto-thermal protection.


OPTIONS

- Evaporator coil with stainless steel pipe and pre-lacquered aluminium fins.
- Insulated cabinet and drain pan.
- Supply or supply and assembly of galvanised or stainless steel ducts.
- Packaging for export.
- XWEB monitoring and control system. See page 69.



DIMENSIONS

Model	A	B	C	kg
50	1.200	600	1.648	290
75	1.270	675	1.712	360
100	1.270	800	1.850	420
150	1.575	900	2.000	525
200	1.800	900	2.030	630
250	2.200	900	2.080	840
300	2.200	1.040	2.268	990
350	2.600	1.050	2.340	1.130
400	3.000	1.050	2.340	1.260
500	3.000	1.170	2.340	1.550

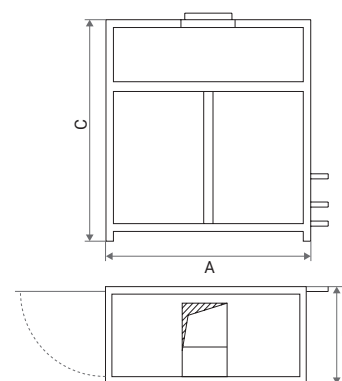

Packaging dimensions. **Consultar**



Annex

- p. 160 Electronic control
- p. 165 Heat recovery
- p. 167 Split units with independent electrical panel
- p. 168 Calculation basis.
Commercial equipment
- p. 169 Calculation basis.
Industrial equipment

Annex

ELECTRONIC CONTROL

Features / Controller	K1501	KP180	iPro	XH260L	XW60K_2Di	XW60LH
Chamber temperature control	•	•	•	•	•	•
Temperature control evap	•	•	•	•	•	•
Chamber RH control	•	•	•	•		
Defrost by time or temperature	•	•	•	•	•	•
Stop by gas collection (pump down)*	•	•	•		•	
Saving mode (2nd Setpoint)	•	•				
Hourly programming	•	•				
Condensation control (digital)			•	•	•	•
Condensation control (EC fans)	•	•				
Electronic expansion	•	•				
Door opening contact	•	•			•	•
Temperature recording (graphs and history)	•	•				
Humidity recording (graphs and history)	•	•				
User levels (operator, maintenance)	•	•	•	•	•	•
Camera light	•				•	•
Saida Relay Management External alarm	•	•			•	•
Alarm log (historical)	•	•	•	•		
Control of the cooker	•	•	•	•		
PID control algorithms (T° and RH)	•	•				
Condensation ventilation control (5th line)	•	•	•	•	•	•
Use of outside air	•					
Control of freezing and defrosting of products by means of spike probes.	•					
2-chamber drying control (Twin)	•					
Drying programmer by stages "recipes"	•					
Touch screen	•	•				
Multilanguage	•	•	•			
R845/TTL communication	•	•	•	•	•	•
Ethernet communication	•	•	•			
Modbus protocol	•	•	•	•	•	•
Pressure reading on screen	•	•	•			

* For gas collection (pump down)*, only applies to quiet + MAXIBLOCK / split models.


XW60LH CONTROLLER

- **Monoblock series (EMB, EMC).**
- The temperature control of the chamber is managed by a microprocessor and digital control knob, depending on the setpoint temperature established by the user.
- It has the following functions:
 - Automatic defrost control.
 - Evaporator fan control via suction probe.
 - Digital condensation control.
 - Pressure alarm control.
 - Camera lighting management via control unit.
 - TTL communication (TT-RS485 converter available), modbus protocol.



XW60K CONTROLLER

- **Split, ceiling, box control, quiet, propane, MAXIBLOCK/SPLIT (ESC, ESF, ESS, ESH, ESW, EMR, EMF, UMB, USC) series.**
- The temperature control of the chamber is managed by a microprocessor and digital control knob, depending on the setpoint temperature established by the user.
- It has the following functions:
 - Automatic defrost control.
 - Evaporator fan control via suction probe.
 - Digital condensation control.
 - Pressure alarm control.
 - Camera lighting management via control unit.
 - TTL communication (TT-RS485 converter available), modbus protocol.

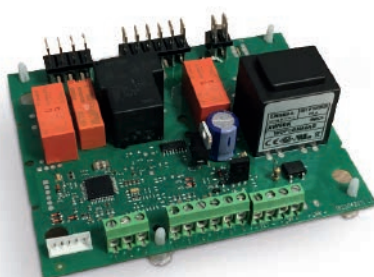

KIDEPACK KP180 CONTROLLER

Kidepack (KP) series.

- This latest generation controller, developed by KIDE, is an equipment based on a Schneider M172 PLC, programmed to control cold rooms and freezing tunnels, with a 5,7" Schneider touch screen.
- Communication between the PLC and the touch screen is via RS485 Modbus.
- Each controller control allows the management of up to 4 independent chambers.
- 5 languages available: Spanish, French, English, Portuguese and Chinese.
- Management of specific alarms according to alarm type: From the main screen you can see if there are active alarms. The screen emits an audible alert when there is an alarm. It also has a menu where a history of alarms and warnings is recorded.
- Room temperature graphs are available. History of up to 1 year, by means of a calendar.
- The KIDEPACK-KP180 incorporates:
 - 5,7" HMISTU touch screen.
 - IP65 remote control panel protection.
 - Programmable Controller M172.
 - Number of configurable inputs/outputs (optional expansion modules).
 - Colour graphs of the chamber temperature.
 - Access key according to user levels (operator, technician and manufacturer).
 - Programming peak/off-peak hours (energy saving).
- Optionally, the equipment can communicate with external supervision systems or extractions through the Modbus-Rtu (RS-485 port) communications protocol.



XH260L CONTROLLER


- **Commercial Mini Dryer (EMS) series.**
- By means of this microprocessor we control the temperature and humidity in the mini dryers, which has a digital control knob, with the following operating modes:
- The regulation of the operation of the equipment is carried out (based on the temperature and humidity values) by means of a thermostatic control of the temperature and humidity of the chamber depending on the setpoint humidity established by the user.
- Control knob:
 - It consists of a 3-digit digital display, a 6-button keypad and indicator lights indicating operating modes, faults and alarms.
- It has the following functions:
 - Automatic defrost control.
 - Chamber air flow control (inverter).
 - Digital condensation control.
 - Pressure alarm control.
 - TTL communication (TT-RS485 converter available), modbus protocol.



KIDEMATIC 1501 CONTROLLER

- **Dryer (KS), Defrost (KD) Series, dried ham, sausage and cheese Mini Dryers (KSP).**
- This latest generation controller, developed by KIDE applying the improvements and knowledge in drying processes acquired over time, is a unit based on a Schneider M241 PLC, programmed to control drying, ripening and defrosting chambers, with a 5,7" touch screen from Schneider.
- The KIDEMATIC-1501 incorporates:
 - 5,7" HMISTU touch screen.
 - IP65 remote control panel protection.
 - Programmable Controller M241.
 - Number of configurable inputs / outputs.
 - Colour graphs of chamber temperature and humidity.
 - Access code according to user levels.
 - Programming peak/off-peak hours (energy saving) .
 - Management of specific alarms according to alarm type: From the main screen you can see if there are active alarms. The screen emits an audible alert when there is an alarm. It also has a menu where a history of alarms and warnings is recorded.
 - It has graphs of the room temperature and humidity. History of up to 1 year, by means of a calendar.
 - Optionally, the equipment can communicate with external supervision systems or extractions through the Modbus TCP (Ethernet port) or Modbus-Rtu (RS-485 port) communications protocol.







Advantages of heat recovery are:



- Condensation heat is used for generating hot water (SHW or process hot water). Hot water is generated while supplying the needs for generating cold.
- Unit performs better, resulting in lower power consumption.
- Careful about the environment (total rejection of heat from the condenser to the environment).

PARTIAL HEAT RECOVERY

A heavy recovery system is installed between the compressor and the air-cooled condenser. Main features:

- Captures heat from the superheated refrigerant, using the discharge temperature of the compressor.
- A small amount of heat is available as overheating of the refrigerant is eliminated (depending on the temperature required for hot water, it is possible to recover up to 20% of the total heat from condensation).
- Can reach hot water temperatures of up to 55 °C.

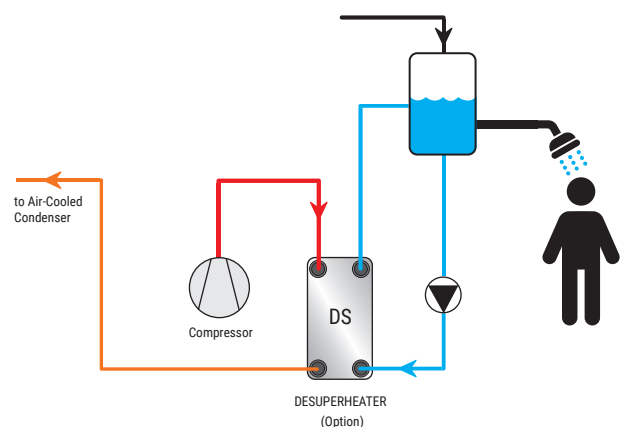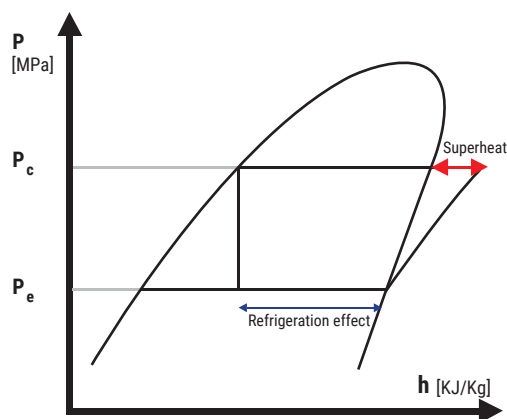

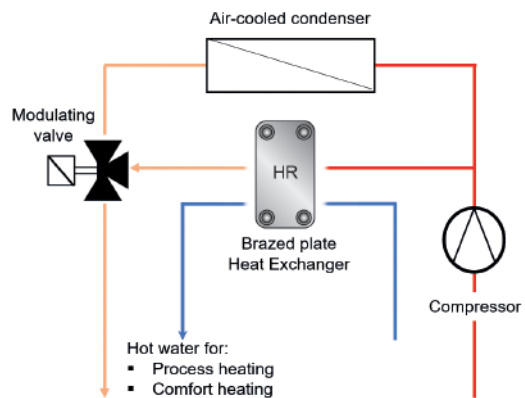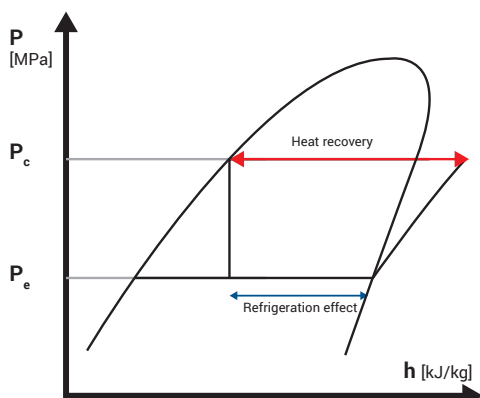

TOTAL HEAT RECOVERY

An additional heavy recovery system is installed so that the design of the refrigerant circuit allows it to recover the total heat available from the condenser. Main features:

- Captures heat from the refrigerant condensation process.
- More heat is available compared to partial heat recovery: the entire condensation process can be used to produce hot water.
- Can reach hot water temperatures of up to 55 °C.



Annex

SPLIT UNIT WITH INDEPENDENT ELECTRICAL PANEL

* Available for commercial split units only.



Split units with independent electrical panel for independent evaporator.



Suitable for facilities in which there is a considerable distance between the condensing unit and the evaporator.



Reduction in cost of the electrical facility.

Annex

CALCULATION BASIS. COMMERCIAL EQUIPMENT



Standard: 100 mm insulation for cooling and 120 mm for frozen items (floor included); load density 250 kg/m³; movement of goods 10%; ambient temperature 32 °C; maximum entry temperature of goods 25 °C for cooling and -15 °C for frozen items; specific heat of goods 3,2 kJ/kg-K for cooling and 1,8 kJ/kg-K for frozen items; compressor functioning 18 h per day.



Recommended volume for cases where starting data are not available for calculations or where conditions are more extreme than standard e.g. low thermal insulation capacity of cold room, low airtightness of cold room, not insulated floor, aggressive external conditions, destination and use of the cold room in extreme conditions, etc.

Limit Outdoor working temperature 43 °C.

If higher PLEASE CONSULT US.

In the case of fruits and vegetables, multiply by 1,50 or consult us.

CALCULATION BASES FOR HIGH TEMPERATURE EQUIPMENT

- Insulation 60 mm
- Uninsulated floor (concrete 100 mm)
- Chamber temperature 12 °C-15 °C
- Product temperature 16 °C
- Load density 250 kg/m³;
- Goods movement 10%;
- Ambient temperature 32 °C;
- Operating hours 18 h
- Unfavorable case from T. 40 °C onwards

Annex

CALCULATION BASIS. INDUSTRIAL EQUIPMENT

		KPA	KPM	KPMH	KPB	KPC	KPTC	KPDE	KPMB	KPBM
Outdoor temperature	°C	32	32	32	32	32	32	32	32	32
Cold-room temperature	°C	15	0	0	-20	-30	-	-	0/-20	-20/0
Load density	kg/m ³	250	250	250	250	250	-	-	250	250
Operating hours	hrs/day	18	18	18	18	18			18	18
Insulation	mm polyisocyanurate 40 kg/m ³	100	100	100	120	150	150	150	120	120
Heat transfer coefficient	W/m ² K	0,35	0,35	0,35	0,29	0,23	0,23	0,23	0,29	0,29
Product input temp.	°C	25	25	25	-12	-20	-	-	25 / -12	-12 / 25
Load per day	% of the total	10%	10%	10%	7%	7%	-	-	10% / 7%	7% / 10%
Specific heat	kJ/kg°K	3,2	3,2	3,8	1,8	1,8	-	-	3,2 / 1,8	1,8 / 3,2

- The Maximum recommended distance for hot gas defrost in Split units is 15 m.
- The given pipe diameters are for connexions in Split units and are suitable for a distance of 15 m between condensing and evaporating modules.
- In any case, pipes with proper thickness should always be used to comply with PED 2014/68/UE according to the pressure of the unit.
- Compressor:
 - H = Hermetic,
 - SH = Semi-hermetic,
 - DE = Two stage.
- Limit Outdoor working temperature 43 °C. If higher PLEASE CONSULT US.
- In the case of fruits and vegetables, multiply by 0,65 or consult us.

EXCLUSIONS

- Any material or work required and not specified in this offer.
- Licences, visas and permits, safety study and safety coordinator.
- Cold room project.
- All transfers at a level other than road level or over distances of more than 20 m. that cannot be carried out by forklift will be subject to a surcharge that will be invoiced.
- Reception and location of equipment at the established sites.
- Cranes and necessary loading and unloading equipment.
- Removal of surplus material (remaining panels, etc.).
- Masonry, carpentry or plumbing works, such as levelling, pipes, drains, power supply, water drainage, support points, etc.
- Sealing between civil floor and panel.
- Sealing of joints between panels with silicone.
- Finishing of the existing gaps between the cold room and the masonry walls.
- Panel cuts for other trades.
- General cold room assembly (pipes, valves and fittings for interconnection between elements) and replenishment of refrigerant and oil, as well as ducts and their assembly.
- Lighting and light fittings.
- Half-round profiles, stainless steel or civil works (in the case of dryers), to favour the correct distribution of air between the product.
- Electrical connections. The customer shall provide adequate electrical connections for the tools necessary to assemble the cold room and equipment, as well as for their operation. 220 V 20 kW electrical connections.
- Resistor/valve/alarm connection
- Protected low-voltage connection to the equipment's electrical panel.
- Wiring between equipment, probes and control panels, as well as computer if necessary.
- Ethernet (level 1) cabling between the PLCs of the controllers and the supervisory PC.
- Appropriate means of handling, lifting, clearing of debris. These shall be provided by the customer.
- Any additional movement for reasons beyond KIDE's control (unprepared assembly area, installation of sanitary fittings, adjustment of doors after floor preparation, etc.) will be invoiced separately.
- The valuation has been carried out according to drawings or measurements provided by the customer/engineering. Any work not specified in the plans, such as lining columns, having to make cuts as a result of erroneous measurements, ramps, access covers, etc., will be invoiced separately.

PRODUCT LIABILITY

- KIDE shall be liable for any harm to persons or property resulting from defects or errors in the products and/or services delivered by KIDE (with the exceptions set out in these General Terms and Conditions). However, KIDE does not, under any circumstances, assume liability for loss of operation, loss of time, loss of earnings or similar indirect loss of the Buyer.
- In relation to the above point, under no circumstances shall KIDE assume liability for operational losses, loss of profit or any other type of indirect damage.

GENERAL CONDITIONS OF SALE

- The order will be processed if and only if it is accepted by the insurance company or credit institution and provided that there is no outstanding balance with KIDE.
- In the case of orders that include transport, if there are difficulties for delivery by normal lorry in areas that are difficult to access, the customer must indicate this when placing the order. This special transport will be invoiced separately and a 6% surcharge will be applied to the value of the goods.
- The delivery period shall commence after written confirmation of the order, acceptance of the order and formalisation of the payment terms (receipt of the advance payment, notification of the letter of credit, etc.).
- The deadline is considered as material packed and ready for delivery.
- In the event of public holidays (Easter, Christmas, summer), the period for dispatch may be increased accordingly, and confirmation is therefore recommended.
- In the case of payment by letter of credit, this shall be irrevocable and confirmed, and opened in a first class bank (BBVA, SABADELL, SANTANDER, LABORAL KUTXA, BANKINTER, BANKIA).
- The duration of the credit shall be at least 1 month longer than the agreed delivery period. KIDE is under no obligation to commence the manufacture of the goods or to provide the services until the letter of credit has been confirmed and accepted by KIDE.
- KIDE's registered office and its premises shall be the place of performance of the contractual obligations. The obligations shall be deemed to have been fulfilled by KIDE when it notifies the Customer that the goods have been made available at the facilities of the manufacturer's registered office. Ownership of the manufactured goods shall only be transferred when payment has been made in full, however, the risk of loss and/or damage shall be transferred as soon as the goods have been made available at the place of fulfilment of the contractual obligations.
- In the event that within 15 days of KIDE making the goods and/or services available to the Customer, the latter does not indicate a place for delivery of the goods and/or services or does not take delivery of the material and/or services, KIDE reserves the right to terminate the contract early, to destroy the material at the Customer's expense and to claim from said Customer the costs of scrapping and/or temporary storage, losses due to resale to third parties and any other damages arising from such situation, and shall be entitled to deduct these damages from the amount paid in advance by the Customer.
- Alternatively, KIDE reserves the right to store the goods manufactured in its facilities or in the facilities of a third party, and may claim a financial penalty of 15 euros per m2/month for such storage, without prejudice to KIDE's right to claim for damages and losses incurred as a result of the situation. The aforementioned storage period may be extended for a maximum of 45 days. Once this period has elapsed, KIDE may terminate the Contract without prejudice to its right to claim all damages and losses that it may have incurred.
- If payment is not made on the due date, KIDE will add the financial cost corresponding to the delay in payment. Any delay in payment, for whatever reason, shall automatically increase the price by the interest set in accordance with Law 3/2004 of 29 December on the prevention of late payment in commercial transactions. If it is necessary to resort to legal proceedings for collection, the amount of the debt claimed shall be increased by the costs incurred in its recovery, which will

be subject to a penalty clause of no less than 15% of the debt, all without prejudice to KIDE's right to claim any damages caused by the customer's non-compliance.

- The non-payment of a debt on its due date shall automatically result in early termination and the payment of the entire remaining balance due, as well as the precautionary suspension of deliveries and works.
- KIDE guarantees its equipment against all material and manufacturing defects for a period of 12 months from delivery or a maximum of 14 months from the date it is made available. This warranty obligation consists EXCLUSIVELY of the replacement of the part of the product recognised as being defective, and does not include: transport, refrigerant, installation, assembly or disassembly costs, nor any damages that may have been caused.
- The product delivered in replacement of the defective product shall be guaranteed under the same terms and conditions applicable to the replaced product and for the remaining period of the warranty.
- The warranty shall only apply if the equipment has been transported, stored and handled in accordance with KIDE's instructions, has not been mistreated or damaged by accident or negligence of the customer or third parties, and has been operated only by KIDE's own personnel or personnel authorised by KIDE.
- KIDE's liability for all claims arising from an order is limited to the total amount of the order. The customer waives any further claims for damages.
- The replaced material shall become the property of KIDE unless its destruction is authorised. In the event of an express request for its return, this will be carried out within a maximum of 15 days. In such a case, KIDE shall bear the costs arising from the return and/or delivery of the defective material.
- Other expenses, such as those arising from the travel of technical personnel or labour, are not included and shall be borne by the customer.
- KIDE also guarantees the availability of spare parts, either of the components concerned or of the functional parts into which they are integrated, for a period of 5 years.
- In order to guarantee the quality of the equipment supplied and prior to delivery of such equipment, KIDE S. Coop accepts inspection at its facilities by a specialised laboratory with the costs derived from this inspection being borne by the customer.
- In no event shall KIDE be liable for indirect damages caused to the Customer or any third party for operating losses, loss of sales, revenue or interruption to business or services, loss of profits or other indirect, intangible, non-economic or consequential losses or for losses of a similar kind.
- When the ASSEMBLY service is contracted, it shall be guaranteed for FIFTEEN DAYS from the date of completion of the assembly.
- In the case of marketed products not manufactured by KIDE, the warranty of the manufacturer of said products shall subsist, under the conditions established by the manufacturer, which KIDE shall pass on to the customer.
- The buyer shall hold KIDE harmless from any claims received from third parties for any cause other than a manufacturing defect of the products, as well as from all expenses incurred in the defence against such claims.
- The Buyer is obliged to inspect the products upon receipt. KIDE shall not be liable for any apparent defects once the goods have been

received if they are not checked and the delivery note is not signed as compliant, or if the appropriate complaint is not made within 24 hours.

Likewise, the Buyer shall be obliged to check the measurement and thickness specifications upon receipt of the material delivered by KIDE and, by virtue of this, the Buyer thereby waives any type of claim on the aforementioned specifications if it has already proceeded with the transformation, placement or arrangement of the delivered material. In the event of claims regarding deviations between the quality of the material agreed between KIDE and the Buyer and the quality of the material actually delivered, they shall only be admissible when the quality defect is certified by the Buyer. In the event that the reason for any damage to the material is due to misuse or improper application of the product by the Buyer, the Buyer shall be exclusively responsible for such damage.

In any case, KIDE shall not be liable for:

- Damage to the coating of the material caused by moisture or other contamination detrimental to the coating resulting from improper storage of such material by the Buyer. Furthermore, the same shall apply in the event that the material is damaged during transport, handling, installation and assembly at the Buyer's premises and/or by any other act of negligence attributable to the Buyer or to third parties other than KIDE.
- Damage to the material caused by the cutting of the panels on site by the Buyer or by a third party other than KIDE, which may lead to a modification of the technical characteristics of the material and affect its performance.
- Damage to the material caused by water or by any corrosive product once it has left KIDE.
- Appearance of pockets or 'blistering' in the sandwich panel, as well as any other type of aesthetic defects that do not affect the functionality of the KIDE materials delivered to the Buyer.
- The Buyer undertakes to sign the delivery note for the material and/or the acceptance certificate for the installations once it has been received. In any event, the material shall be deemed to have been accepted without reservation from the moment it begins to be used.
- In the resolution of any question or dispute which may exist between the parties regarding the validity, interpretation, execution and/or termination of the contract, the parties shall be subject to the exclusive jurisdiction of the Courts and Tribunals corresponding to the registered offices of KIDE. This Contract is subject to Spanish law.

Note: KIDE is not responsible for any errors or misinterpretations of the information contained in the catalogue or price list. It also reserves the right to modify the data and values contained therein without prior notice. Such data does not constitute a contractual guarantee.

KIDE, S.Coop. Ltda. Official Reg. of Coop. of the Min. of Lab. No. 20750
- Reg. of Cooperatives of the Basque Government no. VI-215119/86
Tax ID (NIF): F-48071377



HEADQUARTER

Polígono Gardotza, 1
48710 BERRIATUA
Bizkaia (Spain)

Tel: +34 94 603 62 00

e-mail: kide@kide.com
www.kide.com



6.2025

