


# Service

## MOD. N40

Semi-insulated pivot service door, available in single or double leaf, designed to provide a practical, hygienic, and efficient solution. It is designed for commercial use.

**PIR**  
FOAM DOOR

MADE IN  
**EUROPE**

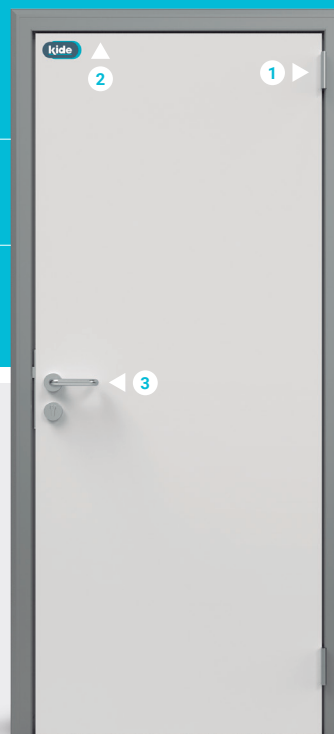

Single and double models.



Stainless steel hardware.



Custom made doors.



Simple and hygienic door designed for rooms in positive temperature such as offices, work rooms, etc.



Suitable for use with panels or walls of any thickness.




Pre-installed doors. Easy assembly.


1 Hinge



2 Aluminium frame

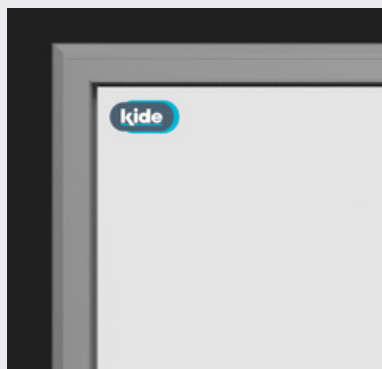

3 Handle

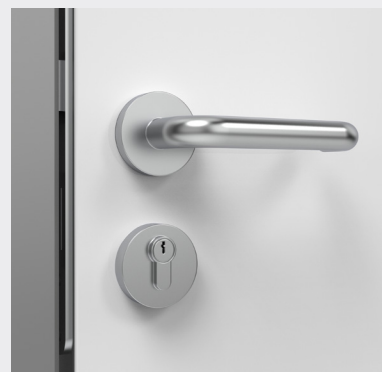

## LEAF

### CONSTRUCTION / MATERIALS

- Manufactured with an anodised aluminium structural profile frame.

### COATING

- Galvanised and lacquered steel sheet with 25 µm polyester paint.
- White RAL 9010.
- Coated with a removable protective film.
- Food safe use.

### INSULATION

- High-pressure injected polyisocyanurate (PIR) foam with a density of 40-43 Kg/m<sup>3</sup>.

### THICKNESS

- 40 mm.

## FRAME


- The profiles are made of powder-coated aluminum in RAL 9006, providing a uniform and durable finish. The frame incorporates an EPDM gasket, ensuring optimal airtightness and contributing to the overall insulation performance. In addition, it has a system with hidden self-tapping screws, delivering a clean, safe, and aesthetically refined result.

## FITTINGS


- The door is equipped with a handle and hinges made of stainless steel. In the case of double doors, the system is completed with integrated bolts, which ensure a safe and functional closure of the assembly.

## OPTIONS


- Other coating finishes.



\* LAC 9010




\* PVC (S5)




\* PET (K5)



\* STAINLESS STEEL (I6)



\* PVC (C5)



\* LAC SILVER (Q5)



\* LAC BLUE (E5)




\* LAC BLACK (L5)


- Frame prepared to install on a brick wall.
- Door stopper.
- Door closer.
- Lock with key.
- Lock with latch.
- Electric lock.
- Methacrylate window 350 x 600.
- Anti-panic bar.
- Anti-panic bar in doors with max 2500 mm height.
- 850 mm high kickplate.
- Overhead rail passage.



## TECHNICAL DETAILS

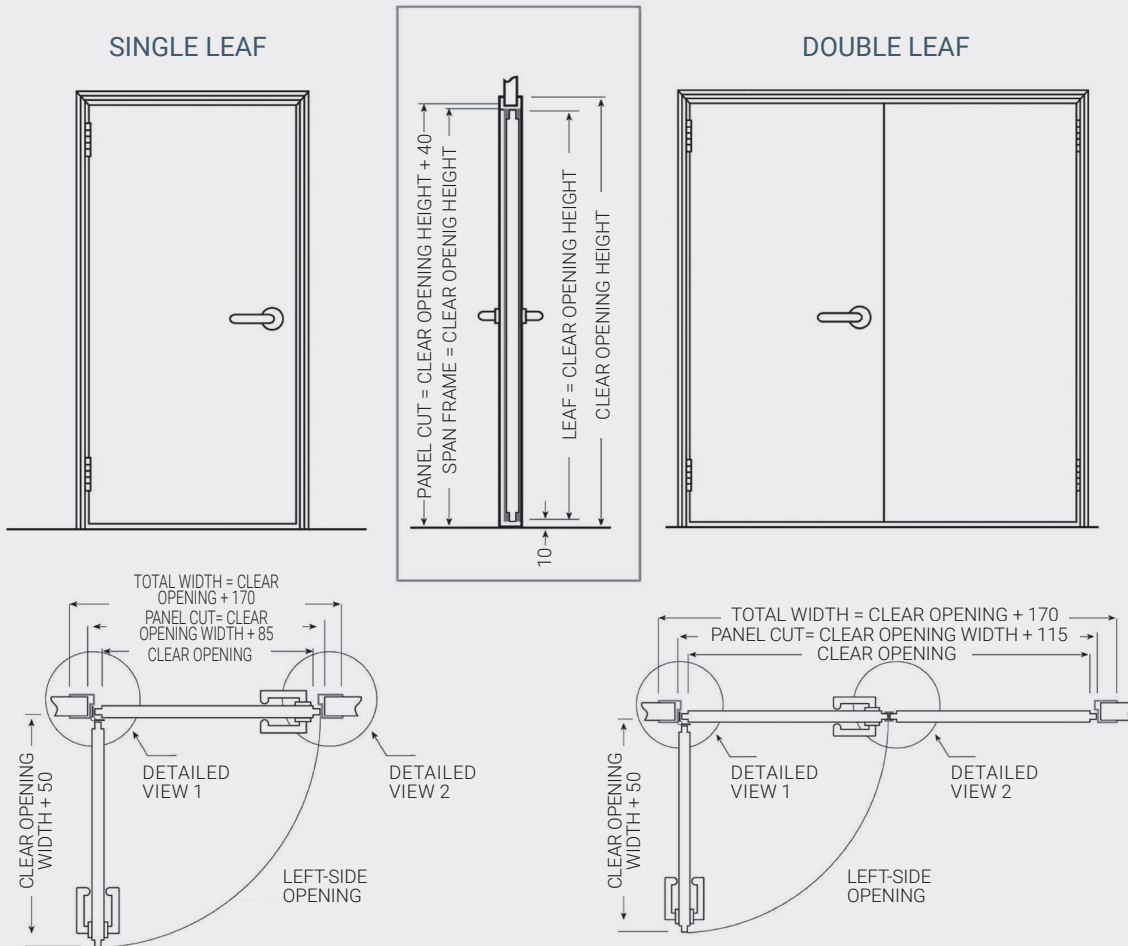

CLEAR OPENING WIDTH	CLEAR OPENING HEIGHT	NO. HINGES
≤ 950	< 2200	2
> 950	< 2200	3
≤ 1200	≥ 2200	3
MAX. 1200	MAX. 3000	

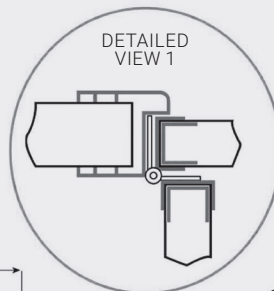

CLEAR OPENING WIDTH	CLEAR OPENING HEIGHT	NO. HINGES
≤ 1900	< 2200	4
> 1900	< 2200	6
≤ 2400	≥ 2200	6
MAX. 2400	MAX. 2400	

