


Sliding service

MOD. NC40

Semi-insulated sliding service door, available in single or double leaf, designed to provide a practical, hygienic, and efficient solution. It is designed for commercial use.

PIR
FOAM DOOR

MADE IN
EUROPE

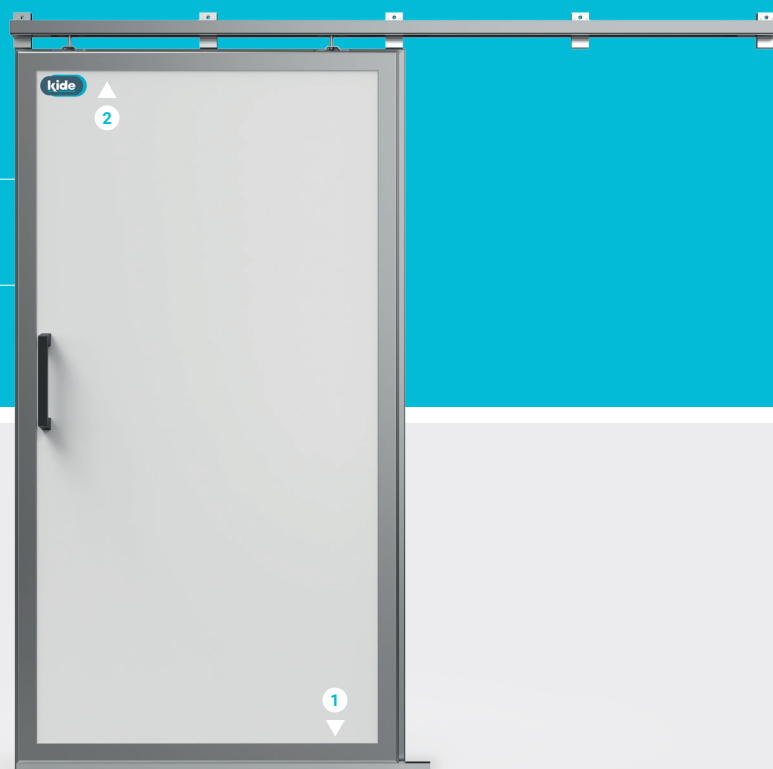

Simple and hygienic door designed for rooms in positive temperature such as offices, work rooms, etc.



Single-leaf and double-leaf models.




Injected leaf.



Pre-installed doors. Easy assembly.

1 Guide

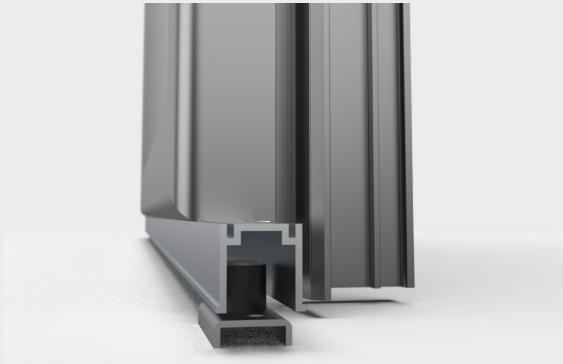

2 Aluminium frame



LEAF

CONSTRUCTION / MATERIALS

- Manufactured with an anodised aluminium structural profile frame.

COATING

- Galvanised and lacquered steel sheet with 25 µm polyester paint.
- White RAL 9010.
- Coated with a removable protective film.
- Food safe use.

INSULATION

- High-pressure injected polyisocyanurate (PIR) foam with a density of 40-43 Kg/m³.

THICKNESS

- 40 mm.

FRAME


- Profiles made of powder-coated aluminum in RAL 9006. It has the option of a frame prepared to install on a brick wall and a system with hidden self-tapping screws.

FITTINGS

- Anodized aluminum rails with a bottom guiding system, internal finger pull, and external aluminum handle.

OPTIONS


- Other coating finishes.



* LAC 9010




* PVC (S5)




* PET (K5)



* STAINLESS STEEL (I6)



* PVC (C5)



* LAC SILVER (Q5)



* LAC BLUE (E5)




* LAC BLACK (L5)


- Frame prepared to install on a brick wall.
- 850 mm high kickplate.

TECHNICAL DETAILS


SINGLE LEAF	
CLEAR OPENING WIDTH	CLEAR OPENING HEIGHT
MAX. 2000	MAX. 3000

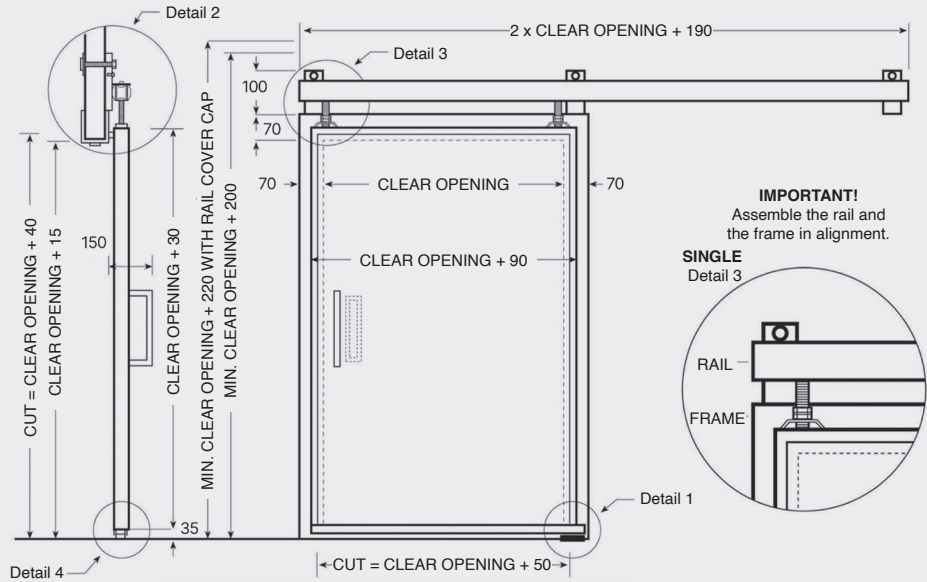


SINGLE / DOUBLE
Detail 1




SINGLE / DOUBLE
Detail 2



DOUBLE
Detail 3



SINGLE / DOUBLE
Detail 4



DOUBLE LEAF	
CLEAR OPENING WIDTH	CLEAR OPENING HEIGHT
MAX. 4000	MAX. 3000

