

Display windows

MOD. VT

Pre-assembled display window designed for positive-temperature rooms, enabling visibility and interaction between spaces while maintaining hygienic conditions.

MADE IN
EUROPE



Suitable for positive-temperature environments.



Simple and hygienic solution.



Pre-assembled window. Quick and simple installation.



Custom manufacturing.



FRAME

ALUMINIUM FRAME

- Lacquered aluminium frame with thermal bridge break, ensuring optimal airtightness.
- Counterframe designed to accommodate the existing panel's thickness.
- Equipped with an EPDM gasket to ensure maximum airtightness.
- Multiple finishes available:
 - RAL 9010 white finish.
 - RAL 7016 grey finish.



GLASS

- Standard system: 4+12 (air) + 4.
- Inner glass (4 mm) + Air chamber (12 mm) + Outer glass (4 mm).



MAXIMUM DIMENSIONS

MAXIMUM WIDTH	mm	5.800
MINIMUM HEIGHT	mm	250

From 2 m² upwards it has a vertical crossbar.




OPTIONS

- To avoid glass breakage:
 - Lamiglass system: 3 + 3 + 8 (air) + 3 + 3. Upon request.
 - Freezer rooms:
 - Special system: 3 + 3 + 12 (argon) + 4 + 4. Upon request.
 - Sliding and tilt-and-turn windows. Upon request.



TECHNICAL DETAILS

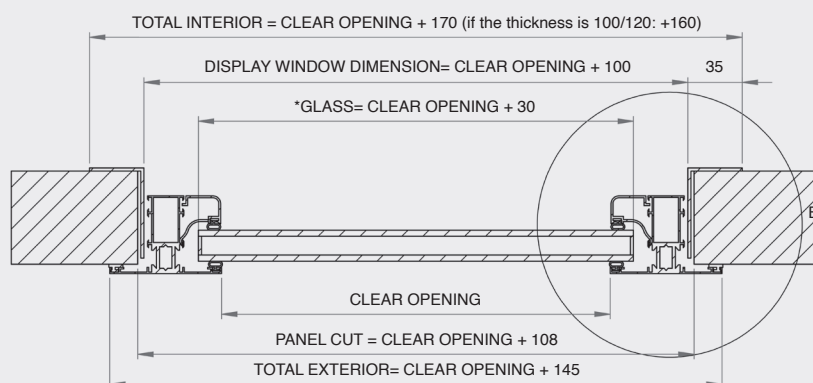

* a-With Glass
Divider = (Clear Opening - 72) + 30

* b-With Glass
Divider = (Total Glass Length - 42)/2