


# Fire-rated insulated **hinged doors**

**kide**



## PEI-60

**Leaf:** 120 mm thickness.


- Finishes: lacquered or stainless steel with AISI 304 stainless steel AISI 304 stainless steel surrounding with 1.2 mm thickness.
- Rock wool insulation with 15 mm thick plasterboard plate.
- Intumescent gaskets
- Perimetral PVC gasket to ensure the watertightness of the the sealing of the enclosure

AISI 304 **stainless steel frame** con 1,2 mm thick, ready for brickwork assembly.

The freezer doors ( $-20^{\circ}\text{C}$ ) are fitted with heating resistors throughout the entire perimeter of the frame and bottom and treshold plate.




AISI 304 stainless steel **fittings**.

**Accessories:** colours according to colour chart, fireproof vision panel, lower bumpers, panic lock, key, etc.

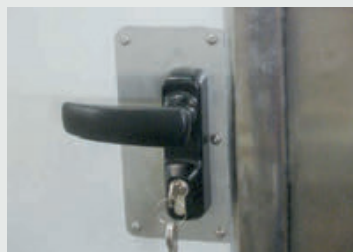


# Fire-rated insulated **hinged doors**


**kide**

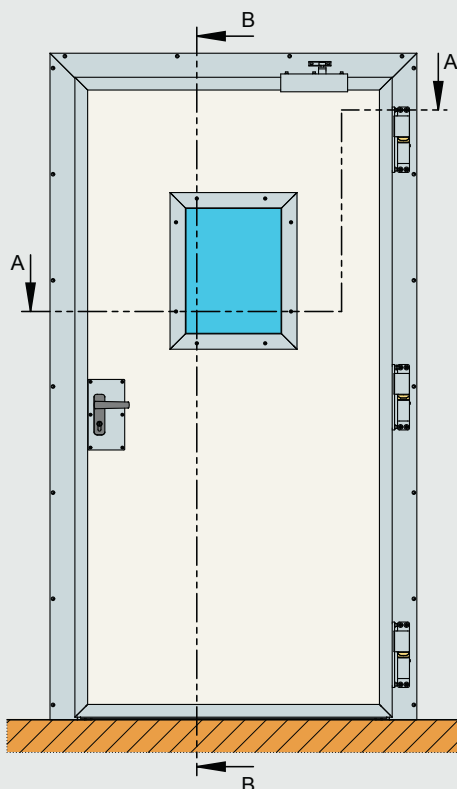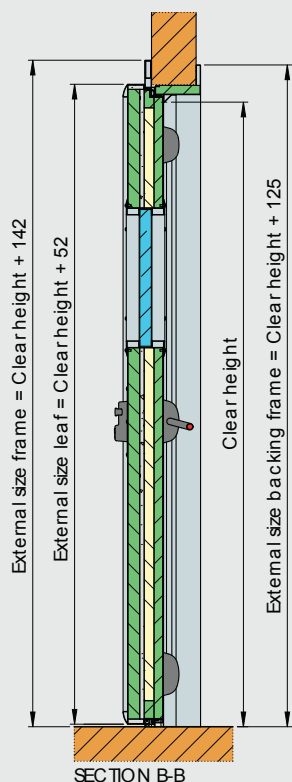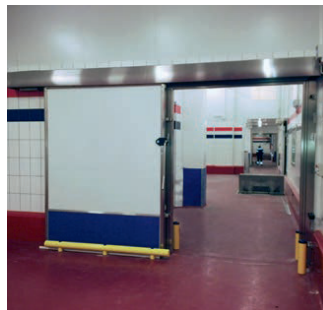

| CUT-OUT DIMENSIONS         |                       |
|----------------------------|-----------------------|
| Clear width                | Clear height          |
| 60 + clear dimensions + 60 | 60 + clear dimensions |

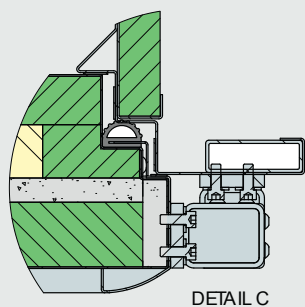


Door **type A**

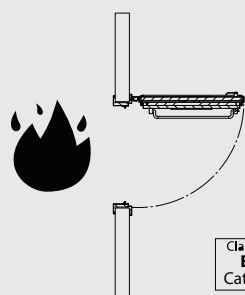

Classification  
**EI2-90**  
Category **A**

Door **type B**

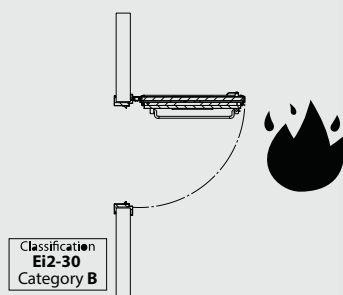

Classification  
**EI2-30**  
Category **B**

